



Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[61885-0621LF](#)

For any questions, you can email us directly:
sales@integrated-circuit.com








PRODUCT NO	NUMBER OF POS.	LOADED POSITION	HSG COLOR	PLATING
61885-0661	6	ALL POS.	BLACK	5u" Au + high performance lubricant
61885-0641		2,3,4,5		
61885-0621		3,4		
61885-0661LF		ALL POS.		
61885-0641LF		2,3,4,5		
61885-0621LF		3,4		

LEAD FREE PRODUCT NO.

NOTES:

- RECOMMENDED P.C.B. THICKNESS 1.60 MM
- HOUSING MAT'L: NYLON 66, 25% GLASS REINFORCED, COLOR: SEE TABLE
- CONTACTS: PHOS BRONZE ALLOY UNS-C51000, Ø 0.460 ROUND WIRE, PLATING SEE TABLE.
- METAL SHELL MATERIAL: COPPER ALLOY, 0.20MM THICK. FINISH: FOR 61885-XXXX TIN-LEAD 100 u" THICK . FOR 61885-XXXXLF PURE TIN 80 u" THICK .
- PACKAGING PER GES-14-361, USING TUBE
- IF LF P/N THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED INS GS-22-008
- IF LF P/N THE HOUSING WILL WITHSTAND EXPOSURE TO 260° PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.60mm MINIMUM THICK CIRCUIT BOARD
- IF LF P/N PACKAGING MEETS GS-14-920 SPECIFICATION

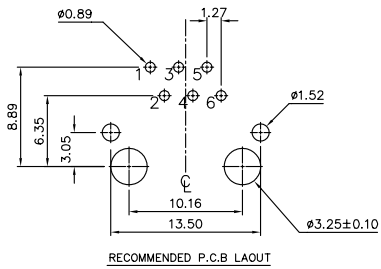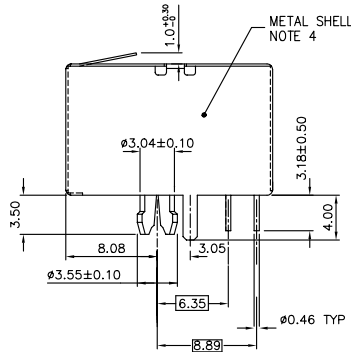

mat'l. code	surface	tolerance	projection	product family
	ISD1302 ✓	ISD1101 ISD406	mm	MOD JACK
l tr ecn ndar date	tolerances unless otherw	angles	scale	title
C T80510 MW 11/18/98	0.X±0.3	mm	2.0	LOW PROFILE PCB III 6 POS
D T03-0443 WL 10/06/03	0.XX±0.15	mm		MOD JACK, FULLY SHIELDED
E N04-0125 YS 12/15/04	0.XXX±0.05	mm		
F BLX-N-011021 SH MW 03/25/12	dr	C M HSU 03/27/97		dwg no sheet 1 of 1 size
	engr	TONY CHIEN 03/27/97		61885 A4
	chr	TONY CHIEN 03/27/97		type Product Customer Drawing
	appd	JENN TSAO 03/27/97		
sheet revision				
index sheet 1				