

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)

[71600-010LF](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

PRODUCT NUMBER

71600-YXXLF


- LEAD FREE, SEE NOTE 6
- TOTAL NB OF POSITION 04 TO 64
SEE SHEET 2
- OPTIONAL STRAIN RELIEF
SEE SHEET 2

TRIANGLE INDICATES
POSITION 1
NOTE 5

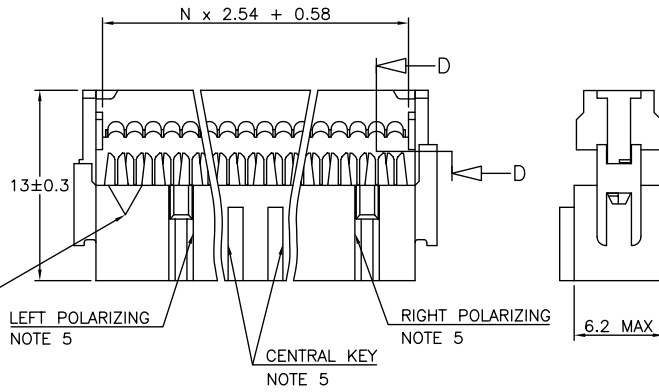

NOTES:

- 1 - PLASTIC MAT'L : GLASS FILLED HIGH TEMPERATURE THERMOPLASTIC. UL94V-0 COLOR: GREY
- 2 - PIN MATERIAL : PHOSPHOR BRONZE
- 3 - PRODUCT PACKAGED IN TUBES.
- 4 - TO DETERMINE DIMENSIONS :
N = NUMBER OF POSITIONS PER ROW
EXAMPLE : 8 POS N x 2.54 = 20.32mm
- 5 - 2x5, 2x6, 2x7 HAVE NO LEFT POLARIZING SLOT.
- 2x2, 2x3 WITH CENTRAL KEY HAVE NO TRIANGLE, NO LEFT AND RIGHT POLARIZING SLOT.
- 2x2 WITHOUT CENTRAL KEY HAS NO LEFT AND RIGHT POLARIZING SLOT.
- 2x3, 2x4 WITHOUT CENTRAL KEY HAVE NO LEFT POLARIZING SLOT
- 2x4 WITH CENTRAL KEY HAVE NO LEFT AND RIGHT POLARIZING SLOT
- 6 - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS PER GS-22-008. PACKAGING SPECIFICATION AS PER GS-14-920.

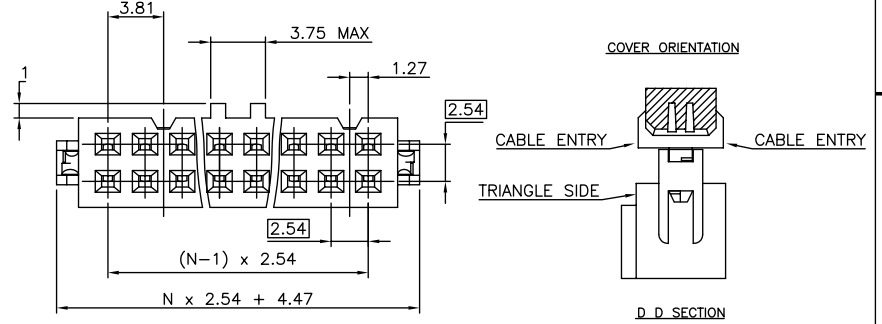

mat'l. code SEE NOTES	surface ISO 1302	tolerance ISO 406 ISO 1001	projection	product family 2.54MM IDC
ltr ecn no dr date	tolerances unless otherwise specified	linear	mm	title QUICKIE III FEM 0.76µm Au
AP F12-0048 LMU 12.04.25	angles	X.X ±0.3	mm	dwg no
AR B-17851 LMU 14.06.05	linear	X.XX ±0.13	mm	71600
	linear	X.XXX ±0.05	mm	sheet 1 of 2 size A3
AK F05-0180 LMU 05.04.22	dr	D.LE	01.01.24	FCI
AL F06-0270 LMU 06.09.12	engr	P.NZ	01.01.24	type CUSTOMER Drawing
AM F06-0274 LMU 06.09.25	chr	JF.N	01.01.24	
AN F09-0233 LMU 09.12.15	app	P.NZ	01.01.24	
sheet index	revision	AR	AF	
	sheet	1	2	

PDS: Rev :AR

STATUS:Released


Printed: Jun 06, 2014

FCI
FCIconnect.com
Copyright FCI


STRAIN RELIEF OPTION AVAILABILITY	Nbr OF POSITIONS
1/6	04
0/1/2/3/6	06
0/1/2/3/6	08
0/1/2/3/6	10
0/1/2/3/6	14
0/1/2/3/6	16
0/1/2/3/6	18
0/1/2/3/6	20
0/1/3	24
0/1/2/3/6	26
0/1/2/3/6	30
0/1/2/3/6	34
0/1/2/3/6	40
0/1/2/3/6	50
0/1/2/3/6	60
0/1/2/3/6	64

624
304
204 / 224
004
DASHES NOT AVAILABLE


PLATING
0.76µm GOLD ON CONTACT AREA
1.27 µm Ni REMAINDER OF PRODUCT




WITHOUT STRAIN RELIEF




WITH LOW PROFILE STRAIN RELIEF



WITH STANDARD STRAIN RELIEF



WITH LATCHING STRAIN RELIEF

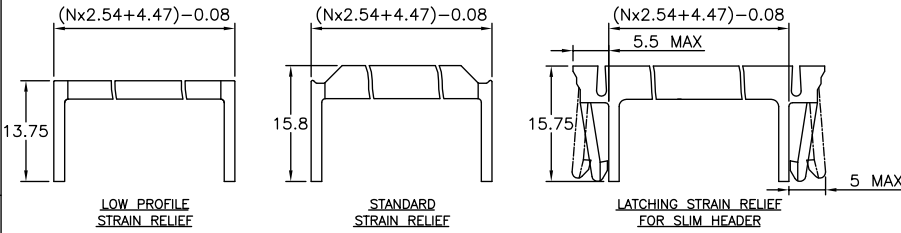

LOW PROFILE STRAIN RELIEF

STANDARD STRAIN RELIEF

LATCHING STRAIN RELIEF FOR SLIM HEADER

PRODUCT NUMBER	STRAIN RELIEF					
	WITH CENTRAL KEY	WITHOUT CENTRAL KEY	STANDARD	WITHOUT	LOW PROFILE	LATCHING
71600-6YYLF	●					●
71600-3YYLF		●	●			
71600-2YYLF	●				●	
71600-1YYLF	●			●		
71600-0YYLF	●		●			

mat'l. code	surface	tolerance	projection	product family
	ISO 1302	ISO 446 ISO 1101	QUICKIE	
lfr ecn no dr date	tolerances unless otherwise specified	angles	linear	mm
AF B-17851 LMU 14.06.05			scale N/A	FCI
AA F10199 GCO 01.04.26				product family QUICKIE
AB F03019 DLE 03.01.23	dr D.LE 01.01.24			title IDC RECEPT DR
AC F05-0180 LMU 05.04.22	engr P.N.Z 01.01.24			dwg no 71600 sheet 2 of size A3
AD F06-0270 LMU 06.09.12	chr J.F.N 01.01.24			type CUSTOMER Drawing
AE F06-0274 LMU 06.09.25	app P.N.Z 01.01.24			
sheet index	revision sheet			