


Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[86092646114755E1LF](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

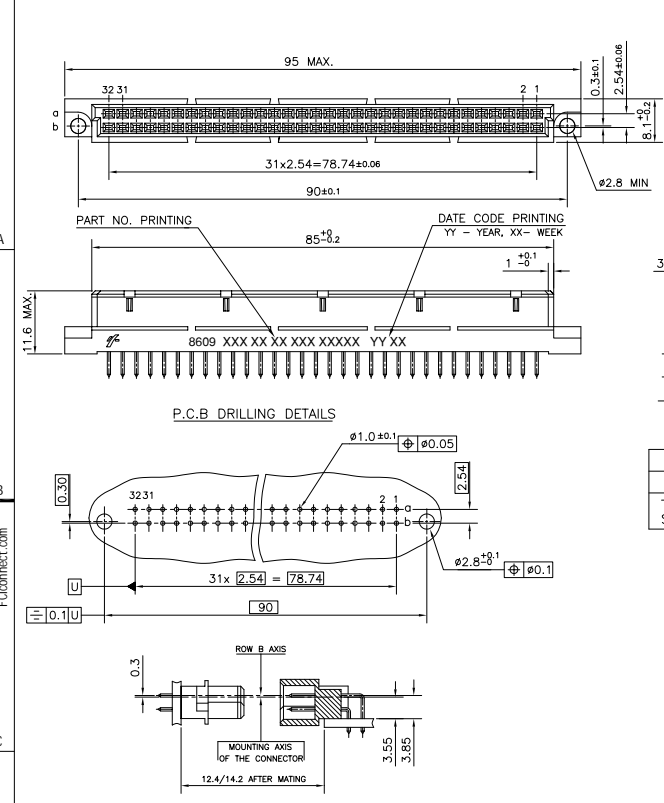

SERIES	8609	2	64	6	1	14	7	5	5	000E1
ROWS FITTED WITH CONTACTS										
Rows a b			64							
Rows c			1	32						
NUMBER OF CONTACTS										
TYPE OF INSULATOR										
2 ROW FEMALE INSULATOR										6
METHOD OF MOUNTING										
STANDARD MOUNTING - STYLE B										1
TERMINATION										
LONG STRAIGHT SPILL (L - SEE TABLE)										14
SHORT STRAIGHT SPILL (L - SEE TABLE)										24
OPTIONS										
NO OPTION										7
PERFORMANCE CLASS										
4 - DIN 41612 CLASS 3										4
5 - DIN 41612 CLASS 2										5
6 - DIN 41612 CLASS 1										6
8 - AS PER MIL C 55302/ISS 50808										8
PITCH PER ROW										
2.54										5
000E1										TIN LEAD VERSION
E1LF										LEAD FREE VERSION

NOTES:-

1. THE "LF" PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
2. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 3.5 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6 MM MINIMUM THICK CIRCUIT BOARD
3. LEAD FREE OR RoHS DIRECTIVE LABELING TO BE PROVIDED AS PER GS-14-920 FOR LEAD FREE VERSION.

mat'l. code	surface	tolerance	projection	product family
	ISO 1302	ISO 406 ISO 1101		8609
ltr	ecn	no	dr	date
A	I04-0100	MIN	2004-11-09	
B	I05-0042	MIN	2005-05-19	
C	I06-0062	MIN	2006-06-01	
D	I06-0187	MIN	2006-10-10	
		engr	RAKHEE GEORGE	2004-09-22
		chr	RAKHEE GEORGE	2006-10-10
		appd	RAKHEE GEORGE	2006-10-10
sheet	revision	D		
index	sheet	1		
				title
				DIN STANDARD RECEPTACLE
				STRAIGHT SPILL DIN 41612 STYLE-B
				dwg no
				C-8609-2020
				sheet 1 of 1
				size
				A3
				type
				Product Customer Drawing