

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:





[FCI](#)
[HM2R30PA5100N9LF](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans l'autorisation écrite de la propriété de FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authorization of FCI. Copyright FCI.

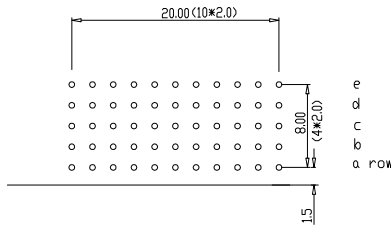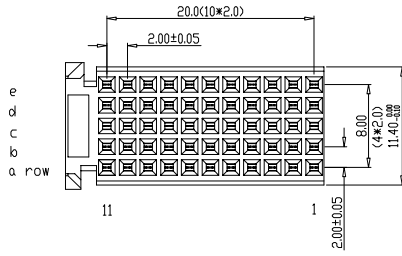

PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
 1 A AT 70°C (FULLY LOADED)
 RATED VOLTAGE : 500 V AC (CONT /CONT)
 OPERATING TEMPERATURE : -55°C TO 125°C
 CONTACT RESISTANCE 20 MΩ MAX
 INSERTION FORCE : 0.75N MAX/CONT
 EXTRACTION FORCE : 0.15N MIN/CONT
 INSULATION RESISTANCE : 10⁴ MΩ MIN

- NOTES 1' LEAD FREE INDICATOR (LF-LEAD FREE)
 PERFORMANCE LEVEL INDICATOR (REF DWG NO.BSC 201844.003)
 2. THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
 3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BSA201572.001
 4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

Material		Spec ref		tolerance DIEC ± 0.2 DIEC SPEC ± 0.1 DIEC ANGLES ± 1° HOEKEN		projection 		MM	
Mat code									
Heattreat									
Plating/Finish									
Dr	W.Panis	07-04-92	Product family		MILLIPACS		size	A4	Scale
Eng			Model Name		ECN				
Chr			Model Revision		REL Level				
Appr									
		title		MPACS 5+2R RA RCP CONN TYPE C		P.O. NO		BSC201418021	
Pro/E file		catalog no		HM2R30PA5100----		CUSTOMER DRAWING		sheet 1 of 1	