

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Texas Instruments](#)
[LMP2015MAX/NOPB](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

LMP2015 Single/LMP2016 Dual High Precision, Rail-to-Rail Output Operational Amplifier

Check for Samples: [LMP2015](#), [LMP2016](#)

FEATURES

- (For $V_S = 5V$, Typical Unless Otherwise Noted)
- Low Ensured V_{OS} Over Temperature 10 μV
- Low Noise with no 1/f 35 nV/ \sqrt{Hz}
- High CMRR 130 dB
- High PSRR 120 dB
- High A_{VOL} 130 dB
- Wide Gain Bandwidth Product 3 MHz
- High Slew Rate 4 V/ μs
- Low Supply Current 930 μA
- Rail-to-Rail Output 30 mV
- No External Capacitors Required

APPLICATIONS

- Precision Instrumentation Amplifiers
- Thermocouple Amplifiers
- Strain Gauge Bridge Amplifier
- ADC Driver

DESCRIPTION

The LMP2015/LMP2016 are the first members of TI's new LMP™ precision amplifier family. The LMP2015/LMP2016 offer unprecedented accuracy and stability in space-saving miniature packaging at an affordable price. These devices utilize patented techniques to measure and continually correct the input offset error voltage. The result is a series of amplifiers which are ultra stable over time and temperature. They have excellent CMRR and PSRR ratings, and do not exhibit the familiar 1/f voltage and current noise increase that plagues traditional amplifiers. The combination of characteristics makes the LMP2015/LMP2016 good choices for transducer amplifiers, high gain configurations, ADC buffer amplifiers, DAC I-V conversion, or any other 2.7V-5V application requiring precision and long term stability.

Other useful benefits of the LMP2015/LMP2016 are rail-to-rail output, a low supply current of 930 μA , and a wide gain bandwidth product of 3 MHz. These extremely versatile features provide high performance and ease of use.

Connection Diagram




Figure 1. 5-Pin SOT-23 Top View




Figure 2. 8-Pin SOIC Top View

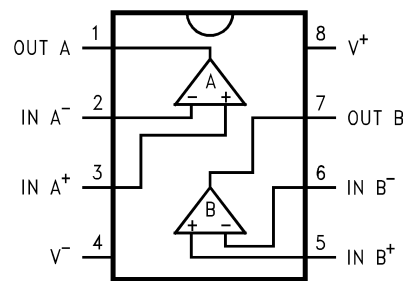


Figure 3. 8-Pin VSSOP Top View



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.

LMP2015, LMP2016

SNOSAX3B – DECEMBER 2007 – REVISED JANUARY 2010

www.ti.com

Absolute Maximum Ratings⁽¹⁾⁽²⁾

| | | |
|--------------------------------------|------------------|---------------------------------------|
| ESD Tolerance ⁽³⁾ | Human Body Model | 2000V |
| | Machine Model | 200V |
| Supply Voltage | | 5.8V |
| Common Mode Input Voltage | | $-0.3 \leq V_{CM} \leq V_{CC} + 0.3V$ |
| Lead Temperature (soldering 10 sec.) | | +300°C |
| Differential Input Voltage | | ±Supply Voltage |
| Current at Input Pin | | 30 mA |
| Current at Output Pin | | 30 mA |
| Current at Power Supply Pin | | 50 mA |

- (1) Absolute Maximum Ratings indicate limits beyond which damage may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured. For ensured specifications and test conditions, see the Electrical Characteristics.
- (2) If Military/Aerospace specified devices are required, please contact the Texas Instruments Sales Office/ Distributors for availability and specifications.
- (3) Human Body Model, applicable std. MIL-STD-883, Method 3015.7. Machine Model, applicable std. JESD22-A115-A (ESD MM std. of JEDEC) Field-Induced Charge-Device Model, applicable std. JESD22-C101-C (ESD FICDM std. of JEDEC).

Operating Ratings⁽¹⁾

| | |
|----------------------------------|----------------|
| Supply Voltage | 2.7V to 5.25V |
| Storage Temperature Range | -65°C to 150°C |
| Temperature Range ⁽²⁾ | -40°C to 125°C |

- (1) Absolute Maximum Ratings indicate limits beyond which damage may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured. For ensured specifications and test conditions, see the Electrical Characteristics.
- (2) The maximum power dissipation is a function of $T_{J(MAX)}$, θ_{JA} . The maximum allowable power dissipation at any ambient temperature is $P_D = (T_{J(MAX)} - T_A) / \theta_{JA}$. All numbers apply for packages soldered directly onto a PC Board.

2.7V DC Electrical Characteristics

 Unless otherwise specified, all limits ensured for $T_A = 25^\circ\text{C}$, $V^+ = 2.7V$, $V^- = 0V$, $V_{CM} = 1.35V$, $V_O = 1.35V$ and $R_L > 1 \text{ M}\Omega$.

Boldface limits apply at the temperature extremes.

| Symbol | Parameter | Conditions | Min ⁽¹⁾ | Typ ⁽²⁾ | Max ⁽¹⁾ | Units |
|------------|-------------------------------------|---|--------------------|--------------------|------------------------|------------------------------|
| V_{OS} | Input Offset Voltage (LMP2015 only) | | | 0.8 | 5 10 | μV |
| | Input Offset Voltage (LMP2016 only) | | | 0.8 | 5 10 | |
| | Offset Calibration Time | | | 0.5 | 10 12 | ms |
| TCV_{OS} | Input Offset Voltage | | | 0.015 | .05 | $\mu\text{V}/^\circ\text{C}$ |
| | Long Term Offset Drift | | | 0.006 | | $\mu\text{V}/\text{month}$ |
| | Lifetime V_{OS} Drift | | | 2.5 | | μV |
| I_{IN} | Input Current | | | -3 | | pA |
| I_{OS} | Input Offset Current | | | 6 | | pA |
| R_{IND} | Input Differential Resistance | | | 9 | | $\text{M}\Omega$ |
| CMRR | Common Mode Rejection Ratio | $-0.3 \leq V_{CM} \leq 0.9V$ $0 \leq V_{CM} \leq 0.9V$ | 95 90 | 130 | | dB |
| CMVR | Input Common Mode Range | CMRR $\geq 95 \text{ dB}$ | -0.3 | | 0.9 | V |
| | | CMRR $\geq 90 \text{ dB}$ | 0 | | 0.9 | |
| PSRR | Power Supply Rejection Ratio | $V^+ - V^- = 2.7V \text{ to } 5V$, $V_{CM} = 0V$ | 95 90 | 120 | | dB |

- (1) Limits are 100% production tested at 25°C. Limits over the operating temperature range are guaranteed through correlations using statistical quality control (SQC) method.
- (2) Typical values represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration. The typical values are not tested and are not specified on shipped production material.

2.7V DC Electrical Characteristics (continued)

 Unless otherwise specified, all limits ensured for $T_A = 25^\circ\text{C}$, $V^+ = 2.7\text{V}$, $V^- = 0\text{V}$, $V_{CM} = 1.35\text{V}$, $V_O = 1.35\text{V}$ and $R_L > 1\text{M}\Omega$.

Boldface limits apply at the temperature extremes.

| Symbol | Parameter | Conditions | Min ⁽¹⁾ | Typ ⁽²⁾ | Max ⁽¹⁾ | Units |
|-----------|-----------------------------|--|-----------------------|--------------------|-----------------------|-------|
| V_O | Output Swing (LMP2015 only) | $R_L = 10\text{ k}\Omega$ to 1.35V $V_{IN}(\text{diff}) = \pm 0.5\text{V}$ | 2.665 2.655 | 2.68 | | V |
| | | | | 0.033 | 0.060 0.075 | |
| | | $R_L = 2\text{ k}\Omega$ to 1.35V $V_{IN}(\text{diff}) = \pm 0.5\text{V}$ | 2.630 2.615 | 2.65 | | V |
| | | | | 0.061 | 0.085 0.105 | |
| | Output Swing (LMP2016 only) | $R_L = 10\text{ k}\Omega$ to 1.35V $V_{IN}(\text{diff}) = \pm 0.5\text{V}$ | 2.64 2.63 | 2.68 | | V |
| | | | | 0.033 | 0.060 0.075 | |
| | | $R_L = 2\text{ k}\Omega$ to 1.35V $V_{IN}(\text{diff}) = \pm 0.5\text{V}$ | 2.615 2.6 | 2.65 | | V |
| | | | | 0.061 | 0.085 0.105 | |
| A_{VOL} | Open Loop Voltage Gain | $R_L = 10\text{ k}\Omega$ | 95 90 | 130 | | dB |
| | | $R_L = 2\text{ k}\Omega$ | 90 85 | 124 | | |
| I_O | Output Current | Sourcing, $V_O = 0\text{V}$ $V_{IN}(\text{diff}) = \pm 0.5\text{V}$ | 5 3 | 12 | | mA |
| | | Sinking, $V_O = 5\text{V}$ $V_{IN}(\text{diff}) = \pm 0.5\text{V}$ | 5 3 | 18 | | |
| I_S | Supply Current per Channel | | | 0.919 | 1.20 1.50 | mA |

2.7V AC Electrical Characteristics

 $T_A = 25^\circ\text{C}$, $V^+ = 2.7\text{V}$, $V^- = 0\text{V}$, $V_{CM} = 1.35\text{V}$, $V_O = 1.35\text{V}$, and $R_L > 1\text{M}\Omega$. **Boldface** limits apply at the temperature extremes.

| Symbol | Parameter | Conditions | Min ⁽¹⁾ | Typ ⁽²⁾ | Max ⁽¹⁾ | Units |
|-------------------|------------------------------|---------------------------------|--------------------|--------------------|--------------------|------------------------|
| GBWP | Gain Bandwidth Product | | | 3 | | MHz |
| SR | Slew Rate | | | 4 | | V/ μs |
| θ_m | Phase Margin | | | 60 | | Deg |
| G_m | Gain Margin | | | -14 | | dB |
| e_n | Input Referred Voltage Noise | | | 35 | | nV/ $\sqrt{\text{Hz}}$ |
| i_n | Input Referred Current Noise | | | | | pA/ $\sqrt{\text{Hz}}$ |
| $e_{n\text{P-P}}$ | Input Referred Voltage Noise | $R_S = 100\Omega$, DC to 10 Hz | | 850 | | nV _{PP} |
| t_{rec} | Input Overload Recovery Time | | | 50 | | ms |

- (1) Limits are 100% production tested at 25°C . Limits over the operating temperature range are guaranteed through correlations using statistical quality control (SQC) method.
- (2) Typical values represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration. The typical values are not tested and are not specified on shipped production material.

LMP2015, LMP2016

SNOSAX3B – DECEMBER 2007 – REVISED JANUARY 2010

www.ti.com
5V DC Electrical Characteristics

 Unless otherwise specified, all limits ensured for $T_A = 25^\circ\text{C}$, $V^+ = 5\text{V}$, $V^- = 0\text{V}$, $V_{CM} = 2.5\text{V}$, $V_O = 2.5\text{V}$ and $R_L > 1\text{M}\Omega$.

Boldface limits apply at the temperature extremes.

| Symbol | Parameter | Conditions | Min ⁽¹⁾ | Typ ⁽²⁾ | Max ⁽¹⁾ | Units |
|------------|---|--|-----------------------|-----------------------|------------------------|------------------------------|
| V_{OS} | Input Offset Voltage (LMP2015 only) | | | 0.12 | 5 10 | μV |
| | Input Offset Voltage (LMP2016 only) | | | 0.12 | 5 10 | |
| | Offset Calibration Time | | | 0.5 | 10 12 | ms |
| TCV_{OS} | Input Offset Voltage | | | 0.015 | .05 | $\mu\text{V}/^\circ\text{C}$ |
| | Long Term Offset Drift | | | 0.006 | | $\mu\text{V}/\text{month}$ |
| | Lifetime V_{OS} Drift | | | 2.5 | | μV |
| I_{IN} | Input Current | | | -3 | | pA |
| I_{OS} | Input Offset Current | | | 6 | | pA |
| R_{IND} | Input Differential Resistance | | | 9 | | $\text{M}\Omega$ |
| CMRR | Common Mode Rejection Ratio | $-0.3 \leq V_{CM} \leq 3.2$ $0 \leq V_{CM} \leq 3.2$ | 100 90 | 130 | | dB |
| CMVR | Input Common Mode Range | CMRR ≥ 100 dB | -0.3 | | 3.2 | V |
| | | CMRR ≥ 90 dB | 0 | | 3.2 | |
| PSRR | Power Supply Rejection Ratio | $V^+ - V^- = 2.7\text{V to } 5\text{V}$, $V_{CM} = 0\text{V}$ | 95 90 | 120 | | dB |
| V_O | Output Swing (LMP2015 only) | $R_L = 10\text{ k}\Omega$ to 2.5V $V_{IN}(\text{diff}) = \pm 0.5\text{V}$ | 4.96 4.95 | 4.978 | | V |
| | | | | 0.040 | 0.070 0.085 | |
| | | $R_L = 2\text{ k}\Omega$ to 2.5V $V_{IN}(\text{diff}) = \pm 0.5\text{V}$ | 4.895 4.875 | 4.919 | | V |
| | | | | 0.091 | 0.115 0.140 | |
| | Output Swing (LMP2016 only) | $R_L = 10\text{ k}\Omega$ to 2.5V $V_{IN}(\text{diff}) = \pm 0.5\text{V}$ | 4.92 4.91 | 4.978 | | V |
| | | | | 0.040 | 0.080 0.095 | |
| | $R_L = 2\text{ k}\Omega$ to 2.5V $V_{IN}(\text{diff}) = \pm 0.5\text{V}$ | 4.875 4.855 | 4.919 | | V | |
| | | | 0.091 | 0.125 0.150 | | |
| A_{VOL} | Open Loop Voltage Gain | $R_L = 10\text{ k}\Omega$ | 105 100 | 130 | | dB |
| | | $R_L = 2\text{ k}\Omega$ | 95 90 | 132 | | |
| I_O | Output Current | Sourcing, $V_O = 0\text{V}$ $V_{IN}(\text{diff}) = \pm 0.5\text{V}$ | 8 6 | 15 | | mA |
| | | Sinking, $V_O = 5\text{V}$ $V_{IN}(\text{diff}) = \pm 0.5\text{V}$ | 8 6 | 17 | | |
| I_S | Supply Current per Channel | | | 0.930 | 1.20 1.50 | mA |

- (1) Limits are 100% production tested at 25°C . Limits over the operating temperature range are guaranteed through correlations using statistical quality control (SQC) method.
- (2) Typical values represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration. The typical values are not tested and are not specified on shipped production material.

5V AC Electrical Characteristics

$T_A = 25^\circ\text{C}$, $V^+ = 5\text{V}$, $V^- = 0\text{V}$, $V_{CM} = 2.5\text{V}$, $V_O = 2.5\text{V}$, and $R_L > 1\text{ M}\Omega$. **Boldface** limits apply at the temperature extremes.

| Symbol | Parameter | Conditions | Min ⁽¹⁾ | Typ ⁽²⁾ | Max ⁽¹⁾ | Units |
|-------------------|------------------------------|---------------------------------|--------------------|--------------------|--------------------|------------------------|
| GBW | Gain-Bandwidth Product | | | 3 | | MHz |
| SR | Slew Rate | | | 4 | | V/ μs |
| θ_m | Phase Margin | | | 60 | | deg |
| G_m | Gain Margin | | | -15 | | dB |
| e_n | Input-Referred Voltage Noise | | | 35 | | nV/ $\sqrt{\text{Hz}}$ |
| i_n | Input-Referred Current Noise | | | | | pA/ $\sqrt{\text{Hz}}$ |
| $e_{n\text{P-P}}$ | Input-Referred Voltage Noise | $R_S = 100\Omega$, DC to 10 Hz | | 850 | | nV _{PP} |
| t_{rec} | Input Overload Recovery Time | | | 50 | | ms |

- (1) Limits are 100% production tested at 25°C. Limits over the operating temperature range are guaranteed through correlations using statistical quality control (SQC) method.
- (2) Typical values represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration. The typical values are not tested and are not specified on shipped production material.

LMP2015, LMP2016

SNOSAX3B –DECEMBER 2007–REVISED JANUARY 2010

www.ti.com

Typical Performance Characteristics

$T_A = 25^\circ\text{C}$, $V_S = 5\text{V}$ unless otherwise specified.

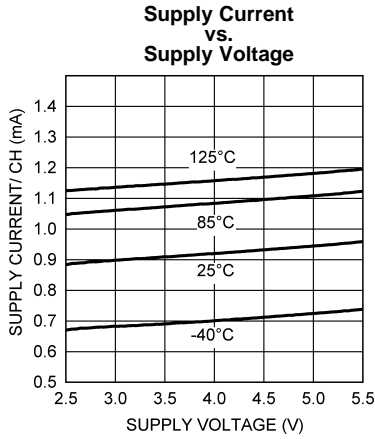


Figure 4.

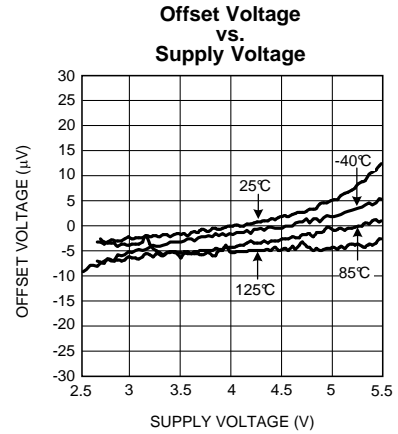


Figure 5.

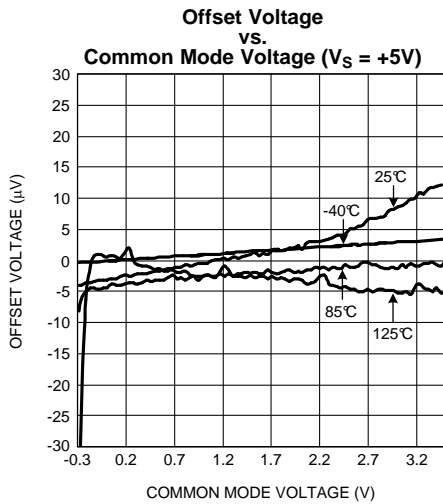


Figure 6.

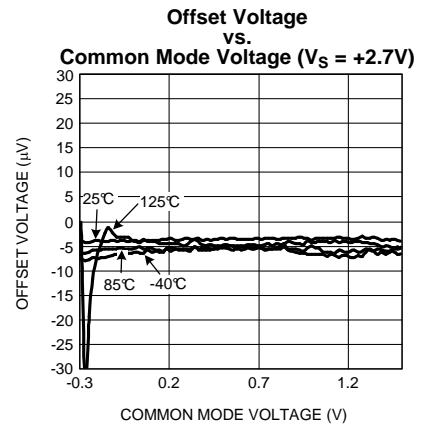


Figure 7.

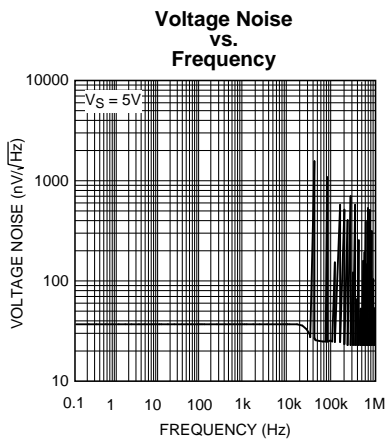


Figure 8.







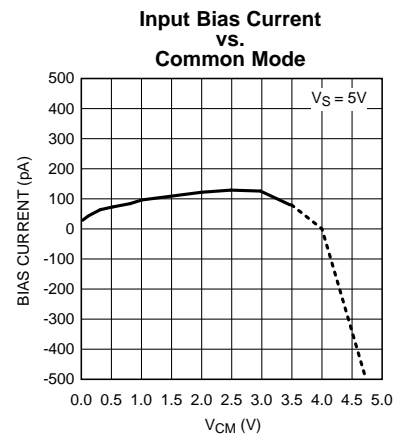


Figure 9.

Typical Performance Characteristics (continued)

$T_A = 25^\circ\text{C}$, $V_S = 5\text{V}$ unless otherwise specified.

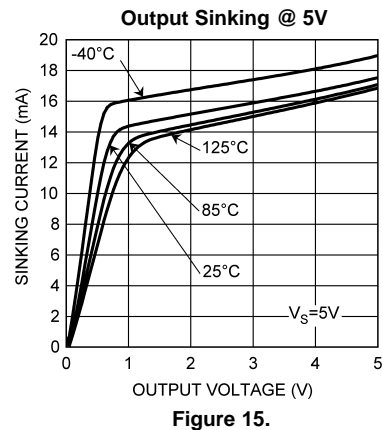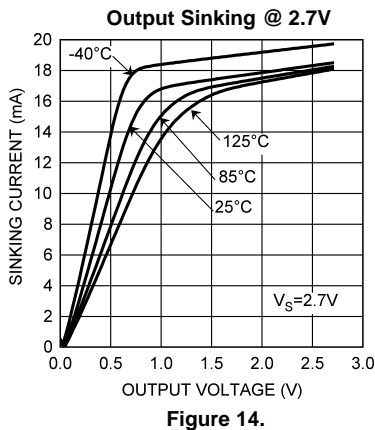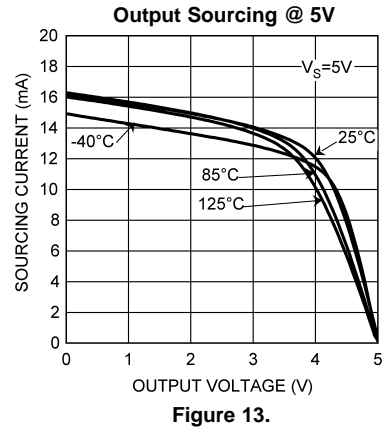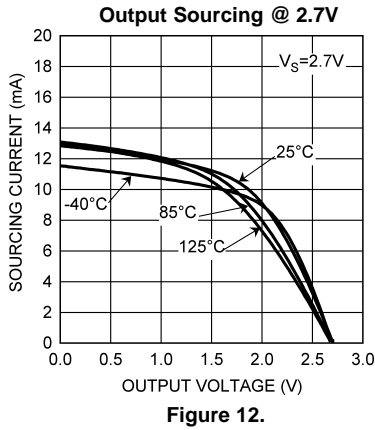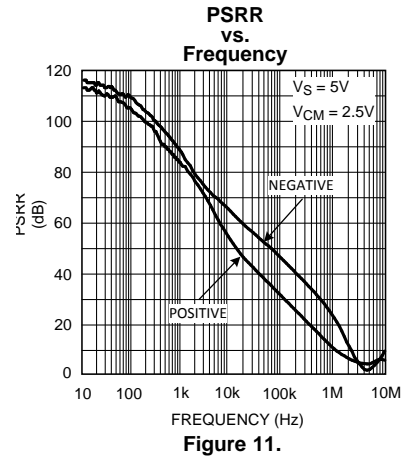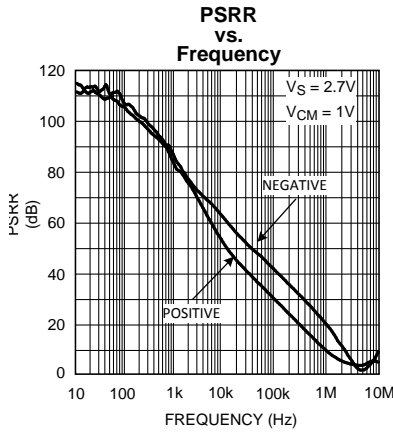

LMP2015, LMP2016

SNOSAX3B –DECEMBER 2007–REVISED JANUARY 2010

www.ti.com

Typical Performance Characteristics (continued)

$T_A = 25^\circ\text{C}$, $V_S = 5\text{V}$ unless otherwise specified.

Maximum Output Swing vs. Supply Voltage

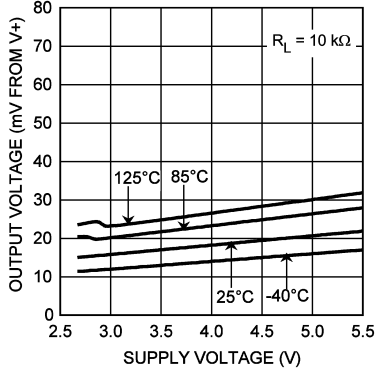


Figure 16.

Maximum Output Swing vs. Supply Voltage

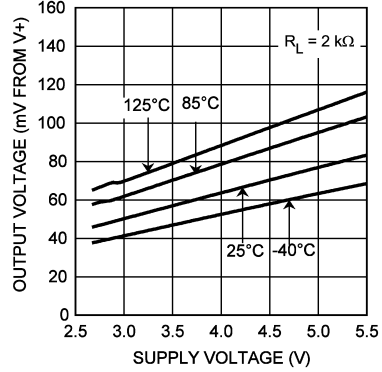


Figure 17.

Minimum Output Swing vs. Supply Voltage

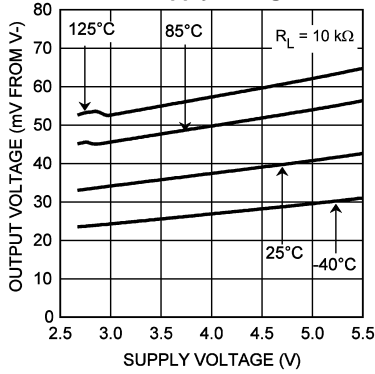


Figure 18.

Minimum Output Swing vs. Supply Voltage

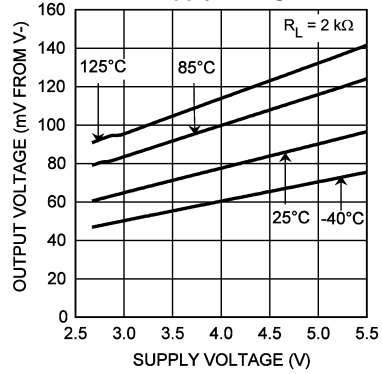


Figure 19.

CMRR vs. Frequency

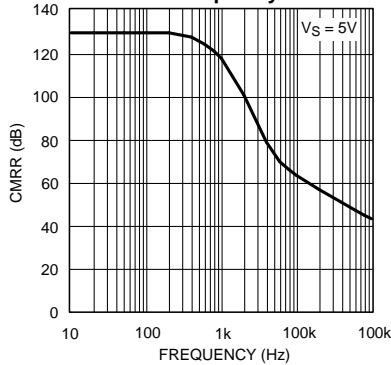


Figure 20.

Open Loop Gain and Phase vs. Supply Voltage

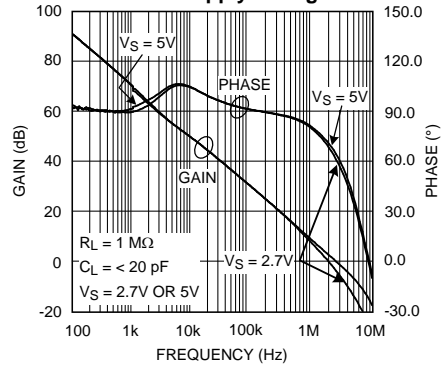


Figure 21.

Typical Performance Characteristics (continued)

$T_A = 25^\circ\text{C}$, $V_S = 5\text{V}$ unless otherwise specified.

Open Loop Gain and Phase vs. Resistive Load @ 2.7V

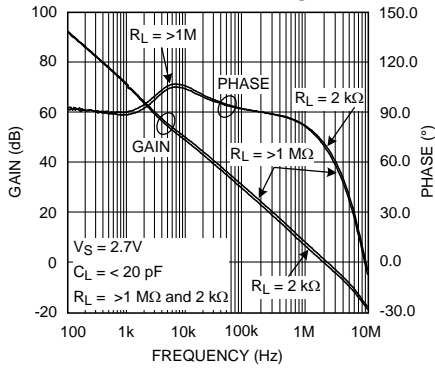


Figure 22.

Open Loop Gain and Phase vs. Resistive Load @ 5V

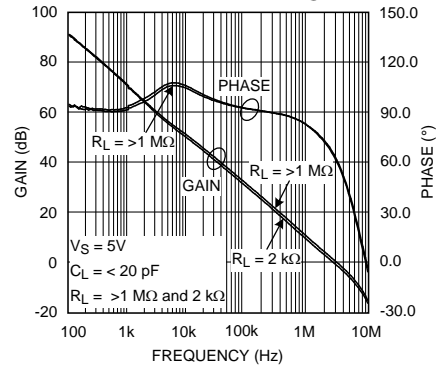


Figure 23.

Open Loop Gain and Phase vs. Capacitive Load @ 2.7V

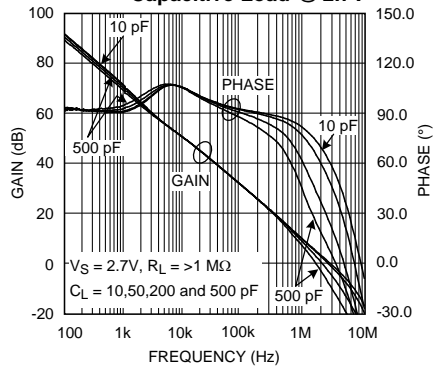


Figure 24.

Open Loop Gain and Phase vs. Capacitive Load @ 5V

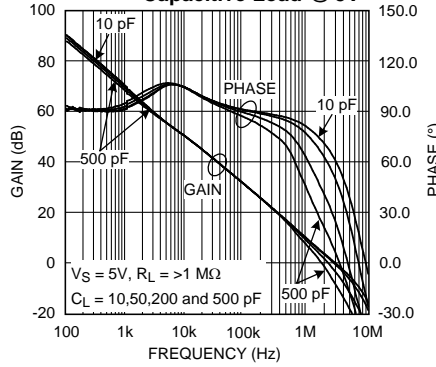


Figure 25.

Open Loop Gain and Phase vs. Temperature @ 2.7V

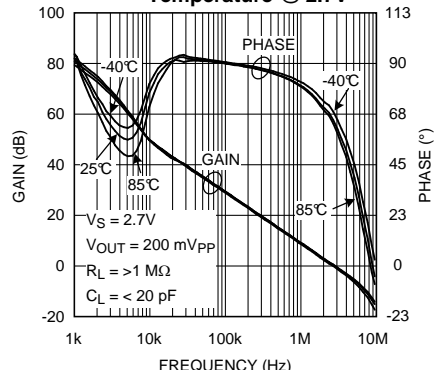


Figure 26.

Open Loop Gain and Phase vs. Temperature @ 5V

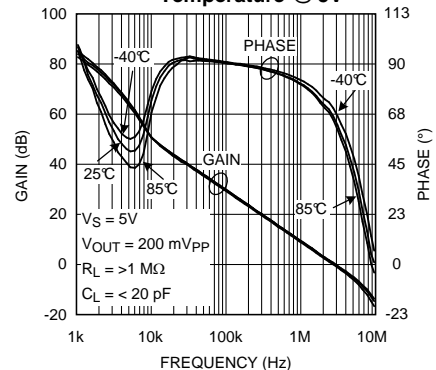


Figure 27.

LMP2015, LMP2016

SNOSAX3B –DECEMBER 2007–REVISED JANUARY 2010

www.ti.com

Typical Performance Characteristics (continued)

$T_A = 25^\circ\text{C}$, $V_S = 5\text{V}$ unless otherwise specified.

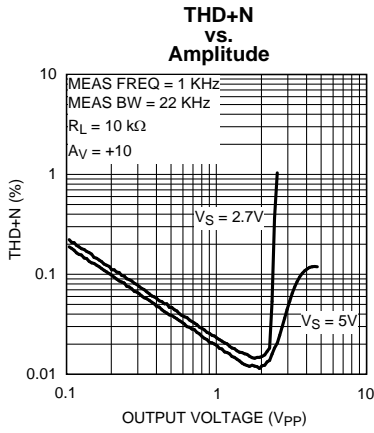


Figure 28.

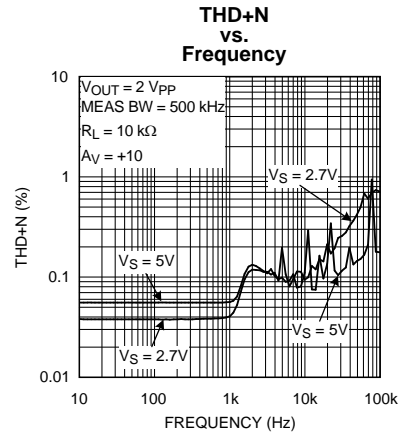


Figure 29.

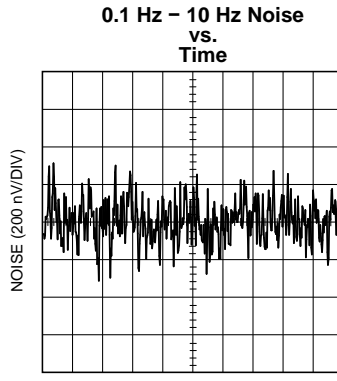


Figure 30.

APPLICATION INFORMATION

THE BENEFITS OF THE LMP2015/LMP2016's NO 1/f NOISE

Using patented methods, the LMP2015/LMP2016 eliminate the 1/f noise present in other amplifiers. That noise, which increases as frequency decreases, is a major source of measurement error in all DC-coupled measurements. Low frequency noise appears as a constantly changing signal in series with any measurement being made. As a result, even when the measurement is made rapidly, this constantly changing noise signal will corrupt the result. The value of this noise signal can be surprisingly large. For example: If a conventional amplifier has a flat-band noise level of $10 \text{ nV}/\sqrt{\text{Hz}}$ and a noise corner of 10 Hz, the RMS noise at 0.001 Hz is $1 \text{ } \mu\text{V}/\sqrt{\text{Hz}}$. This is equivalent to a 0.50 μV peak-to-peak error, in the frequency range 0.001 Hz to 1.0 Hz. In a circuit with a gain of 1000, this produces a 0.50 mV peak-to-peak output error. This number of 0.001 Hz might appear unreasonably low, but when a data acquisition system is operating for 17 minutes, it has been on long enough to include this error. In this same time, the LMP2015/LMP2016 will have only a 0.21 mV output error. This is smaller by 2.4 x. Keep in mind that this 1/f error gets even larger at lower frequencies. At the extreme, many people try to reduce this error by integrating or taking several samples of the same signal. This is also doomed to failure because the 1/f nature of this noise means that taking longer samples just moves the measurement into lower frequencies where the noise level is even higher.

The LMP2015/LMP2016 eliminate this source of error. The noise level is constant with frequency so that reducing the bandwidth reduces the errors caused by noise.

Another source of error that is rarely mentioned is the error voltage caused by the inadvertent thermocouples created when the common "Kovar type" IC package lead materials are soldered to a copper printed circuit board. These steel based leadframe materials can produce over $35 \text{ } \mu\text{V}/^\circ\text{C}$ when soldered onto a copper trace. This can result in thermocouple noise that is equal to the LMP2015/LMP2016 noise when there is a temperature difference of only 0.0014°C between the lead and the board!

For this reason, the lead frame of the LMP2015/LMP2016 is made of copper. This results in equal and opposite junctions which cancel this effect. The extremely small size of the SOT23 package results in the leads being very close together. This further reduces the probability of temperature differences and hence decreases thermal noise.

OVERLOAD RECOVERY

The LMP2015/LMP2016 recover from input overload much faster than most chopper-stabilized op amps. Recovery from driving the amplifier to 2X the full scale output, only requires about 40 ms. Many chopper-stabilized amplifiers will take from 250 ms to several seconds to recover from this same overload. This is because large capacitors are used to store the unadjusted offset voltage.

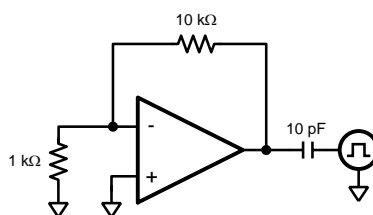


Figure 31. Overload Recovery Test

The wide bandwidth of the LMP2015/LMP2016 enhance performance when it is used as an amplifier to drive loads that inject transients back into the output. ADCs (Analog-to-Digital Converters) and multiplexers are examples of this type of load. To simulate this type of load, a pulse generator producing a 1V peak square wave was connected to the output through a 10 pF capacitor. (Figure 31) The typical time for the output to recover to 1% of the applied pulse is 80 ns. To recover to 0.1% requires 860 ns. This rapid recovery is due to the wide bandwidth of the output stage and large total GBWP.

LMP2015, LMP2016

SNOSAX3B –DECEMBER 2007–REVISED JANUARY 2010

www.ti.com

NO EXTERNAL CAPACITORS REQUIRED

The LMP2015/LMP2016 do not need external capacitors. This eliminates the problems caused by capacitor leakage and dielectric absorption, which can cause delays of several seconds from turn-on until the amplifier's error has settled.

MORE BENEFITS

The LMP2015/LMP2016 offer the benefits mentioned above and more. These parts have rail-to-rail outputs and consume only 950 μA of supply current while providing excellent DC and AC electrical performance. In DC performance, the LMP2015/LMP2016 achieve 130 dB of CMRR, 120 dB of PSRR and 130 dB of open loop gain. In AC performance, the LMP2015/LMP2016 provide 3 MHz of gain bandwidth product and 4 V/ μs of slew rate.

HOW THE LMP2015/LMP2016 WORK

The LMP2015/LMP2016 use new, patented techniques to achieve the high DC accuracy traditionally associated with chopper-stabilized amplifiers without the major drawbacks produced by chopping. The LMP2015/LMP2016 continuously monitor the input offset and correct this error. The conventional chopping process produces many mixing products, both sums and differences, between the chopping frequency and the incoming signal frequency. This mixing causes a large amount of distortion, particularly when the signal frequency approaches the chopping frequency. Even without an incoming signal, the chopper harmonics mix with each other to produce even more trash. To explain this Figure 32 shows a plot, of the output of a typical (MAX432) chopper-stabilized op amp. This is the output when there is no incoming signal, just the amplifier in a gain of -10 with the input grounded. The chopper is operating at about 150 Hz; the rest is mixing products. Add an input signal and the noise gets much worse. Compare this plot with Figure 33 of the LMP2015/LMP2016. This data was taken under the exact same conditions. The auto-zero action is visible at about 30 kHz but note the absence of mixing products at other frequencies. As a result, the LMP2015/LMP2016 have very low distortion of 0.02% and very low mixing products.

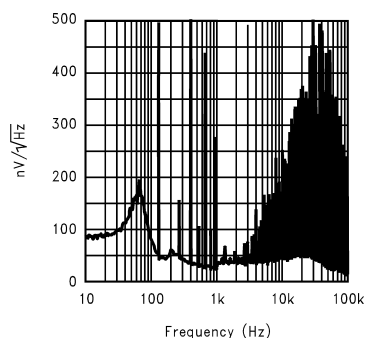


Figure 32. The Output of a Chopper Stabilized Op Amp (MAX432)

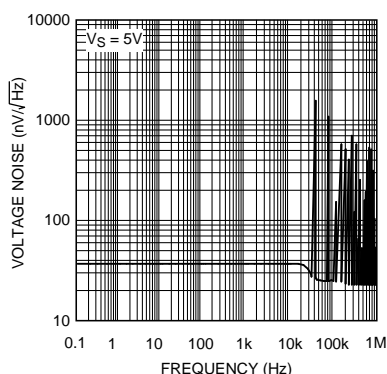


Figure 33. The Output of the LMP2015/LMP2016

INPUT CURRENTS

The LMP2015/LMP2016 input currents are different than standard bipolar or CMOS input currents in that it appears as a current flowing in one input and out the other. Under most operating conditions, these currents are in the picoamp level and will have little or no effect in most circuits. These currents tend to increase slightly when the common-mode voltage is near the minus supply (See the [Typical Performance Characteristics](#)). At high temperatures such as 85°C, the input currents become larger, 0.5 nA typical, and are both positive except when the V_{CM} is near V^- . If operation is expected at low common-mode voltages and high temperature, do not add resistance in series with the inputs to balance the impedances. Doing this can cause an increase in offset voltage. A small resistance such as 1 kΩ can provide some protection against very large transients or overloads, and will not increase the offset significantly.

PRECISION STRAIN GAUGE AMPLIFIER

This strain gauge amplifier ([Figure 34](#)) provides high gain (1006 or ~60 dB) with very low offset and drift. Using the resistors' tolerances as shown, the worst case CMRR will be greater than 108 dB. The CMRR is directly related to the resistor mismatch. The rejection of common-mode error, at the output, is independent of the differential gain, which is set by R3. The CMRR is further improved, if the resistor ratio matching is improved, by specifying tighter-tolerance resistors, or by trimming.

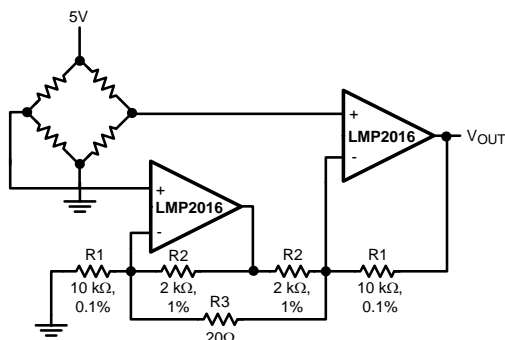


Figure 34. Precision Strain Gauge Amplifier

Extending Supply Voltages and Output Swing by Using a Composite Amplifier Configuration

In cases where substantially higher output swing is required with higher supply voltages, arrangements such as those shown in [Figure 35](#) and [Figure 36](#) can be used. These configurations utilize the excellent DC performance of the LMP2015 while allowing the superior voltage and frequency capabilities of the LM6171 to set the dynamic performance of the overall amplifier. For example, it is possible to achieve $\pm 12V$ output swing with 300 MHz of overall GBW ($A_V = 100$) while keeping the worst case output shift due to V_{OS} less than 4 mV. The LMP2015 output voltage is kept at about mid-point of its overall supply voltage, and its input common mode voltage range allows the V^- terminal to be grounded in one case ([Figure 35](#), inverting operation) and tied to a small non-critical negative bias in another ([Figure 36](#), non-inverting operation). Higher closed loop gains are also possible with a corresponding reduction in realizable bandwidth. [Table 1](#) shows some other closed loop gain possibilities along with the measured performance in each case.

LMP2015, LMP2016

SNOSAX3B –DECEMBER 2007–REVISED JANUARY 2010

www.ti.com

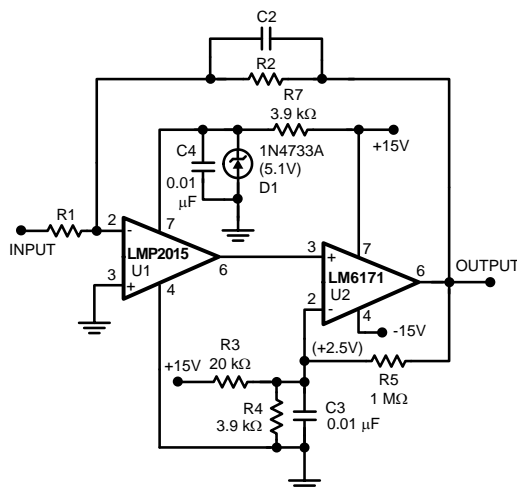


Figure 35. Composite Amplifier Configuration

Table 1. Composite Amplifier Measured Performance

| AV | R1 Ω | R2 Ω | C2 pF | BW MHz | SR (V/μs) | en p-p (mV _{pp}) |
|------|---------|---------|----------|-----------|--------------|-------------------------------|
| 50 | 200 | 10k | 8 | 3.3 | 178 | 37 |
| 100 | 100 | 10k | 10 | 2.5 | 174 | 70 |
| 100 | 1k | 100k | 0.67 | 3.1 | 170 | 70 |
| 500 | 200 | 100k | 1.75 | 1.4 | 96 | 250 |
| 1000 | 100 | 100k | 2.2 | 0.98 | 64 | 400 |

In terms of the measured output peak-to-peak noise, the following relationship holds between output noise voltage; e_n p-p, the closed-loop gain; A_V , and -3 dB bandwidth; BW:

$$\frac{e_{npp1}}{e_{npp2}} = \sqrt{\frac{BW1}{BW2}} \cdot \frac{A_{V1}}{A_{V2}} \tag{1}$$

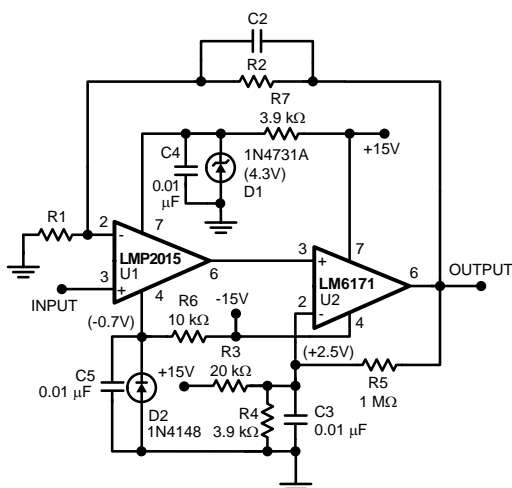


Figure 36. Composite Amplifier Configuration

It should be kept in mind that in order to minimize the output noise voltage for a given closed loop gain setting, one could minimize the overall bandwidth. As can be seen from Equation 1, the output noise has a square root relationship to the bandwidth.

In the case of the inverting configuration, it is also possible to increase the input impedance of the overall amplifier by raising the value of R1. This can be done without having to increase the feedback resistor, R2, to impractical values, by utilizing a "Tee" network as feedback. See the LMC6442 datasheet ([Application Information](#) section) for more details on this.

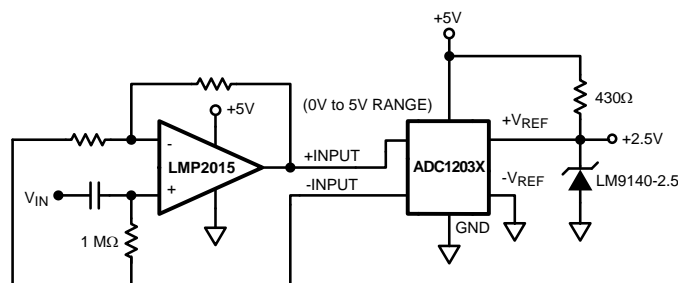


Figure 37. AC Coupled ADC Driver

LMP2015 AS AN ADC DRIVER

The LMP2015 is a great choice for an amplifier stage immediately before the input of an ADC (Analog-to-Digital Converter) as an ADC driver, whether AC or DC coupled. See [Figure 37](#) and [Figure 38](#). This is because of the following important characteristics:

- A)** Very low offset voltage and offset voltage drift over time and temperature allow a high closed loop gain setting without introducing any short term or long term errors. For example, when set to a closed loop gain of 100 as the analog input amplifier for a 12-bit A/D converter, the overall conversion error over full operation temperature and 30 year life of the part (operating at 50°C) would be less than 5 LSBs.
- B)** Fast large signal settling time to 0.01% of final value (1.4 μs) allows 12-bit accuracy at a sampling rate of 100 kHz or more.
- C)** No flicker (1/f) noise means unsurpassed data accuracy over any measurement period of time, no matter how long. Consider the following op amp performance, based on a typical low noise, high performance commercially-available device, for comparison:
 - Op amp flatband noise = 8 nV/√Hz
 - 1/f corner frequency = 100 Hz
 - A_V = 2000
 - Measurement time = 100 sec
 - Bandwidth = 2 Hz
 This example will result in about 2.2 mV_{PP} (1.9 LSB) of output noise contribution due to the op amp alone, compared to about 594 μV_{PP} (less than 0.5 LSB) when that op amp is replaced with the LMP2015 which has no 1/f contribution. If the measurement time is increased from 100 seconds to 1 hour, the improvement realized by using the LMP2015 would be a factor of about 4.8 times (2.86 mV_{PP} compared to 596 μV when LMP2015 is used). This is mainly because the LMP2015 accuracy is not compromised by increasing the observation time.
- D)** Copper leadframe construction minimizes any thermocouple effects which would degrade low level/high gain data conversion application accuracy (see discussion in [THE BENEFITS OF THE LMP2015/LMP2016's NO 1/f NOISE](#) section).
- E)** Rail-to-Rail output swing maximizes the ADC dynamic range in 5V single supply converter applications. [Figure 37](#) and [Figure 38](#) are typical block diagrams showing the LMP2015 used as an ADC driver.

LMP2015, LMP2016

SNOSAX3B –DECEMBER 2007–REVISED JANUARY 2010

www.ti.com

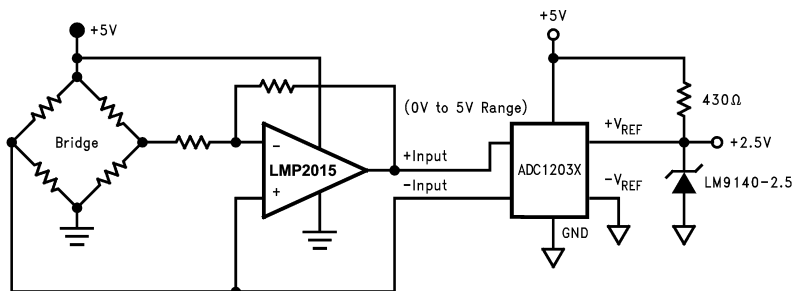


Figure 38. DC Coupled ADC Driver

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

| | |
|------------------------------|--|
| Audio | www.ti.com/audio |
| Amplifiers | amplifier.ti.com |
| Data Converters | dataconverter.ti.com |
| DLP® Products | www.dlp.com |
| DSP | dsp.ti.com |
| Clocks and Timers | www.ti.com/clocks |
| Interface | interface.ti.com |
| Logic | logic.ti.com |
| Power Mgmt | power.ti.com |
| Microcontrollers | microcontroller.ti.com |
| RFID | www.ti-rfid.com |
| OMAP Applications Processors | www.ti.com/omap |
| Wireless Connectivity | www.ti.com/wirelessconnectivity |

Applications

| | |
|-------------------------------|--|
| Automotive and Transportation | www.ti.com/automotive |
| Communications and Telecom | www.ti.com/communications |
| Computers and Peripherals | www.ti.com/computers |
| Consumer Electronics | www.ti.com/consumer-apps |
| Energy and Lighting | www.ti.com/energy |
| Industrial | www.ti.com/industrial |
| Medical | www.ti.com/medical |
| Security | www.ti.com/security |
| Space, Avionics and Defense | www.ti.com/space-avionics-defense |
| Video and Imaging | www.ti.com/video |

TI E2E Community

e2e.ti.com