

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF](#)
[122414](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	DESCRIPTION
A	02/06/00	UPDATE TITLE/ INSULATOR MATERIAL
B	07/19/07	UPDATE DRAWING FORMAT

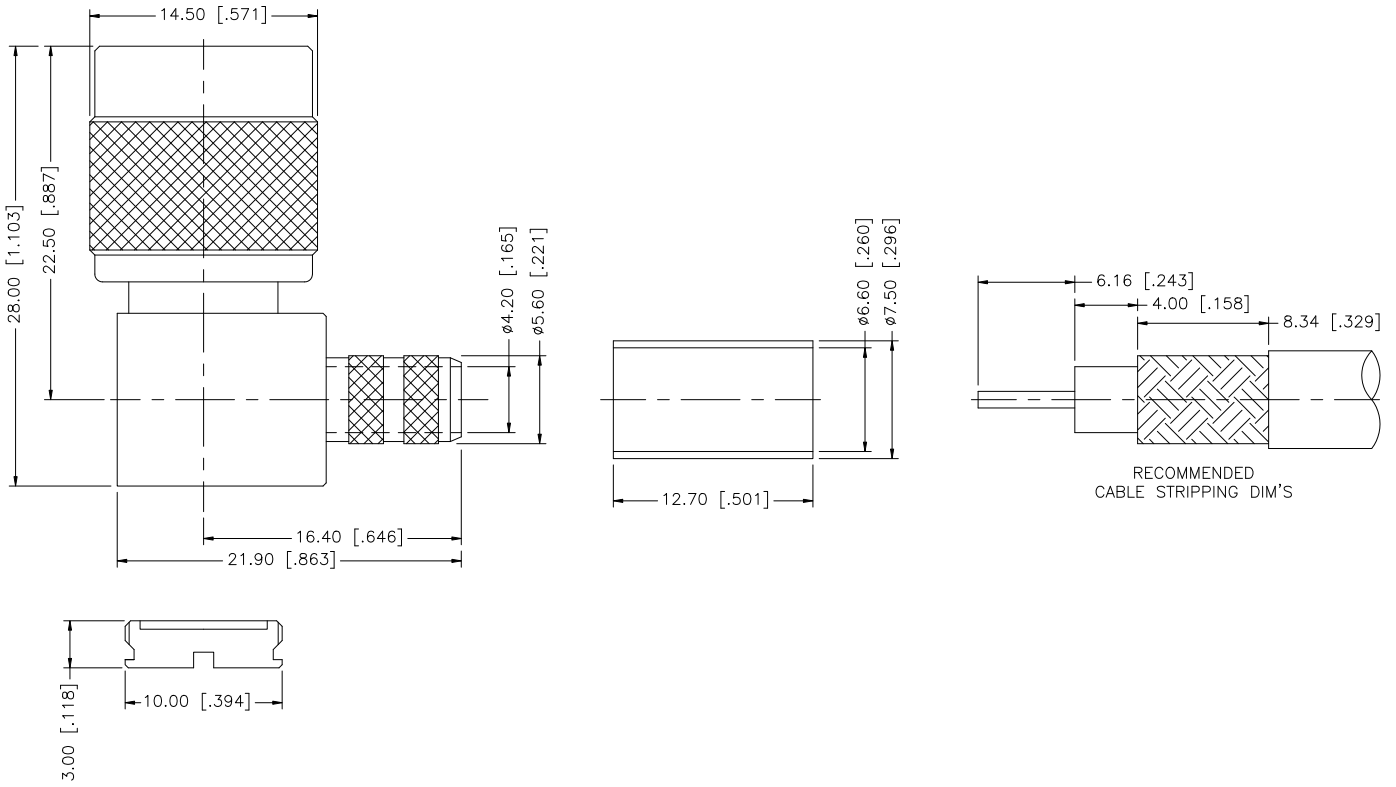

DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex			
8							PART DESCRIPTION TNC R/A CRIMP PLUG (FOR BELDEN RG-8/X TIMES LMR-240MA CABLE)			
7										
6							PART NO. 122414			
5	COVER	BRASS	NICKEL	1	DRAWN	G.R.S.				07/19/07
4	FERRULE	COPPER	NICKEL	1	CHECKED			DWG. NO. 122414.DWG		
3	CONTACT PIN	BRASS	GOLD	1	ISSUED					
2	INSULATOR	TEFLON	NATURAL	1	SHEET	1 OF 1		REV.	SIZE	SCALE
1	BODY	BRASS	NICKEL	1	CAD FILE	C:/122/122414.DWG		B	A	NA

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
 0.5 - 8mm ± 0.20mm
 8 - 30mm ± 0.40mm
 30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
 .020 - .315 = ± 0.007"
 .315 - 1.180 = ± 0.015"
 1.180 - 4.724 = ± 0.020"