

## **Excellent Integrated System Limited**

Stocking Distributor





Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF](#)  
[132298](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

REV.	DATE	DESCRIPTION
NC	D1/29/01	INITIAL RELEASE
A	D5/01/04	UPDATE DRAWING FORMAT

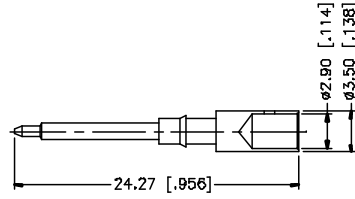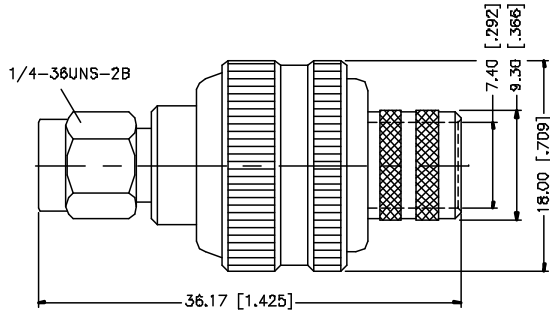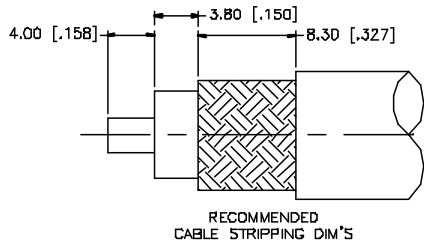

NOTES:

1. CRIMPED FERRULE  
HEX CRIMP SIZE .429"
2. CRIMPED CONTACT PIN,  
HEX CRIMP SIZE .118"

REV.	DATE	DESCRIPTION	QTY	APPROVALS	DATE	<h2 style="color: blue; margin: 0;">Amphenol Connex</h2>
8				DRAWN	G.R.S.	
7				CHECKED		<b>SMA CRIMP PLUG</b> <b>(FOR BELDEN 9913, 9914, LMR-400)</b>
6				ISSUED		
5				SHEET	1 OF 1	PART NO.
4	FERRULE	COPPER	GOLD	1		132298
3	CONTACT PIN	BRASS	GOLD	1		
2	INSULATOR	TEFLON	NATURAL	1		
1	HOUSING/BODY	BRASS	GOLD	1		
	DESCRIPTION	MATERIAL	FINISH	QTY	CAD FILE	DWG. NO.
					C:/132/132298.DWG	132298.DWG
				DD NOT SCALE DRAWING		REV. A SIZE A SCALE NA

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:  
 0.5 - 8mm ± 0.20mm  
 8 - 30mm ± 0.40mm  
 30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:  
 .020 - .315 = ± 0.007"  
 .315 - 1.180 = ± 0.015"  
 1.180 - 4.724 = ± 0.020"