

## Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[US Sensor](#)  
[ST10006B](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

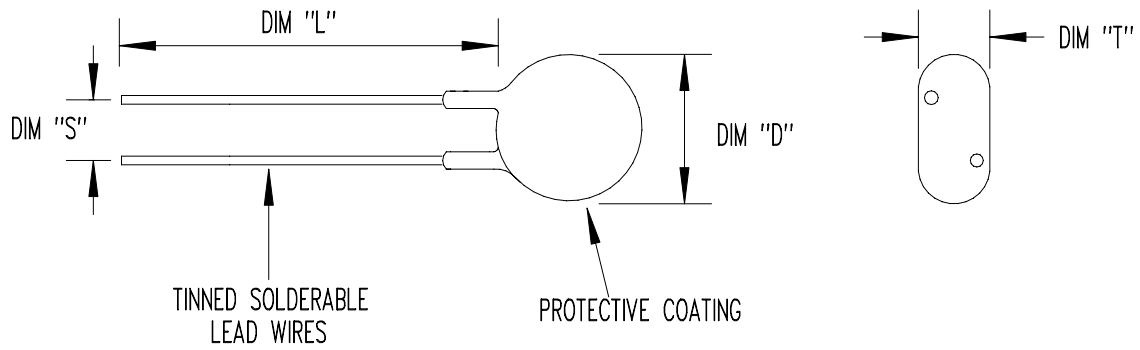

RESISTANCE @ +25°C = 10 Ω ± 20%  
 MAXIMUM STEADY STATE CURRENT = 6 AMPS  
 RESISTANCE @ MAXIMUM CURRENT = 0.150 Ω NOMINAL  
 DIM "D" = 1.175" MAXIMUM  
 DIM "T" = 0.350" MAXIMUM  
 DIM "L" = 0.700" MINIMUM  
 DIM "S" = 0.310" NOMINAL

LEAD WIRE GAUGE = 18 AWG OR 20 AWG

SEE MANUFACTURING SPECIFICATION (LAYER 1)

"D"	DIM "D" WAS 0.950" MAXIMUM	07/14/09	DD
"C"	DIM "D" WAS 0.610" MAXIMUM & DIM "L" WAS 1" MINIMUM	07/02/09	DD
"B"	DIM "D" WAS 0.600" MAXIMUM	11/22/05	DD
---	ISO RELEASE	04/30/03	DD
"A"	NO INFO		
REV	REVISION RECORD	DATE	APP

SCALE	NONE	<b>U.S. SENSOR CORP.</b> 1832 W. COLL INS AVE. ORANGE, CA. 92867 714-639-1000 www.ussensor.com INRUSH CURRENT LIMITER P/N ST10006B
DRAWN BY	T. SOMERVILLE	
DATE	09/01/93	
REV.	"D"	
LAYER	0 OF 2	