



## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Murata Electronics North America](#)  
[RF1172C](#)

For any questions, you can email us directly:


[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



RFM products are now Murata products.

**RF1172C**

**433.92 MHz  
SAW Filter**



**SM5050-8 Case  
5 x 5**

- **Ideal Front-End Filter for European Wireless Receivers**
- **Low-Loss, Coupled-Resonator Quartz Design**
- **Simple External Impedance Matching**
- **Complies with Directive 2002/95/EC (RoHS)**



The RF1172C is a low-loss, compact, and economical surface-acoustic-wave (SAW) filter designed to provide front-end selectivity in 433.92 MHz receivers. Receiver designs using this filter include superhet with 10.7 MHz or 500 kHz IF, direct conversion and superregen. Typical applications of these receivers are wireless remote-control and security devices operating in Europe under ETSI I-ETS 300 220.

This coupled-resonator filter (CRF) uses selective null placement to provide suppression, typically greater than 40 dB, of the LO and image spurious responses of superhet receivers with 10.7 MHz IF. Murata's advanced SAW design and fabrication technology is utilized to achieve high performance and very low loss with simple external impedance matching.

Characteristic	Sym	Notes	Minimum	Typical	Maximum	Units	
Center Frequency at 25°C Absolute Frequency	$f_c$	1, 2		433.92		MHz	
	$\Delta f_c$				±160	kHz	
Tolerance from 433.92 MHz							
Insertion Loss	IL	1		3.0	5.0	dB	
3 dB Bandwidth	BW <sub>3</sub>	1, 2	500	600	800	kHz	
Rejection		1	at $f_c - 21.4$ MHz (Image)	40	50	dB	
			at $f_c - 10.7$ MHz (LO)	30	40		
			Ultimate		80		
Temperature	Operating Case Temp.	$T_C$	3, 4	-40		+85	°C
	Turnover Temperature	$T_O$		15	25	35	°C
	Turnover Frequency	$f_O$			$f_c$		MHz
	Freq. Temp. Coefficient	FTC			0.032		ppm/°C <sup>2</sup>
Frequency Aging	Absolute Value during the First Year	fA	5		≤10	ppm/yr	
Impedance @ $f_c$	Input $Z_{IN} = R_{IN}    C_{IN}$	$Z_{IN}$	1	212 Ω    3.1 pF			
	Output $Z_{OUT} = R_{OUT}    C_{OUT}$	$Z_{OUT}$		212 Ω    3.1 pF			
Lid Symbolization (Y=year WW=week S=shift)	409 // YWWS						
Standard Reel Quantity	Reel Size 7 Inch	9	500 Pieces/Reel				
	Reel Size 13 Inch		3000 Pieces/Reel				



**CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.**



**NOTES:**

1. Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture which is connected to a 50 W test system with VSWR ≤ 1.2:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency,  $f_c$ . Note that insertion loss and bandwidth and passband shape are dependent on the impedance matching component values and quality.
2. The frequency  $f_c$  is defined as the midpoint between the 3dB frequencies.
3. Where noted specifications apply over the entire specified operating temperature range.
4. The turnover temperature,  $T_O$ , is the temperature of maximum (or turnover) frequency,  $f_O$ . The nominal frequency at any case temperature,  $T_C$ , may be calculated from:  
 $f = f_O [1 - FTC (T_O - T_C)^2]$
5. Frequency aging is the change in  $f_c$  with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing significantly in subsequent years.
6. The design, manufacturing process, and specifications of this device are subject to change.
7. One or more of the following U.S. Patents apply: 4,54,488, 4,616,197, and others pending.

Rating	Value	Units
Input Power Level	10	dBm
DC Voltage	12	VDC
Storage Temperature	-40 to +85	°C
Soldering Temperature	(10 seconds / 5 cycles max.)	260 °C


**Typical Filter Response**

Typical filter responses are shown below. The actual response is dependent on external impedance matching and circuit layout.

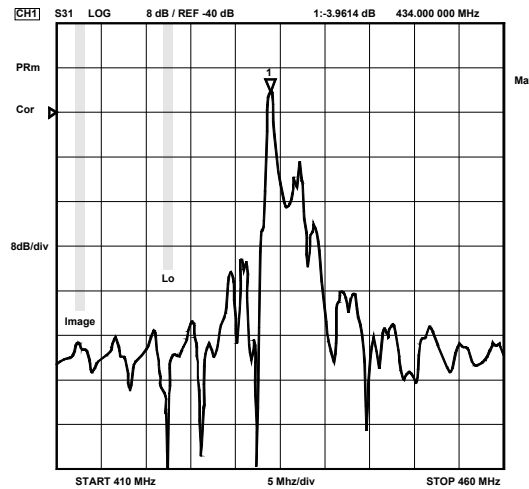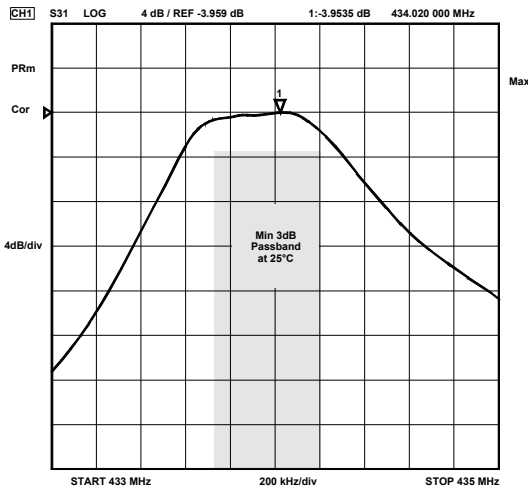


**Electrical Connections**

Pin	Connection
1	Input Ground
2	Input
3	to be Grounded
4	Case Ground
5	Output
6	Output Ground
7	to be Grounded
8	Case Ground

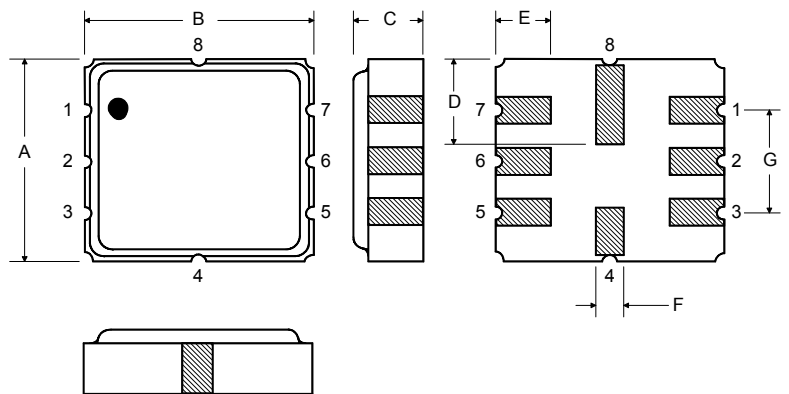

**Matching Circuit to 50Ω**

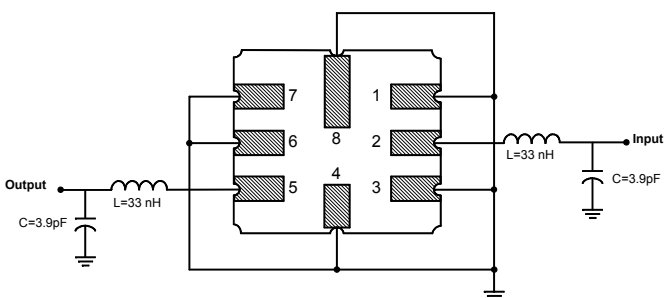

**Case Dimensions**

Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	4.8	5.0	5.2	0.189	0.197	0.205
B	4.8	5.0	5.2	0.189	0.197	0.205
C			1.7			0.067
D		2.08			0.082	
E		1.17			0.046	
F		0.64			0.025	
G	2.39	2.54	2.69	0.094	0.100	0.106