

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[NorComp](#)
[27633602RP2](#)

For any questions, you can email us directly:
sales@integrated-circuit.com


DESCRIPTION: 2mm HEADER STRIP STRAIGHT

MATERIALS:

HOUSING: NYLON 6T- UL 94V-0
 COLOR: BLACK
 CONTACTS: COPPER ALLOY
 PLATING: GOLD FLASH ENTIRE CONTACT
 ROHS COMPLIANT


CURRENT RATING: 1 AMP
 INSULATOR RESISTANCE: 5000 MEGOHMS MIN.
 DIELECTRIC WITHSTANDING: 500V AC
 OPERATING TEMP: -40°C TO +105°C
 MAX PROCESSING TEMP: 260°C FOR 10 SECONDS

"L" = NO. OF PINS/ROW X .079 - .079

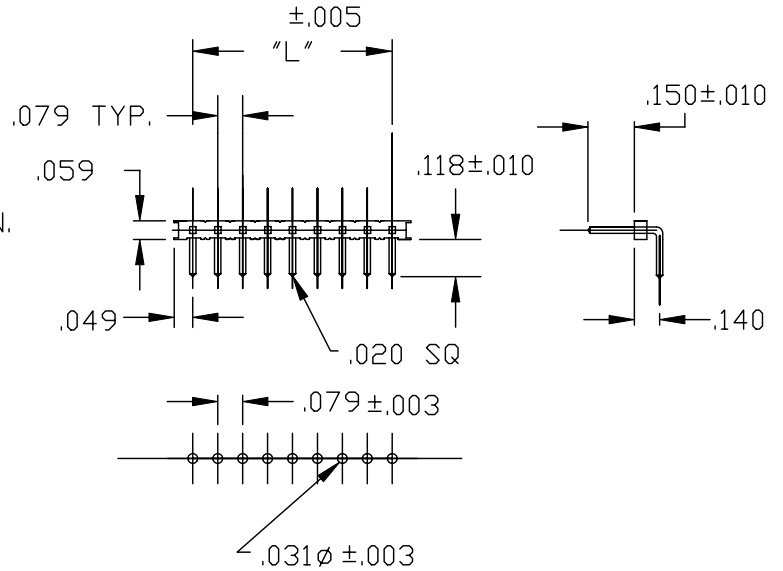

2763 YY 02RP2

SERIES _____
 2763 = SINGLE ROW
 POSITIONS _____
 SINGLE - INCRMENTS OF 1
 (01 TO 36)
 TYPE _____
 02 = RIGHT ANGLE
 PLATING _____
 P2 = GOLD FLASH

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: PAM JENKINS	DATE: 1-27-06
			CHECKED:	DATE:
<h1>NorComp</h1>	SCALE:	SHEET 1	OF 1	REV 2
	DWG NO. 2763YY02RP2			