

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[NorComp](#)
[27647202RP2](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

DESCRIPTION: 2mm CENTER RIGHT ANGLE HEADER





20 PIN SHOWN

ELECTRICAL:

CURRENT RATING: 1 AMPS
 INSULATOR RESISTANCE: 5,000 MegOhms Min.
 DIELECTRIC WITHSTANDING: 500V AC
 OPERATING TEMPERATURE: -40° ~ +105° C
 MAX. PROCESS TEMPERATURE: 260°C FOR 10SEC.

MATERIAL:

CONTACT: COPPER ALLOY
 INSULATION: NYLON-6T, UL 94V-0
 PLATING: GOLD FLASH ENTIRE CONTACT

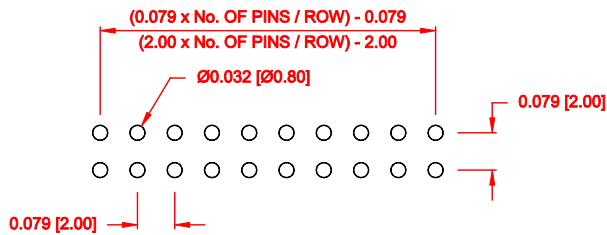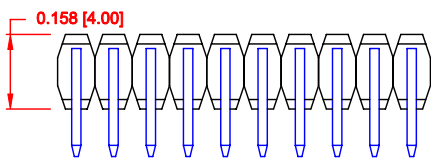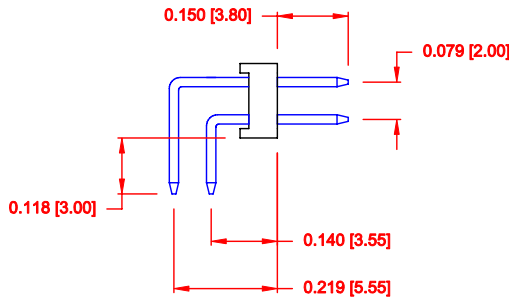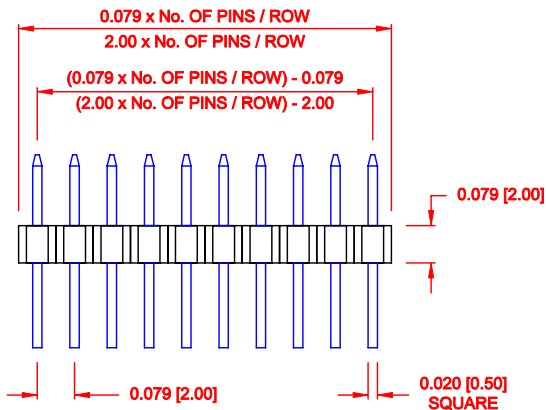

RECOMMENDED P.C. BOARD LAYOUT
 (ALL TOL. = 0.002)

2764 YY 02 R P2

SERIES 2.00mm
 POSITIONS 2 THRU 72
 IN INCRUMENTS OF 2
 TERMINATION 02 = RIGHT ANGLE
 RoHS COMPLIANT (HIGH TEMP. PROCESS)
 PACKAGING TAPE & REEL

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: C. SMITH DATE: 07-16-08
			CHECKED: _____ DATE: _____
NorComp	SCALE: 3 : 1	SHEET 1 OF 1	REV 3
	DWG NO. 2764YY02RP2		