

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Murata Electronics North America RF3319D

For any questions, you can email us directly: sales@integrated-circuit.com



Distributor of Murata Electronics North America: Excellent Integrated System Limited Datasheet of RF3319D - SAW FILTER 868.95MHZ SM3838-8


Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com



RFM products are now Murata products.

RF3319D

868.95 MHz **SAW Filter**



Ideal Front-End Filter for European Wireless Receivers

- · Low-Loss, Coupled-Resonator Quartz Design
- · Simple External Impedance Matching
- Complies with Directive 2002/95/EC (RoHS)

The RF3319D is a low-loss, compact, and economical surface-acoustic-wave (SAW) filter designed to provide front-end selectivity in 868.95 MHz receivers. Receiver designs using this filter include superhet with 10.7 MHz or 500 kHz IF, direct conversion and superregen. Typical applications of these receivers are wireless remote-control and security devices operating in Europe under ETSI I-ETS 300 220, in Germany under FTZ 17 TR 2100, in the United Kingdom under DTI MPT 1340 (for automotive only), in France under PTT Specifications ST/PAA/TPA/AGH/1542, and in Scandinavia.

This coupled-resonator filter (CRF) uses selective null placement to provide suppression, typically greater than 40 dB, of the LO and image spurious responses of superhet receivers with 10.7 MHz IF. Murata's advanced SAW design and fabrication technology is utilized to achieve high performance and very low loss with simple external impedance matching (not included).

Characteristic		Sym	Notes	Minimum	Typical	Maximum	Units
Center Frequency @ 25°C	Absolute Frequency	f _C	1, 2, 3		868.95		MHz
Insertion Loss		IL	1		2.2	4.0	dB
3 dB Bandwidth		BW ₃	1, 3	500	650	900	kHz
Attenuation: (relative to ILmin)	10 - 700 MHz			50	55		dB
	700 - 830 MHz		1, 3	40	45		
	830 - 850 MHz			35	40		
	850 - 865 MHz			20	24		
	871 - 878 MHz			21	30		
	878 - 883 MHz			15	20		
	883 - 900 MHz			28	35		
	900 - 1000 MHz			40	45		
Temperature	Freq. Temp. Coefficient	FTC	3, 4		0.032		ppm/ °C ²
Frequency Aging	Absolute Value during the First Year	fA	5		<±10		ppm/yr
l	Input Z _{IN} = R _{IN} /C _{IN}	Z _{IN}		28.8 Ω // 1.93pF			
Impedance @ f _C	Output Z _{OUT} = R _{OUT} /C _{OUT}	Z _{OUT}	1	26.9 Ω // 2.2pF			
Lid Symbolization (in addition	n to Lot and/or Date Codes)			668 // \	/WWS		
Standard Reel Quantity 7 Inch Reel Standard Reel Quantity 13 Inch Reel			9	500 Pieces/Reel			
			9	3000 Pieces/Reel			

CAUTION: Electrostatic Sensitive Device. Observe precautions for handling. NOTES:

Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture which is connected to a 50 Ω test system with VSWR ≤ 1.2:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency, fc. Note that insertion loss and bandwidth are dependent on the impedance matching component values and quality.

2 The frequency f_c is defined as the midpoint between the 3dB frequencies.

- Where noted, specifications apply over the entire specified operating temperature range of -40 to 90° C. The turnover temperature, T_{O} , is the temperature of maximum (or turnover) frequency, f_{O} . The nominal frequency at any case temperature, T_{C} , may be calculated from: $f = f_0 [1 - FTC (T_0 - T_c)^2].$
- Frequency aging is the change in fc with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing significantly in subsequent years.

 The design, manufacturing process, and specifications of this device are subject to change without notice.

 One or more of the following U.S. Patents apply: 4,54,488, 4,616,197, and others pending.

 All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.

 Tape and Reel Standard for ANSI / EIA 481. 5.


Datasheet of RF3319D - SAW FILTER 868.95MHZ SM3838-8

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com


Rating		Value	Units
Input Power Level		10	dBm
DC Voltage		12	VDC
Storage Temperature		-40 to +125	°C
Operable Temperature Range		-40 to +125	°C
Soldering Temperature	(10 seconds / 5 cycles max.)	260	°C

Electrical Connections

Pin	Connection		
1	Input Ground		
2	Input		
3	N/C		
4	Case Ground		
5	Output Ground		
6	Output		
7	Case Ground		
8	Case Ground		

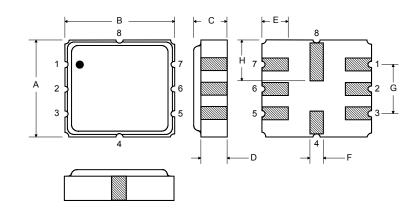

Matching Circuit to 50Ω

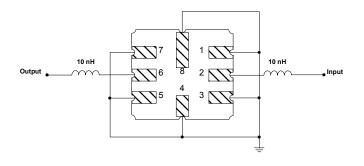

Case Dimensions

Dimension	mm			Inches			
	Min	Nom	Max	Min	Nom	Max	
Α	3.6	3.8	4.0	0.14	0.15	0.16	
В	3.6	3.8	4.0	0.14	0.15	0.16	
С	1.00	1.20	1.40	0.04	0.05	0.055	
D	0.95	1.10	1.25	0.033	0.043	0.05	
E	0.90	1.0	1.10	0.035	0.04	0.043	
F	0.50	0.6	0.70	0.020	0.024	0.028	
G	2.39	2.54	2.69	0.090	0.100	0.110	
Н	1.40	1.75	2.05	0.055	0.069	0.080	

OPTIONAL

Electrical Connections

Pin	Connection
1	Input
2	Input Ground
3	N/C
4	Case Ground
5	Output
6	Output Ground
7	Case Ground
8	Case Ground

Matching Circuit to 50Ω

