

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Maxim Integrated](#)  
[MAX2042AETP+T](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### General Description

The MAX2042A single, high-linearity upconversion/downconversion mixer provides up to +33dBm input IP3, 7.25dB noise figure, and 7.2dB conversion loss for 1600MHz to 3900MHz GSM/EDGE, CDMA, TD-SCDMA, WCDMA, LTE, TD-LTE, WiMAX™, and MMDS wireless infrastructure applications. With an ultra-wide 1300MHz to 4000MHz LO frequency range, the IC can be used in either low-side or high-side LO injection architectures for virtually all 1.7GHz to 3.5GHz applications (for a 2.5GHz variant tuned specifically for low-side LO injection, refer to the MAX2042).

In addition to offering excellent linearity and noise performance, the IC also yields a high level of component integration. This device includes a double-balanced passive mixer core, an LO buffer, and on-chip baluns that allow for single-ended RF and LO inputs. The IC requires a nominal LO drive of 0dBm, and supply current is typically 140mA at  $V_{CC} = 5.0V$  or 122mA at  $V_{CC} = 3.3V$ .

The MAX2042A is pin compatible with the MAX2042 2000MHz to 3000MHz mixer. The MAX2042A is also pin similar with the MAX2029/MAX2031/MAX2033 650MHz to 1550MHz mixers, the MAX2039/MAX2041 1700MHz to 3000MHz mixers, and the MAX2044 2300MHz to 4000MHz mixer, making the entire family of upconverters/downconverters ideal for applications where a common PCB layout is used for multiple frequency bands.

The MAX2042A is available in a compact, 20-pin TQFN package (5mm x 5mm) with an exposed pad. Electrical performance is guaranteed over the extended  $T_C = -40^\circ C$  to  $+85^\circ C$  temperature range.

### Applications

- 1.8GHz/1.9GHz GSM/EDGE/CDMA Base Stations
- 2.1GHz WCDMA/LTE Base Stations
- 2.3GHz TD-SCDMA/TD-LTE Base Stations
- 2.5GHz WiMAX and LTE Base Stations
- 2.7GHz MMDS Base Stations
- 3.5GHz WiMAX and LTE Base Stations
- Fixed Broadband Wireless Access
- Wireless Local Loop
- Private Mobile Radios
- Military Systems

### Benefits and Features

- ◆ **Wide-Band Coverage**
  - ◇ 1600MHz to 3900MHz RF Frequency Range
  - ◇ 1300MHz to 4000MHz LO Frequency Range
  - ◇ 50MHz to 500MHz IF Frequency Range
- ◆ **7.2dB Conversion Loss**
- ◆ **7.25dB Noise Figure**
- ◆ **High Linearity**
  - ◇ +33dBm Input IP3
  - ◇ +21.7dBm Input 1dB Compression Point
  - ◇ 72dBc Typical 2LO - 2RF Spurious Rejection at  $P_{RF} = -10dBm$
- ◆ **Simple PCB Layout**
  - ◇ Integrated LO Buffer
  - ◇ Integrated LO and RF Baluns for Single-Ended Inputs
- ◆ **Low -6dBm to +3dBm LO Drive**
- ◆ **Pin Compatible with the MAX2042 2000MHz to 3000MHz Mixer**
- ◆ **Pin-Similar with the MAX2029/MAX2031/MAX2033 650MHz to 1550MHz Mixers, MAX2039/MAX2041 1700MHz to 3000MHz Mixers, and MAX2044 2300MHz to 4000MHz Mixer**
- ◆ **Single +5.0V or +3.3V Supply**
- ◆ **External Current-Setting Resistor Provides Option for Operating Device in Reduced-Power/Reduced-Performance Mode**

[Ordering Information](#) appears at end of data sheet.

For related parts and recommended products to use with this part, refer to [www.maxim-ic.com/MAX2042A.related](http://www.maxim-ic.com/MAX2042A.related).

WiMAX is a trademark of WiMAX Forum.



## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### TABLE OF CONTENTS

|                                                                                                                                |    |
|--------------------------------------------------------------------------------------------------------------------------------|----|
| Absolute Maximum Ratings . . . . .                                                                                             | 4  |
| Package Thermal Characteristics . . . . .                                                                                      | 4  |
| 5.0V Supply DC Electrical Characteristics . . . . .                                                                            | 4  |
| 3.3V Supply DC Electrical Characteristics . . . . .                                                                            | 4  |
| Recommended AC operating conditions . . . . .                                                                                  | 5  |
| 5.0V Supply, RF = 2000MHz to 2900MHz, HIGH-SIDE LO INJECTION AC ELECTRICAL CHARACTERISTICS (DOWNCONVERTER OPERATION) . . . . . | 5  |
| 3.3V Supply, RF = 2000MHz to 2900MHz, HIGH-SIDE LO INJECTION AC ELECTRICAL CHARACTERISTICS (DOWNCONVERTER OPERATION) . . . . . | 7  |
| 5.0V Supply, RF = 3100MHz to 3900MHz, LOW-SIDE LO INJECTION AC ELECTRICAL CHARACTERISTICS (DOWNCONVERTER OPERATION) . . . . .  | 8  |
| 5.0V Supply, RF = 3100MHz to 3900MHz, HIGH-SIDE LO INJECTION AC ELECTRICAL CHARACTERISTICS (DOWNCONVERTER OPERATION) . . . . . | 9  |
| 5.0V Supply, RF = 1650MHz to 2250MHz, HIGH-SIDE LO INJECTION AC ELECTRICAL CHARACTERISTICS (DOWNCONVERTER OPERATION) . . . . . | 10 |
| 5.0V Supply, RF = 1650MHz to 2250MHz, LOW-SIDE LO INJECTION AC ELECTRICAL CHARACTERISTICS (DOWNCONVERTER OPERATION) . . . . .  | 11 |
| 5.0V Supply, RF = 2000MHz to 2900MHz, HIGH-SIDE LO INJECTION AC ELECTRICAL CHARACTERISTICS (UPCONVERTER OPERATION) . . . . .   | 12 |
| 3.3V Supply, RF = 2000MHz to 2900MHz, HIGH-SIDE LO INJECTION AC ELECTRICAL CHARACTERISTICS (UPCONVERTER OPERATION) . . . . .   | 13 |
| Typical Operating Characteristics . . . . .                                                                                    | 14 |
| Pin Configuration . . . . .                                                                                                    | 46 |
| Pin Description . . . . .                                                                                                      | 46 |
| Functional Diagram . . . . .                                                                                                   | 47 |
| Detailed Description . . . . .                                                                                                 | 47 |
| RF Input and Balun . . . . .                                                                                                   | 47 |
| LO Inputs, Buffer, and Balun . . . . .                                                                                         | 47 |
| High-Linearity Mixer . . . . .                                                                                                 | 47 |
| Differential IF Ports . . . . .                                                                                                | 47 |
| Applications Information . . . . .                                                                                             | 48 |
| Input and Output Matching . . . . .                                                                                            | 48 |
| Reduced-Power Mode . . . . .                                                                                                   | 48 |
| Layout Considerations . . . . .                                                                                                | 48 |
| Power-Supply Bypassing . . . . .                                                                                               | 48 |
| Exposed Pad RF/Thermal Considerations . . . . .                                                                                | 48 |

## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

---

### TABLE OF CONTENTS (continued)

---

|                                       |    |
|---------------------------------------|----|
| Typical Application Circuit . . . . . | 50 |
| Ordering Information . . . . .        | 51 |
| Chip Information . . . . .            | 51 |
| Package Information . . . . .         | 51 |
| Revision History . . . . .            | 52 |

---

### LIST OF TABLES

---

|                                                        |    |
|--------------------------------------------------------|----|
| Table 1. Component Values—Downconverter Mode . . . . . | 49 |
| Table 2. Component Values—Upconverter Mode . . . . .   | 49 |

## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### ABSOLUTE MAXIMUM RATINGS

|                                                                       |                              |                                                |                 |
|-----------------------------------------------------------------------|------------------------------|------------------------------------------------|-----------------|
| $V_{CC}$ to GND.....                                                  | -0.3V to +5.5V               | Operating Case Temperature Range (Note 1)..... | -40°C to +85°C  |
| IF+, IF-, LOBIAS to GND .....                                         | -0.3V to ( $V_{CC} + 0.3V$ ) | Continuous Power Dissipation (Note 2) .....    | 5.0W            |
| RF, LO Input Power.....                                               | +20dBm                       | Junction Temperature .....                     | +150°C          |
| IF Input Power (50 $\Omega$ source).....                              | +18dBm                       | Storage Temperature Range.....                 | -65°C to +150°C |
| RF, LO Current (RF and LO are DC shorted to GND through a balun)..... | 50mA                         | Lead Temperature (soldering 10s) .....         | +300°C          |
|                                                                       |                              | Soldering Temperature (reflow) .....           | +260°C          |

**Note 1:**  $T_C$  is the temperature on the exposed pad of the package.  $T_A$  is the ambient temperature of the device and PCB.

**Note 2:** Based on junction temperature  $T_J = T_C + (\theta_{JC} \times V_{CC} \times I_{CC})$ . This formula can be used when the temperature of the exposed pad is known while the device is soldered down to a PCB. See the [Applications Information](#) section for details. The junction temperature must not exceed +150°C.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### PACKAGE THERMAL CHARACTERISTICS

TQFN

|                                                     |                                                     |
|-----------------------------------------------------|-----------------------------------------------------|
| Junction-to-Ambient                                 | Junction-to-Case                                    |
| Thermal Resistance $\theta_{JA}$ (Notes 3, 4) ..... | Thermal Resistance $\theta_{JC}$ (Notes 2, 4) ..... |
| +38°C/W                                             | +13°C/W                                             |

**Note 3:** Junction temperature  $T_J = T_A + (\theta_{JA} \times V_{CC} \times I_{CC})$ . This formula can be used when the ambient temperature of the PCB is known. The junction temperature must not exceed +150°C.

**Note 4:** Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to [www.maxim-ic.com/thermal-tutorial](http://www.maxim-ic.com/thermal-tutorial).

### 5.0V SUPPLY DC ELECTRICAL CHARACTERISTICS

([Typical Application Circuit](#),  $V_{CC} = 4.75V$  to  $5.25V$ , no input AC signals.  $T_C = -40^\circ C$  to  $+85^\circ C$ , unless otherwise noted. Typical values are at  $V_{CC} = 5.0V$ ,  $T_C = +25^\circ C$ .)

| PARAMETER      | SYMBOL   | CONDITIONS | MIN  | TYP | MAX  | UNITS |
|----------------|----------|------------|------|-----|------|-------|
| Supply Voltage | $V_{CC}$ |            | 4.75 | 5   | 5.25 | V     |
| Supply Current | $I_{CC}$ |            |      | 140 | 162  | mA    |

### 3.3V SUPPLY DC ELECTRICAL CHARACTERISTICS

([Typical Application Circuit](#),  $V_{CC} = 3.0V$  to  $3.6V$ , no input AC applied.  $T_C = -40^\circ C$  to  $+85^\circ C$ , unless otherwise noted. Typical values are at  $V_{CC} = 3.3V$ ,  $T_C = +25^\circ C$ .)

| PARAMETER      | SYMBOL   | CONDITIONS | MIN | TYP | MAX | UNITS |
|----------------|----------|------------|-----|-----|-----|-------|
| Supply Voltage | $V_{CC}$ |            | 3.0 | 3.3 | 3.6 | V     |
| Supply Current | $I_{CC}$ |            |     | 122 |     | mA    |

## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### RECOMMENDED AC OPERATING CONDITIONS

| PARAMETER                                | SYMBOL    | CONDITIONS                                                                                                                                                        | MIN  | TYP | MAX  | UNITS |
|------------------------------------------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-----|------|-------|
| RF Frequency Range Without Tuning        | $f_{RF1}$ | <i>Typical Application Circuit</i> with $C1 = 8.2\text{pF}$ (Table 1) (Notes 5, 6)                                                                                | 2000 |     | 2900 | MHz   |
| RF Frequency Range With Low-Band Tuning  | $f_{RF2}$ | <i>Typical Application Circuit</i> with $C1 = 1.8\text{pF}$ , $L1 = 12\text{nH}$ (Table 1) (Notes 5, 6)                                                           | 1600 |     | 2000 | MHz   |
| RF Frequency Range With High-Band Tuning | $f_{RF3}$ | <i>Typical Application Circuit</i> with $C1 = 1.5\text{pF}$ (Table 1) (Notes 5, 6)                                                                                | 3000 |     | 3900 | MHz   |
| LO Frequency                             | $f_{LO}$  | (Note 5, 6)                                                                                                                                                       | 1300 |     | 4000 | MHz   |
| IF Frequency                             | $f_{IF}$  | Using M/A-Com MABACT0069 1:1 transformer as defined in the <i>Typical Application Circuit</i> , IF matching components affect the IF frequency range (Notes 5, 6) | 50   |     | 500  | MHz   |
| LO Drive                                 | $P_{LO}$  |                                                                                                                                                                   | -6   | 0   | +3   | dBm   |

### 5.0V Supply, RF = 2000MHz to 2900MHz, HIGH-SIDE LO INJECTION AC ELECTRICAL CHARACTERISTICS (DOWNCONVERTER OPERATION)

(*Typical Application Circuit* with tuning elements outlined in [Table 1](#),  $V_{CC} = 4.75\text{V}$  to  $5.25\text{V}$ , RF and LO ports are driven from  $50\Omega$  sources,  $P_{LO} = -6\text{dBm}$  to  $+3\text{dBm}$ ,  $P_{RF} = 0\text{dBm}$ ,  $f_{RF} = 2000\text{MHz}$  to  $2900\text{MHz}$ ,  $f_{LO} = 2300\text{MHz}$  to  $3200\text{MHz}$ ,  $f_{IF} = 300\text{MHz}$ ,  $f_{RF} < f_{LO}$ ,  $T_C = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ . Typical values are for  $T_C = +25^\circ\text{C}$ ,  $V_{CC} = 5.0\text{V}$ ,  $P_{LO} = 0\text{dBm}$ ,  $f_{RF} = 2600\text{MHz}$ ,  $f_{LO} = 2900\text{MHz}$ ,  $f_{IF} = 300\text{MHz}$ .) (Note 7)

| PARAMETER                               | SYMBOL                 | CONDITIONS                                                                                                                                    | MIN | TYP        | MAX | UNITS                |
|-----------------------------------------|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-----|------------|-----|----------------------|
| Small-Signal Conversion Loss            | $L_C$                  | $f_{RF} = 2600\text{MHz}$ , $f_{LO} = 2900\text{MHz}$                                                                                         |     | 7.2        |     |                      |
|                                         |                        | $f_{RF} = 2900\text{MHz}$ , $f_{LO} = 3200\text{MHz}$ (Note 8)                                                                                |     | 7.8        |     |                      |
| Loss Variation vs. Frequency            | $\Delta L_C$           | $f_{RF} = 2010\text{MHz}$ to $2025\text{MHz}$                                                                                                 |     | $\pm 0.05$ |     | dB                   |
|                                         |                        | $f_{RF} = 2305\text{MHz}$ to $2360\text{MHz}$                                                                                                 |     | $\pm 0.05$ |     | dB                   |
|                                         |                        | $f_{RF} = 2500\text{MHz}$ to $2570\text{MHz}$                                                                                                 |     | $\pm 0.05$ |     | dB                   |
|                                         |                        | $f_{RF} = 2570\text{MHz}$ to $2620\text{MHz}$                                                                                                 |     | $\pm 0.05$ |     | dB                   |
|                                         |                        | $f_{RF} = 2500\text{MHz}$ to $2690\text{MHz}$                                                                                                 |     | $\pm 0.13$ |     | dB                   |
|                                         |                        | $f_{RF} = 2700\text{MHz}$ to $2900\text{MHz}$                                                                                                 |     | $\pm 0.02$ |     | dB                   |
| Conversion Loss Temperature Coefficient | $TC_{CL}$              | $T_C = -40^\circ\text{C}$ to $+85^\circ\text{C}$                                                                                              |     | 0.007      |     | dB/ $^\circ\text{C}$ |
| Single Sideband Noise Figure            | $NF_{SSB}$             | No blockers present                                                                                                                           |     | 7.25       |     | dB                   |
| Noise Figure Temperature Coefficient    | $TC_{NF}$              | $f_{RF} = 2600\text{MHz}$ , single sideband, no blockers present, $T_C = -40^\circ\text{C}$ to $+85^\circ\text{C}$                            |     | 0.022      |     | dB/ $^\circ\text{C}$ |
| Noise Figure Under Blocking             | $NF_{\text{Blocking}}$ | +8dBm blocker tone applied to RF port, $f_{RF} = 2600\text{MHz}$ , $f_{LO} = 2900\text{MHz}$ , $f_{\text{BLOCKER}} = 2400\text{MHz}$ (Note 9) |     | 18         |     | dB                   |

## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### 5.0V Supply, RF = 2000MHz to 2900MHz, HIGH-SIDE LO INJECTION AC ELECTRICAL CHARACTERISTICS (DOWNCONVERTER OPERATION) (continued)

(*Typical Application Circuit* with tuning elements outlined in [Table 1](#),  $V_{CC} = 4.75V$  to  $5.25V$ , RF and LO ports are driven from  $50\Omega$  sources,  $P_{LO} = -6dBm$  to  $+3dBm$ ,  $P_{RF} = 0dBm$ ,  $f_{RF} = 2000MHz$  to  $2900MHz$ ,  $f_{LO} = 2300MHz$  to  $3200MHz$ ,  $f_{IF} = 300MHz$ ,  $f_{RF} < f_{LO}$ ,  $T_C = -40^\circ C$  to  $+85^\circ C$ . Typical values are for  $T_C = +25^\circ C$ ,  $V_{CC} = 5.0V$ ,  $P_{LO} = 0dBm$ ,  $f_{RF} = 2600MHz$ ,  $f_{LO} = 2900MHz$ ,  $f_{IF} = 300MHz$ .) (Note 7)

| PARAMETER                         | SYMBOL       | CONDITIONS                                                                                                                                                                          |                   | MIN | TYP       | MAX | UNITS    |
|-----------------------------------|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-----|-----------|-----|----------|
| Input 1dB Compression Point       | $IP_{1dB}$   | (Note 10)                                                                                                                                                                           |                   |     | 21.7      |     | dBm      |
| Third-Order Input Intercept Point | $IIP3$       | $f_{RF1} - f_{RF2} = 1MHz$ , $P_{RF1} = P_{RF2} = 0dBm$<br>(Note 8)                                                                                                                 |                   |     | 33        |     | dBm      |
| IIP3 Variation with $T_C$         |              | $f_{RF1} - f_{RF2} = 1MHz$ , $P_{RF1} = P_{RF2} = 0dBm$ ,<br>$T_C = -40^\circ C$ to $+85^\circ C$                                                                                   |                   |     | $\pm 0.3$ |     | dB       |
| 2LO - 2RF Spur Rejection          | $2 \times 2$ | $f_{RF} = 2600MHz$ ,<br>$f_{LO} = 2900MHz$ ,<br>$f_{SPUR} = 2750MHz$                                                                                                                | $P_{RF} = -10dBm$ |     | 72        |     | dBc      |
|                                   |              |                                                                                                                                                                                     | $P_{RF} = 0dBm$   |     | 62        |     |          |
| 3LO - 3RF Spur Rejection          | $3 \times 3$ | $f_{RF} = 2600MHz$ ,<br>$f_{LO} = 2900MHz$ ,<br>$f_{SPUR} = 2800MHz$                                                                                                                | $P_{RF} = -10dBm$ |     | 91        |     | dBc      |
|                                   |              |                                                                                                                                                                                     | $P_{RF} = 0dBm$   |     | 71        |     |          |
| RF Input Return Loss              | $RL_{RF}$    | LO on and IF terminated into a matched impedance                                                                                                                                    |                   |     | 20        |     | dB       |
| LO Input Return Loss              | $RL_{LO}$    | RF and IF terminated into a matched impedance                                                                                                                                       |                   |     | 19        |     | dB       |
| IF Output Impedance               | $Z_{IF}$     | Nominal differential impedance at the IC's IF outputs                                                                                                                               |                   |     | 50        |     | $\Omega$ |
| IF Return Loss                    | $RL_{IF}$    | RF terminated into $50\Omega$ , LO driven by $50\Omega$ source, IF transformed to single-ended $50\Omega$ using external components shown in the <i>Typical Application Circuit</i> |                   |     | 17.5      |     | dB       |
| RF-to-IF Isolation                |              | $P_{LO} = +3dBm$ (Note 8)                                                                                                                                                           |                   |     | 38        |     | dB       |
| LO Leakage at RF Port             |              | $P_{LO} = +3dBm$ (Note 8)                                                                                                                                                           |                   |     | -29       |     | dBm      |
| 2LO Leakage at RF Port            |              | $P_{LO} = +3dBm$                                                                                                                                                                    |                   |     | -30.1     |     | dBm      |
| LO Leakage at IF Port             |              | $P_{LO} = +3dBm$ (Note 8)                                                                                                                                                           |                   |     | -31       |     | dBm      |

## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### 3.3V Supply, RF = 2000MHz to 2900MHz, HIGH-SIDE LO INJECTION AC ELECTRICAL CHARACTERISTICS (DOWNCONVERTER OPERATION)

(*Typical Application Circuit* with tuning elements outlined in [Table 1](#), RF and LO ports are driven from 50Ω sources, Typical values are for  $T_C = +25^\circ\text{C}$ ,  $V_{CC} = 3.3\text{V}$ ,  $P_{RF} = 0\text{dBm}$ ,  $P_{LO} = 0\text{dBm}$ ,  $f_{RF} = 2600\text{MHz}$ ,  $f_{LO} = 2900\text{MHz}$ ,  $f_{IF} = 300\text{MHz}$ , unless otherwise noted.)

| PARAMETER                               | SYMBOL       | CONDITIONS                                                                                                                                                    |                          | MIN | TYP        | MAX | UNITS                |
|-----------------------------------------|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|-----|------------|-----|----------------------|
| Small-Signal Conversion Loss            | $L_C$        | (Note 8)                                                                                                                                                      |                          |     | 7.4        |     | dB                   |
| Loss Variation vs. Frequency            | $\Delta L_C$ | $f_{RF} = 2000\text{MHz}$ to $2900\text{MHz}$ , any 100MHz band                                                                                               |                          |     | $\pm 0.25$ |     | dB                   |
| Conversion Loss Temperature Coefficient | $TC_{CL}$    | $T_C = -40^\circ\text{C}$ to $+85^\circ\text{C}$                                                                                                              |                          |     | 0.0079     |     | dB/ $^\circ\text{C}$ |
| Single Sideband Noise Figure            | $NF_{SSB}$   | No blockers present                                                                                                                                           |                          |     | 7.4        |     | dB                   |
| Noise Figure Temperature Coefficient    | $TC_{NF}$    | Single sideband, no blockers present, $T_C = -40^\circ\text{C}$ to $+85^\circ\text{C}$                                                                        |                          |     | 0.022      |     | dB/ $^\circ\text{C}$ |
| Input 1dB Compression Point             | $IP_{1dB}$   | (Note 10)                                                                                                                                                     |                          |     | 19.7       |     | dBm                  |
| Third-Order Input Intercept Point       | $IIP3$       | $f_{RF1} = 2600\text{MHz}$ , $f_{RF2} = 2601\text{MHz}$ , $P_{RF1} = P_{RF2} = 0\text{dBm}$                                                                   |                          |     | 31         |     | dBm                  |
| IIP3 Variation with $T_C$               |              | $f_{RF1} = 2600\text{MHz}$ , $f_{RF2} = 2601\text{MHz}$ , $P_{RF1} = P_{RF2} = 0\text{dBm}$ , $T_C = -40^\circ\text{C}$ to $+85^\circ\text{C}$                |                          |     | $\pm 0.1$  |     | dB                   |
| 2LO - 2RF Spur Rejection                | $2 \times 2$ | $f_{RF} = 2600\text{MHz}$ , $f_{LO} = 2900\text{MHz}$ , $f_{SPUR} = 2750\text{MHz}$                                                                           | $P_{RF} = -10\text{dBm}$ |     | 72         |     | dBc                  |
|                                         |              |                                                                                                                                                               | $P_{RF} = 0\text{dBm}$   |     | 62         |     |                      |
| 3LO - 3RF Spur Rejection                | $3 \times 3$ | $f_{RF} = 2600\text{MHz}$ , $f_{LO} = 2900\text{MHz}$ , $f_{SPUR} = 2800\text{MHz}$                                                                           | $P_{RF} = -10\text{dBm}$ |     | 85         |     | dBc                  |
|                                         |              |                                                                                                                                                               | $P_{RF} = 0\text{dBm}$   |     | 65         |     |                      |
| RF Input Return Loss                    | $RL_{RF}$    | LO on and IF terminated into a matched impedance                                                                                                              |                          |     | 16         |     | dB                   |
| LO Input Return Loss                    | $RL_{LO}$    | RF and IF terminated into a matched impedance                                                                                                                 |                          |     | 32         |     | dB                   |
| IF Output Impedance                     | $Z_{IF}$     | Nominal differential impedance at the IC's IF outputs                                                                                                         |                          |     | 50         |     | $\Omega$             |
| IF Return Loss                          | $RL_{IF}$    | RF terminated into 50Ω, LO driven by 50Ω source, IF transformed to single-ended 50Ω using external components shown in the <i>Typical Application Circuit</i> |                          |     | 18         |     | dB                   |
| RF-to-IF Isolation                      |              | $P_{LO} = +3\text{dBm}$                                                                                                                                       |                          |     | 38         |     | dB                   |
| LO Leakage at RF Port                   |              | $P_{LO} = +3\text{dBm}$                                                                                                                                       |                          |     | -31.5      |     | dBm                  |
| 2LO Leakage at RF Port                  |              | $P_{LO} = +3\text{dBm}$                                                                                                                                       |                          |     | -30        |     | dBm                  |
| LO Leakage at IF Port                   |              | $P_{LO} = +3\text{dBm}$                                                                                                                                       |                          |     | -31.4      |     | dBm                  |

## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### 5.0V Supply, RF = 3100MHz to 3900MHz, LOW-SIDE LO INJECTION AC ELECTRICAL CHARACTERISTICS (DOWNCONVERTER OPERATION)

(*Typical Application Circuit* with tuning elements outlined in [Table 1](#). Typical values are for  $T_C = +25^\circ\text{C}$ ,  $V_{CC} = 5.0\text{V}$ ,  $P_{RF} = 0\text{dBm}$ ,  $P_{LO} = 0\text{dBm}$ ,  $f_{RF} = 3500\text{MHz}$ ,  $f_{LO} = 3200\text{MHz}$ ,  $f_{IF} = 300\text{MHz}$ , unless otherwise noted.)

| PARAMETER                               | SYMBOL       | CONDITIONS                                                                                                                                                                          | MIN                      | TYP         | MAX | UNITS                |
|-----------------------------------------|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|-------------|-----|----------------------|
| Small-Signal Conversion Loss            | $L_C$        |                                                                                                                                                                                     |                          | 8.2         |     | dB                   |
| Loss Variation vs. Frequency            | $\Delta L_C$ | $f_{RF} = 3450\text{MHz}$ to $3750\text{MHz}$ , any 100MHz band                                                                                                                     |                          | $\pm 0.085$ |     | dB                   |
|                                         |              | $f_{RF} = 3450\text{MHz}$ to $3750\text{MHz}$ , any 200MHz band                                                                                                                     |                          | $\pm 0.17$  |     | dB                   |
| Conversion Loss Temperature Coefficient | $TC_{CL}$    | $T_C = -40^\circ\text{C}$ to $+85^\circ\text{C}$                                                                                                                                    |                          | 0.0091      |     | dB/ $^\circ\text{C}$ |
| Single Sideband Noise Figure            | $NF_{SSB}$   | No blockers present                                                                                                                                                                 |                          | 7.6         |     | dB                   |
| Noise Figure Temperature Coefficient    | $TC_{NF}$    | Single sideband, no blockers present, $T_C = -40^\circ\text{C}$ to $+85^\circ\text{C}$                                                                                              |                          | 0.025       |     | dB/ $^\circ\text{C}$ |
| Input 1dB Compression Point             | $IP_{1dB}$   | (Note 10)                                                                                                                                                                           |                          | 20.6        |     | dBm                  |
| Third-Order Input Intercept Point       | IIP3         | $f_{RF1} - f_{RF2} = 1\text{MHz}$ , $P_{RF1} = P_{RF2} = 0\text{dBm}$                                                                                                               |                          | 31          |     | dBm                  |
| IIP3 Variation with $T_C$               |              | $f_{RF1} - f_{RF2} = 1\text{MHz}$ , $P_{RF1} = P_{RF2} = 0\text{dBm}$ , $T_C = -40^\circ\text{C}$ to $+85^\circ\text{C}$                                                            |                          | $\pm 0.5$   |     | dB                   |
| 2RF - 2LO Spur Rejection                | 2 x 2        | $f_{RF} = 3500\text{MHz}$ ,<br>$f_{LO} = 3200\text{MHz}$ ,<br>$f_{SPUR} = 3350\text{MHz}$                                                                                           | $P_{RF} = -10\text{dBm}$ | 71          |     | dBc                  |
|                                         |              |                                                                                                                                                                                     | $P_{RF} = 0\text{dBm}$   | 61          |     |                      |
| 3RF - 3LO Spur Rejection                | 3 x 3        | $f_{RF} = 3500\text{MHz}$ ,<br>$f_{LO} = 3200\text{MHz}$ ,<br>$f_{SPUR} = 3300\text{MHz}$                                                                                           | $P_{RF} = -10\text{dBm}$ | 87          |     | dBc                  |
|                                         |              |                                                                                                                                                                                     | $P_{RF} = 0\text{dBm}$   | 67          |     |                      |
| RF Input Return Loss                    | $RL_{RF}$    | LO on and IF terminated into a matched impedance                                                                                                                                    |                          | 15          |     | dB                   |
| LO Input Return Loss                    | $RL_{LO}$    | RF and IF terminated into a matched impedance                                                                                                                                       |                          | 20          |     | dB                   |
| IF Output Impedance                     | $Z_{IF}$     | Nominal differential impedance at the IC's IF outputs                                                                                                                               |                          | 50          |     | $\Omega$             |
| IF Return Loss                          | $RL_{IF}$    | RF terminated into $50\Omega$ , LO driven by $50\Omega$ source, IF transformed to single-ended $50\Omega$ using external components shown in the <i>Typical Application Circuit</i> |                          | 16.5        |     | dB                   |
| RF-to-IF Isolation                      |              | $P_{LO} = +3\text{dBm}$                                                                                                                                                             |                          | 35          |     | dB                   |
| LO Leakage at RF Port                   |              | $P_{LO} = +3\text{dBm}$                                                                                                                                                             |                          | -29.5       |     | dBm                  |
| 2LO Leakage at RF Port                  |              | $P_{LO} = +3\text{dBm}$                                                                                                                                                             |                          | -23         |     | dBm                  |
| LO Leakage at IF Port                   |              | $P_{LO} = +3\text{dBm}$                                                                                                                                                             |                          | -31.5       |     | dBm                  |

## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### 5.0V Supply, RF = 3100MHz to 3900MHz, HIGH-SIDE LO INJECTION AC ELECTRICAL CHARACTERISTICS (DOWNCONVERTER OPERATION)

([Typical Application Circuit](#) with tuning elements outlined in [Table 1](#). Typical values are for  $T_C = +25^\circ\text{C}$ ,  $V_{CC} = 5.0\text{V}$ ,  $P_{RF} = 0\text{dBm}$ ,  $P_{LO} = 0\text{dBm}$ ,  $f_{RF} = 3500\text{MHz}$ ,  $f_{LO} = 3800\text{MHz}$ ,  $f_{IF} = 300\text{MHz}$ , unless otherwise noted.)

| PARAMETER                               | SYMBOL       | CONDITIONS                                                                                                                                                                          | MIN                      | TYP       | MAX | UNITS                |
|-----------------------------------------|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|-----------|-----|----------------------|
| Small-Signal Conversion Loss            | $L_C$        |                                                                                                                                                                                     |                          | 8.6       |     | dB                   |
| Loss Variation vs. Frequency            | $\Delta L_C$ | $f_{RF} = 3450\text{MHz}$ to $3750\text{MHz}$ , any 100MHz band                                                                                                                     |                          | $\pm 0.1$ |     | dB                   |
|                                         |              | $f_{RF} = 3450\text{MHz}$ to $3750\text{MHz}$ , any 200MHz band                                                                                                                     |                          | $\pm 0.2$ |     | dB                   |
| Conversion Loss Temperature Coefficient | $TC_{CL}$    | $T_C = -40^\circ\text{C}$ to $+85^\circ\text{C}$                                                                                                                                    |                          | 0.01      |     | dB/ $^\circ\text{C}$ |
| Single Sideband Noise Figure            | $NF_{SSB}$   | No blockers present                                                                                                                                                                 |                          | 9         |     | dB                   |
| Noise Figure Temperature Coefficient    | $TC_{NF}$    | Single sideband, no blockers present, $T_C = -40^\circ\text{C}$ to $+85^\circ\text{C}$                                                                                              |                          | 0.025     |     | dB/ $^\circ\text{C}$ |
| Input 1dB Compression Point             | $IP_{1dB}$   | (Note 10)                                                                                                                                                                           |                          | 18        |     | dBm                  |
| Third-Order Input Intercept Point       | $IIP3$       | $f_{RF1} = 3500\text{MHz}$ , $f_{RF2} = 3501\text{MHz}$ , $P_{RF1} = P_{RF2} = 0\text{dBm}$                                                                                         |                          | 28.6      |     | dBm                  |
| IIP3 Variation with $T_C$               |              | $f_{RF1} = 3500\text{MHz}$ , $f_{RF2} = 3501\text{MHz}$ , $P_{RF1} = P_{RF2} = 0\text{dBm}$ , $T_C = -40^\circ\text{C}$ to $+85^\circ\text{C}$                                      |                          | $\pm 0.5$ |     | dB                   |
| 2LO - 2RF Spur Rejection                | 2 x 2        | $f_{RF} = 3500\text{MHz}$ , $f_{LO} = 3800\text{MHz}$ , $f_{SPUR} = 3650\text{MHz}$                                                                                                 | $P_{RF} = -10\text{dBm}$ | 70        |     | dBc                  |
|                                         |              |                                                                                                                                                                                     | $P_{RF} = 0\text{dBm}$   | 60        |     |                      |
| 3LO - 3RF Spur Rejection                | 3 x 3        | $f_{RF} = 3500\text{MHz}$ , $f_{LO} = 3800\text{MHz}$ , $f_{SPUR} = 3700\text{MHz}$                                                                                                 | $P_{RF} = -10\text{dBm}$ | 83        |     | dBc                  |
|                                         |              |                                                                                                                                                                                     | $P_{RF} = 0\text{dBm}$   | 63        |     |                      |
| RF Input Return Loss                    | $RL_{RF}$    | LO on and IF terminated into a matched impedance                                                                                                                                    |                          | 15.5      |     | dB                   |
| LO Input Return Loss                    | $RL_{LO}$    | RF and IF terminated into a matched impedance                                                                                                                                       |                          | 18.5      |     | dB                   |
| IF Output Impedance                     | $Z_{IF}$     | Nominal differential impedance at the IC's IF outputs                                                                                                                               |                          | 50        |     | $\Omega$             |
| IF Return Loss                          | $RL_{IF}$    | RF terminated into $50\Omega$ , LO driven by $50\Omega$ source, IF transformed to single-ended $50\Omega$ using external components shown in the <i>Typical Application Circuit</i> |                          | 16        |     | dB                   |
| RF-to-IF Isolation                      |              | $P_{LO} = +3\text{dBm}$                                                                                                                                                             |                          | 35        |     | dB                   |
| LO Leakage at RF Port                   |              | $P_{LO} = +3\text{dBm}$                                                                                                                                                             |                          | -36.4     |     | dBm                  |
| 2LO Leakage at RF Port                  |              | $P_{LO} = +3\text{dBm}$                                                                                                                                                             |                          | -12.8     |     | dBm                  |
| LO Leakage at IF Port                   |              | $P_{LO} = +3\text{dBm}$                                                                                                                                                             |                          | -31       |     | dBm                  |

## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### 5.0V Supply, RF = 1650MHz to 2250MHz, HIGH-SIDE LO INJECTION AC ELECTRICAL CHARACTERISTICS (DOWNCONVERTER OPERATION)

([Typical Application Circuit](#) with tuning elements outlined in [Table 1](#). Typical values are for  $T_C = +25^\circ\text{C}$ ,  $V_{CC} = 5.0\text{V}$ ,  $P_{RF} = 0\text{dBm}$ ,  $P_{LO} = 0\text{dBm}$ ,  $f_{RF} = 1850\text{MHz}$ ,  $f_{LO} = 2150\text{MHz}$ ,  $f_{IF} = 300\text{MHz}$ , unless otherwise noted.)

| PARAMETER                               | SYMBOL       | CONDITIONS                                                                                                                                                                          | MIN                      | TYP        | MAX | UNITS                |
|-----------------------------------------|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|------------|-----|----------------------|
| Small-Signal Conversion Loss            | $L_C$        |                                                                                                                                                                                     |                          | 7.5        |     | dB                   |
| Loss Variation vs. Frequency            | $\Delta L_C$ | $f_{RF} = 1650\text{MHz}$ to $1850\text{MHz}$ , any 100MHz band                                                                                                                     |                          | $\pm 0.18$ |     | dB                   |
|                                         |              | $f_{RF} = 1850\text{MHz}$ to $2250\text{MHz}$ , any 100MHz band                                                                                                                     |                          | $\pm 0.15$ |     |                      |
|                                         |              | $f_{RF} = 1650\text{MHz}$ to $1850\text{MHz}$ , any 200MHz band                                                                                                                     |                          | $\pm 0.36$ |     |                      |
|                                         |              | $f_{RF} = 1850\text{MHz}$ to $2250\text{MHz}$ , any 200MHz band                                                                                                                     |                          | $\pm 0.3$  |     |                      |
| Conversion Loss Temperature Coefficient | $TC_{CL}$    | $T_C = -40^\circ\text{C}$ to $+85^\circ\text{C}$                                                                                                                                    |                          | 0.0067     |     | dB/ $^\circ\text{C}$ |
| Single Sideband Noise Figure            | $NF_{SSB}$   | No blockers present                                                                                                                                                                 |                          | 7          |     | dB                   |
| Noise Figure Temperature Coefficient    | $TC_{NF}$    | Single sideband, no blockers present, $T_C = -40^\circ\text{C}$ to $+85^\circ\text{C}$                                                                                              |                          | 0.021      |     | dB/ $^\circ\text{C}$ |
| Input 1dB Compression Point             | $IP_{1dB}$   | (Note 10)                                                                                                                                                                           |                          | 23         |     | dBm                  |
| Third-Order Input Intercept Point       | $IIP3$       | $f_{RF1} = 1850\text{MHz}$ , $f_{RF2} = 1851\text{MHz}$ , $P_{RF1} = P_{RF2} = 0\text{dBm}$                                                                                         |                          | 34.8       |     | dBm                  |
| IIP3 Variation with $T_C$               |              | $f_{RF1} = 1850\text{MHz}$ , $f_{RF2} = 1851\text{MHz}$ , $P_{RF1} = P_{RF2} = 0\text{dBm}$ , $T_C = -40^\circ\text{C}$ to $+85^\circ\text{C}$                                      |                          | $\pm 0.5$  |     | dB                   |
| 2LO - 2RF Spur Rejection                | 2 x 2        | $f_{RF} = 1850\text{MHz}$ , $f_{LO} = 2150\text{MHz}$ , $f_{SPUR} = 2000\text{MHz}$                                                                                                 | $P_{RF} = -10\text{dBm}$ | 83         |     | dBc                  |
|                                         |              |                                                                                                                                                                                     | $P_{RF} = 0\text{dBm}$   | 73         |     |                      |
| 3LO - 3RF Spur Rejection                | 3 x 3        | $f_{RF} = 1850\text{MHz}$ , $f_{LO} = 2150\text{MHz}$ , $f_{SPUR} = 2050\text{MHz}$                                                                                                 | $P_{RF} = -10\text{dBm}$ | 94         |     | dBc                  |
|                                         |              |                                                                                                                                                                                     | $P_{RF} = 0\text{dBm}$   | 74         |     |                      |
| RF Input Return Loss                    | $RL_{RF}$    | LO on and IF terminated into a matched impedance                                                                                                                                    |                          | 16.4       |     | dB                   |
| LO Input Return Loss                    | $RL_{LO}$    | RF and IF terminated into a matched impedance                                                                                                                                       |                          | 25.2       |     | dB                   |
| IF Output Impedance                     | $Z_{IF}$     | Nominal differential impedance at the IC's IF outputs                                                                                                                               |                          | 50         |     | $\Omega$             |
| IF Return Loss                          | $RL_{IF}$    | RF terminated into $50\Omega$ , LO driven by $50\Omega$ source, IF transformed to single-ended $50\Omega$ using external components shown in the <i>Typical Application Circuit</i> |                          | 17         |     | dB                   |
| RF-to-IF Isolation                      |              | $P_{LO} = +3\text{dBm}$                                                                                                                                                             |                          | 48.7       |     | dB                   |
| LO Leakage at RF Port                   |              | $P_{LO} = +3\text{dBm}$                                                                                                                                                             |                          | -28.8      |     | dBm                  |
| 2LO Leakage at RF Port                  |              | $P_{LO} = +3\text{dBm}$                                                                                                                                                             |                          | -35.3      |     | dBm                  |
| LO Leakage at IF Port                   |              | $P_{LO} = +3\text{dBm}$                                                                                                                                                             |                          | -20.8      |     | dBm                  |

## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### 5.0V Supply, RF = 1650MHz to 2250MHz, LOW-SIDE LO INJECTION AC ELECTRICAL CHARACTERISTICS (DOWNCONVERTER OPERATION)

(*Typical Application Circuit* with tuning elements outlined in [Table 1](#). Typical values are for  $T_C = +25^\circ\text{C}$ ,  $V_{CC} = 5.0\text{V}$ ,  $P_{RF} = 0\text{dBm}$ ,  $P_{LO} = 0\text{dBm}$ ,  $f_{RF} = 1850\text{MHz}$ ,  $f_{LO} = 1550\text{MHz}$ ,  $f_{IF} = 300\text{MHz}$ , unless otherwise noted.)

| PARAMETER                               | SYMBOL       | CONDITIONS                                                                                                                                                                          | MIN | TYP         | MAX | UNITS                |
|-----------------------------------------|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|-------------|-----|----------------------|
| Small-Signal Conversion Loss            | $L_C$        |                                                                                                                                                                                     |     | 8.5         |     | dB                   |
| Loss Variation vs. Frequency            | $\Delta L_C$ | $f_{RF} = 1650\text{MHz}$ to $1850\text{MHz}$ , any 100MHz band                                                                                                                     |     | $\pm 0.35$  |     | dB                   |
|                                         |              | $f_{RF} = 1850\text{MHz}$ to $2250\text{MHz}$ , any 100MHz band                                                                                                                     |     | $\pm 0.075$ |     |                      |
|                                         |              | $f_{RF} = 1650\text{MHz}$ to $1850\text{MHz}$ , any 200MHz band                                                                                                                     |     | $\pm 0.7$   |     |                      |
|                                         |              | $f_{RF} = 1850\text{MHz}$ to $2250\text{MHz}$ , any 200MHz band                                                                                                                     |     | $\pm 0.15$  |     |                      |
| Conversion Loss Temperature Coefficient | $TC_{CL}$    | $T_C = -40^\circ\text{C}$ to $+85^\circ\text{C}$                                                                                                                                    |     | 0.0095      |     | dB/ $^\circ\text{C}$ |
| Single Sideband Noise Figure            | $NF_{SSB}$   | No blockers present                                                                                                                                                                 |     | 8.95        |     | dB                   |
| Noise Figure Temperature Coefficient    | $TC_{NF}$    | Single sideband, no blockers present, $T_C = -40^\circ\text{C}$ to $+85^\circ\text{C}$                                                                                              |     | 0.024       |     | dB/ $^\circ\text{C}$ |
| Input 1dB Compression Point             | $IP_{1dB}$   | (Note 10)                                                                                                                                                                           |     | 17.2        |     | dBm                  |
| Third-Order Input Intercept Point       | $IIP3$       | $f_{RF1} = 1850\text{MHz}$ , $f_{RF2} = 1851\text{MHz}$ , $P_{RF1} = P_{RF2} = 0\text{dBm}$                                                                                         |     | 26.7        |     | dBm                  |
| IIP3 Variation with $T_C$               |              | $f_{RF1} = 1850\text{MHz}$ , $f_{RF2} = 1851\text{MHz}$ , $P_{RF1} = P_{RF2} = 0\text{dBm}$ , $T_C = -40^\circ\text{C}$ to $+85^\circ\text{C}$                                      |     | $\pm 0.5$   |     | dB                   |
| 2RF - 2LO Spur Rejection                | $2 \times 2$ | $f_{RF} = 1850\text{MHz}$ , $f_{LO} = 1550\text{MHz}$ , $f_{SPUR} = 1700\text{MHz}$ , $P_{RF} = -10\text{dBm}$                                                                      |     | 71          |     | dBc                  |
|                                         |              | $P_{RF} = 0\text{dBm}$                                                                                                                                                              |     | 61          |     |                      |
| 3RF - 3LO Spur Rejection                | $3 \times 3$ | $f_{RF} = 1850\text{MHz}$ , $f_{LO} = 1550\text{MHz}$ , $f_{SPUR} = 1650\text{MHz}$ , $P_{RF} = -10\text{dBm}$                                                                      |     | 83          |     | dBc                  |
|                                         |              | $P_{RF} = 0\text{dBm}$                                                                                                                                                              |     | 63          |     |                      |
| RF Input Return Loss                    | $RL_{RF}$    | LO on and IF terminated into a matched impedance                                                                                                                                    |     | 12.4        |     | dB                   |
| LO Input Return Loss                    | $RL_{LO}$    | RF and IF terminated into a matched impedance                                                                                                                                       |     | 17.3        |     | dB                   |
| IF Output Impedance                     | $Z_{IF}$     | Nominal differential impedance at the IC's IF outputs                                                                                                                               |     | 50          |     | $\Omega$             |
| IF Return Loss                          | $RL_{IF}$    | RF terminated into $50\Omega$ , LO driven by $50\Omega$ source, IF transformed to single-ended $50\Omega$ using external components shown in the <i>Typical Application Circuit</i> |     | 19.3        |     | dB                   |
| RF-to-IF Isolation                      |              | $P_{LO} = +3\text{dBm}$                                                                                                                                                             |     | 44.6        |     | dB                   |
| LO Leakage at RF Port                   |              | $P_{LO} = +3\text{dBm}$                                                                                                                                                             |     | -29.5       |     | dBm                  |
| 2LO Leakage at RF Port                  |              | $P_{LO} = +3\text{dBm}$                                                                                                                                                             |     | -29.5       |     | dBm                  |
| LO Leakage at IF Port                   |              | $P_{LO} = +3\text{dBm}$                                                                                                                                                             |     | -29.7       |     | dBm                  |

## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### 5.0V Supply, RF = 2000MHz to 2900MHz, HIGH-SIDE LO INJECTION AC ELECTRICAL CHARACTERISTICS (UPCONVERTER OPERATION)

([Typical Application Circuit](#) with tuning elements outlined in [Table 2](#). Typical values are for  $T_C = +25^\circ\text{C}$ ,  $V_{CC} = 5.0\text{V}$ ,  $P_{IF} = 0\text{dBm}$ ,  $P_{LO} = 0\text{dBm}$ ,  $f_{RF} = 2600\text{MHz}$ ,  $f_{LO} = 2900\text{MHz}$ ,  $f_{IF} = 300\text{MHz}$ , unless otherwise noted.)

| PARAMETER                               | SYMBOL       | CONDITIONS                                                                                                                             | MIN | TYP        | MAX | UNITS                |
|-----------------------------------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------|-----|------------|-----|----------------------|
| Conversion Loss                         | $L_C$        |                                                                                                                                        |     | 7.3        |     | dB                   |
| Conversion Loss Variation vs. Frequency | $\Delta L_C$ | $f_{RF} = 2010\text{MHz to } 2025\text{MHz}$                                                                                           |     | $\pm 0.05$ |     | dB                   |
|                                         |              | $f_{RF} = 2305\text{MHz to } 2360\text{MHz}$                                                                                           |     | $\pm 0.05$ |     |                      |
|                                         |              | $f_{RF} = 2500\text{MHz to } 2570\text{MHz}$                                                                                           |     | $\pm 0.05$ |     |                      |
|                                         |              | $f_{RF} = 2570\text{MHz to } 2620\text{MHz}$                                                                                           |     | $\pm 0.05$ |     |                      |
|                                         |              | $f_{RF} = 2500\text{MHz to } 2690\text{MHz}$                                                                                           |     | $\pm 0.15$ |     |                      |
|                                         |              | $f_{RF} = 2700\text{MHz to } 2900\text{MHz}$                                                                                           |     | $\pm 0.2$  |     |                      |
| Conversion Loss Temperature Coefficient | $TC_{CL}$    | $T_C = -40^\circ\text{C to } +85^\circ\text{C}$                                                                                        |     | 0.007      |     | dB/ $^\circ\text{C}$ |
| Input 1dB Compression Point             | $IP_{1dB}$   | (Note 10)                                                                                                                              |     | 22         |     | dBm                  |
| Input Third-Order Intercept Point       | IIP3         | $f_{IF1} = 300\text{MHz}$ , $f_{IF2} = 301\text{MHz}$ , $P_{IF} = 0\text{dBm/ tone}$                                                   |     | 32.8       |     | dBm                  |
| IIP3 Variation with $T_C$               | IIP3         | $f_{IF1} = 300\text{MHz}$ , $f_{IF2} = 301\text{MHz}$ , $P_{IF} = 0\text{dBm/ tone}$ , $T_C = -40^\circ\text{C to } +85^\circ\text{C}$ |     | $\pm 0.5$  |     | dB                   |
| LO $\pm 2\text{IF}$ Spur                |              | LO - 2IF                                                                                                                               |     | 61         |     | dBc                  |
|                                         |              | LO + 2IF                                                                                                                               |     | 62         |     |                      |
| LO $\pm 3\text{IF}$ Spur                |              | LO - 3IF                                                                                                                               |     | 72         |     | dBc                  |
|                                         |              | LO + 3IF                                                                                                                               |     | 85         |     |                      |
| Output Noise Floor                      |              | $P_{OUT} = 0\text{dBm}$ (Note 9)                                                                                                       |     | -163       |     | dBm/Hz               |

## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### 3.3V Supply, RF = 2000MHz to 2900MHz, HIGH-SIDE LO INJECTION AC ELECTRICAL CHARACTERISTICS (UPCONVERTER OPERATION)

([Typical Application Circuit](#) with tuning elements outlined in [Table 2](#). Typical values are for  $T_C = +25^\circ\text{C}$ ,  $V_{CC} = 3.3\text{V}$ ,  $P_{IF} = 0\text{dBm}$ ,  $P_{LO} = 0\text{dBm}$ ,  $f_{RF} = 2600\text{MHz}$ ,  $f_{LO} = 2900\text{MHz}$ ,  $f_{IF} = 300\text{MHz}$ , unless otherwise noted.)

| PARAMETER                               | SYMBOL       | CONDITIONS                                                                                                                                    | MIN | TYP        | MAX | UNITS                |
|-----------------------------------------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-----|------------|-----|----------------------|
| Conversion Loss                         | $L_C$        |                                                                                                                                               |     | 7.3        |     | dB                   |
| Conversion Loss Variation vs. Frequency | $\Delta L_C$ | $f_{RF} = 2000\text{MHz}$ to $2900\text{MHz}$ , any 100MHz band                                                                               |     | $\pm 0.25$ |     | dB                   |
| Conversion Loss Temperature Coefficient | $TC_{CL}$    | $T_C = -40^\circ\text{C}$ to $+85^\circ\text{C}$                                                                                              |     | 0.008      |     | dB/ $^\circ\text{C}$ |
| Input 1dB Compression Point             | $IP_{1dB}$   | (Note 10)                                                                                                                                     |     | 20.5       |     | dBm                  |
| Input Third-Order Intercept Point       | $IIP3$       | $f_{IF1} = 300\text{MHz}$ , $f_{IF2} = 301\text{MHz}$ , $P_{IF} = 0\text{dBm}/\text{tone}$                                                    |     | 30         |     | dBm                  |
| IIP3 Variation with $T_C$               | $IIP3$       | $f_{IF1} = 300\text{MHz}$ , $f_{IF2} = 301\text{MHz}$ , $P_{IF} = 0\text{dBm}/\text{tone}$ , $T_C = -40^\circ\text{C}$ to $+85^\circ\text{C}$ |     | $\pm 0.6$  |     | dB                   |
| LO $\pm 2\text{IF}$ Spur                |              | LO - 2IF                                                                                                                                      |     | 60         |     | dBc                  |
|                                         |              | LO + 2IF                                                                                                                                      |     | 64         |     |                      |
| LO $\pm 3\text{IF}$ Spur                |              | LO - 3IF                                                                                                                                      |     | 68         |     | dBc                  |
|                                         |              | LO + 3IF                                                                                                                                      |     | 80         |     |                      |
| Output Noise Floor                      |              | $P_{OUT} = 0\text{dBm}$ (Note 9)                                                                                                              |     | -160       |     | dBm/Hz               |

**Note 5:** Not production tested.

**Note 6:** Operation outside this range is possible, but with degraded performance of some parameters. See the [Typical Operating Characteristics](#).

**Note 7:** All limits reflect losses of external components, including a 0.5dB loss at  $f_{IF} = 300\text{MHz}$  due to the 1:1 impedance transformer. Output measurements were taken at IF outputs of the [Typical Application Circuit](#).

**Note 8:** 100% production tested for functional performance.

**Note 9:** Measured with external LO source noise filtered so that the noise floor is -174dBm/Hz at 100MHz offset. This specification reflects the effects of all SNR degradations in the mixer including the LO noise, as defined in Application Note 2021: *Specifications and Measurement of Local Oscillator Noise in Integrated Circuit Base Station Mixers*.










**Note 10:** Maximum reliable continuous input power applied to the RF or IF port of this device is +12dBm from a 50 $\Omega$  source.

## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Typical Operating Characteristics

(Typical Application Circuit with tuning elements outlined in Table 1,  $V_{CC} = 5.0V$ ,  $f_{RF} = 2000MHz$  to  $2900MHz$ , LO is high-side injected for a 300MHz IF,  $P_{RF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)

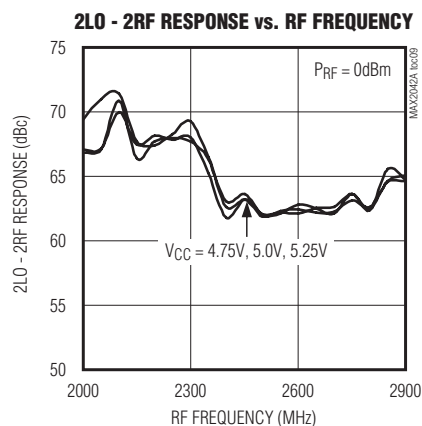
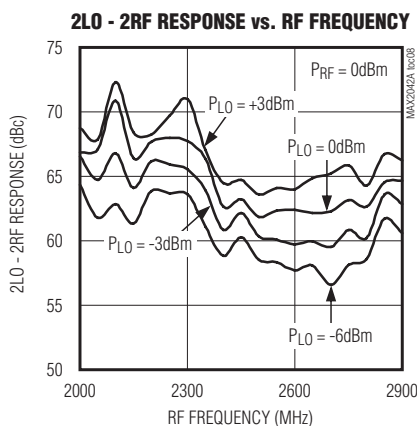
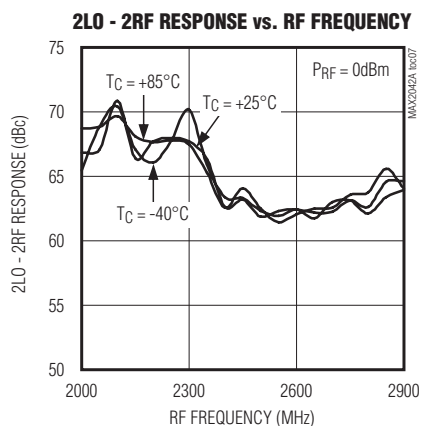
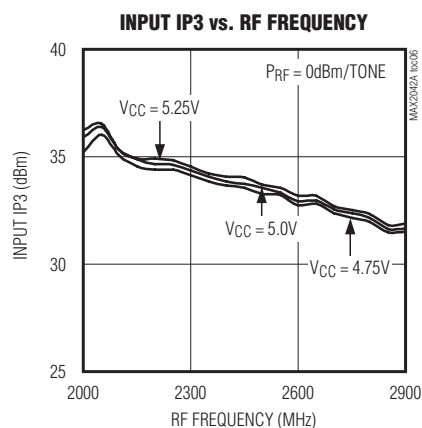
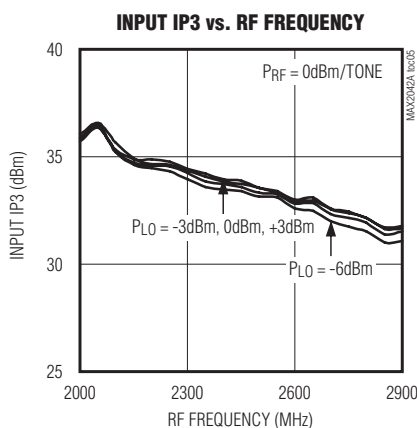
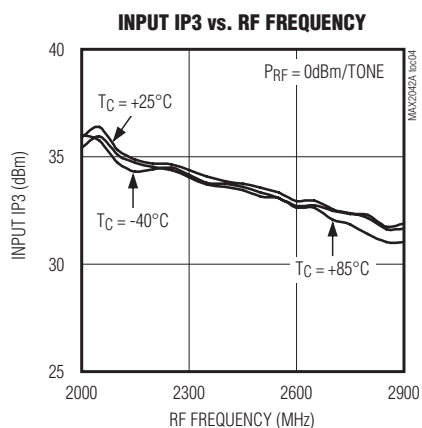
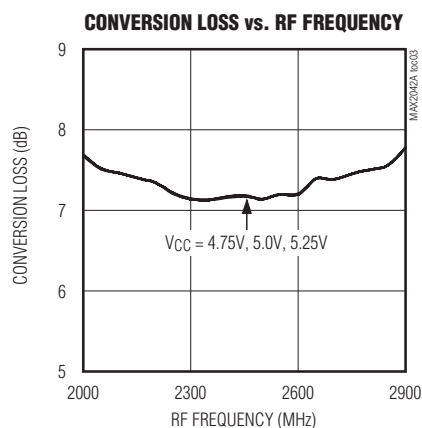
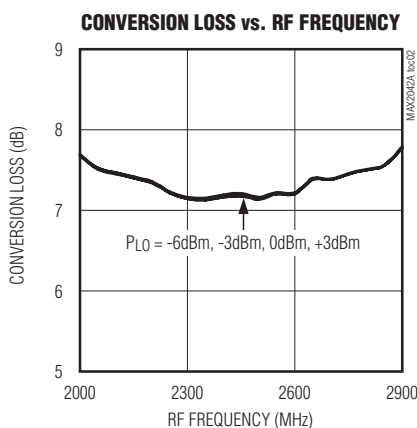
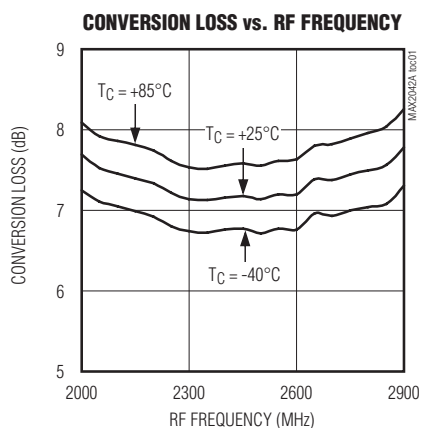


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 1,  $V_{CC} = 5.0V$ ,  $f_{RF} = 2000MHz$  to  $2900MHz$ , LO is high-side injected for a 300MHz IF,  $P_{RF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)

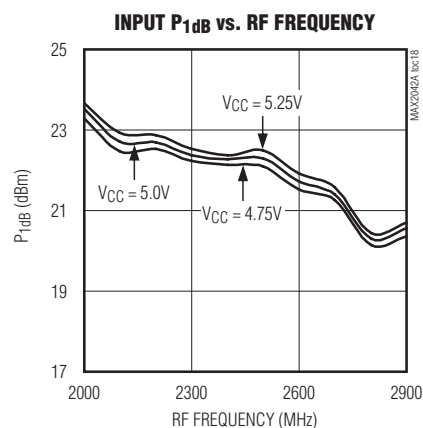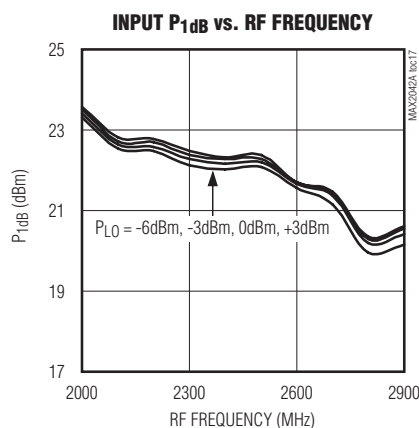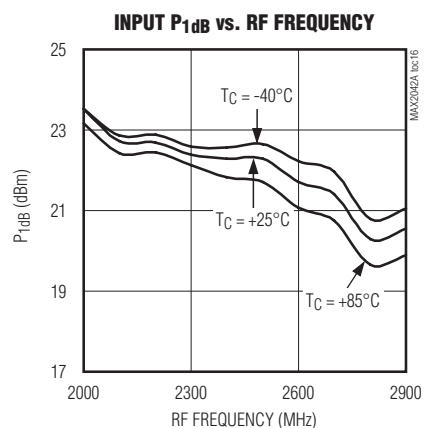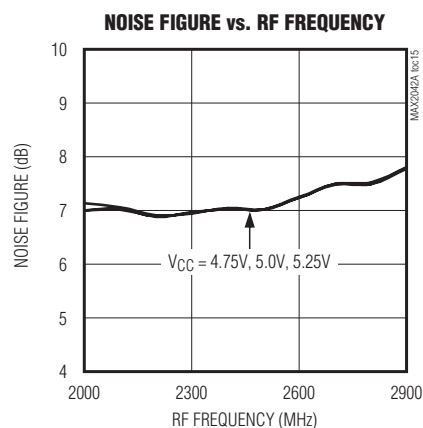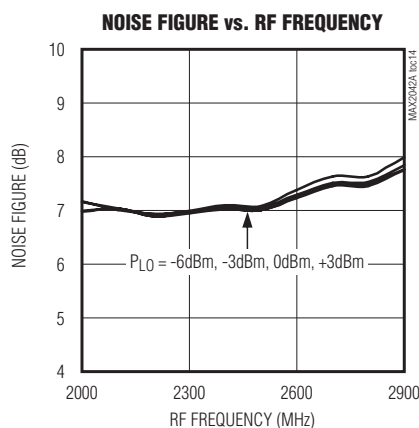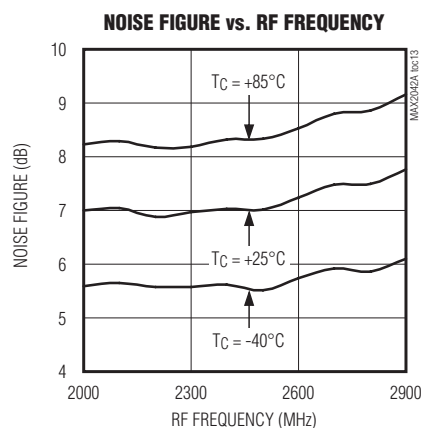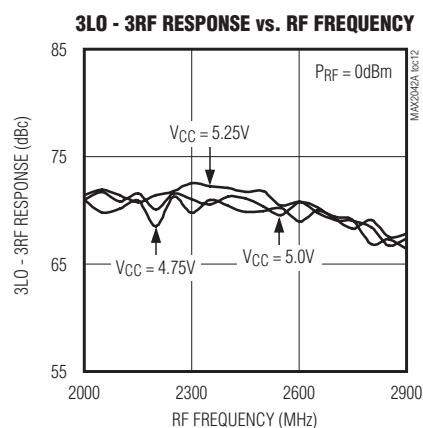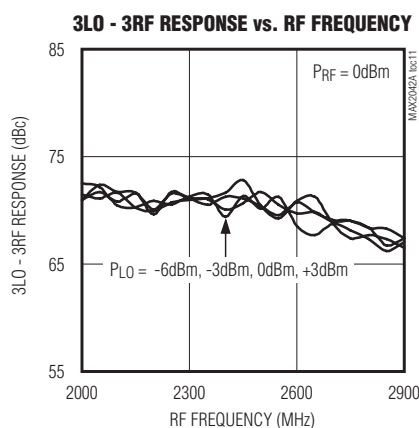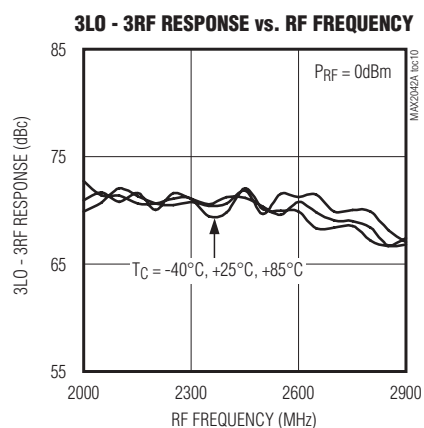


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer


### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 1,  $V_{CC} = 5.0V$ ,  $f_{RF} = 2000MHz$  to  $2900MHz$ , LO is high-side injected for a 300MHz IF,  $P_{RF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)


LO LEAKAGE AT IF PORT vs. LO FREQUENCY

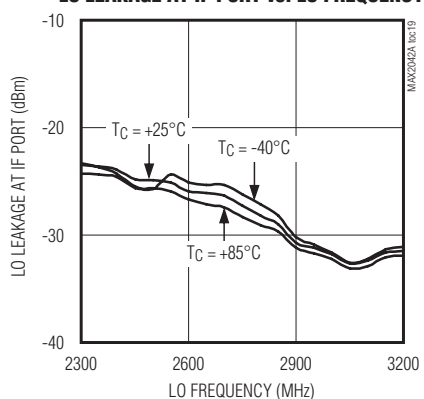


LO LEAKAGE AT IF PORT vs. LO FREQUENCY

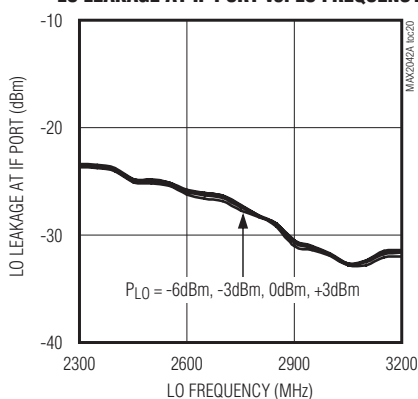


LO LEAKAGE AT IF PORT vs. LO FREQUENCY

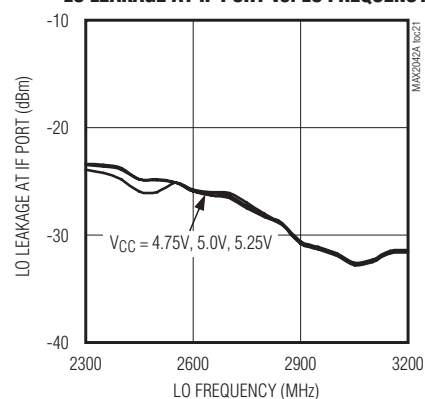


RF-TO-IF ISOLATION vs. RF FREQUENCY

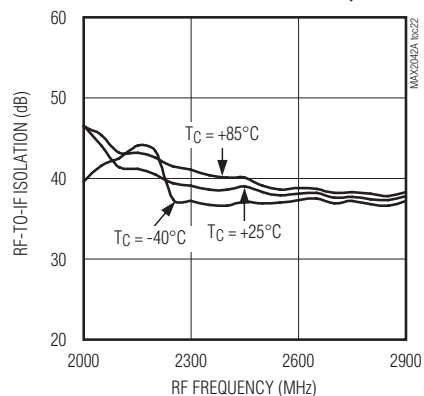


RF-TO-IF ISOLATION vs. RF FREQUENCY

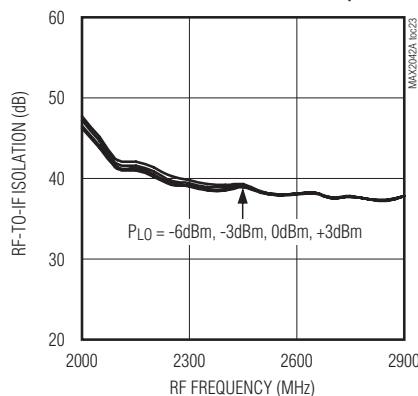


RF-TO-IF ISOLATION vs. RF FREQUENCY

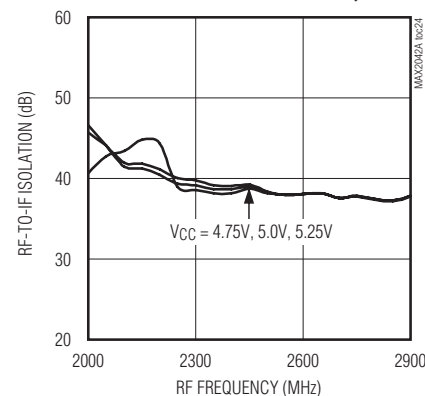


LO LEAKAGE AT RF PORT vs. LO FREQUENCY

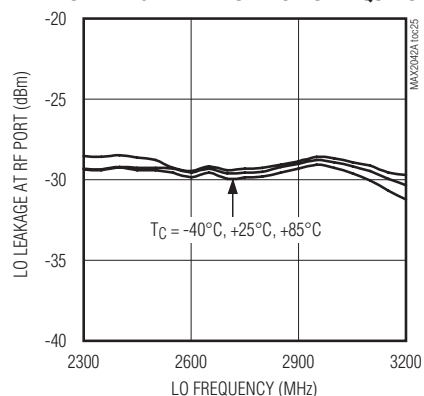

LO LEAKAGE AT RF PORT vs. LO FREQUENCY

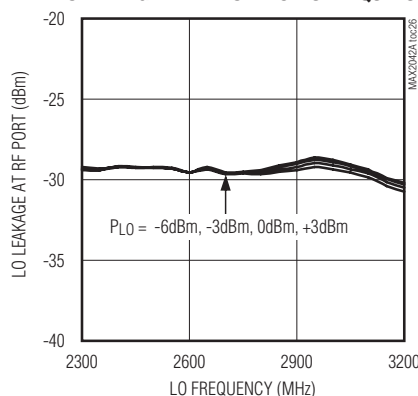

LO LEAKAGE AT RF PORT vs. LO FREQUENCY

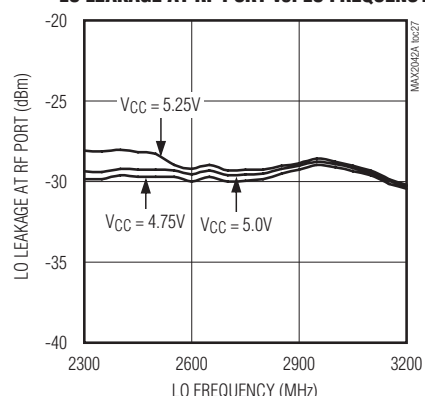


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer


### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 1,  $V_{CC} = 5.0V$ ,  $f_{RF} = 2000MHz$  to  $2900MHz$ , LO is high-side injected for a 300MHz IF,  $P_{RF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)


2LO LEAKAGE AT RF PORT vs. LO FREQUENCY

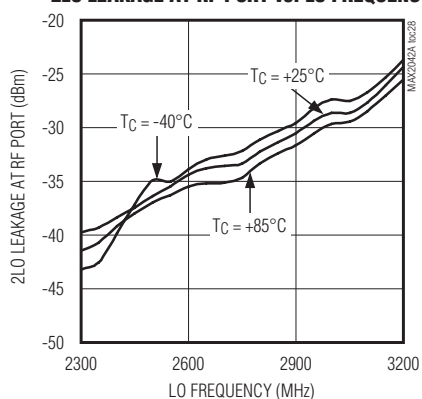


2LO LEAKAGE AT RF PORT vs. LO FREQUENCY

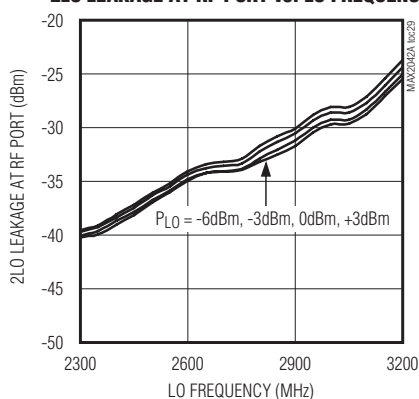


2LO LEAKAGE AT RF PORT vs. LO FREQUENCY

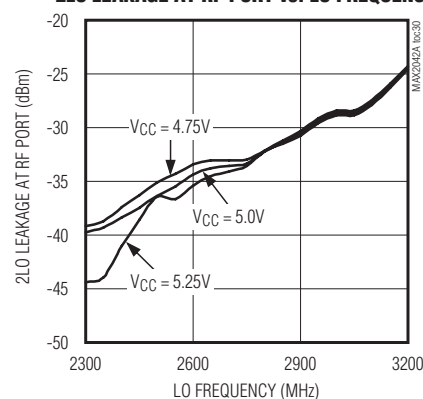


RF PORT RETURN LOSS vs. RF FREQUENCY

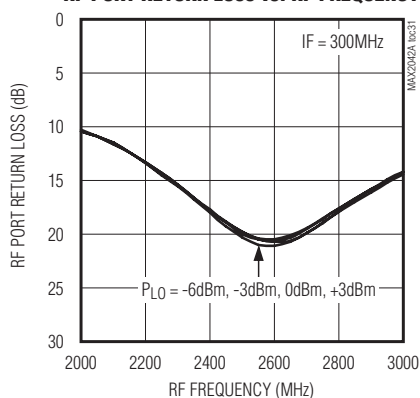


IF PORT RETURN LOSS vs. IF FREQUENCY

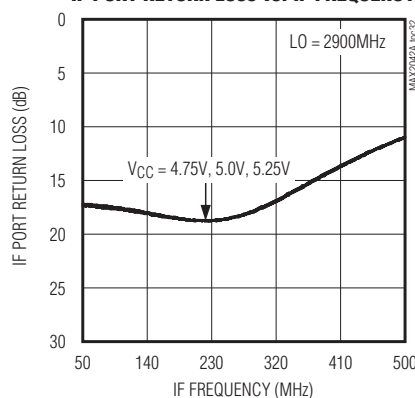

LO RETURN LOSS vs. LO FREQUENCY

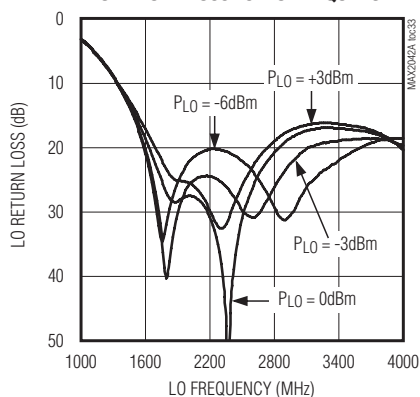

SUPPLY CURRENT vs. TEMPERATURE ( $T_C$ )









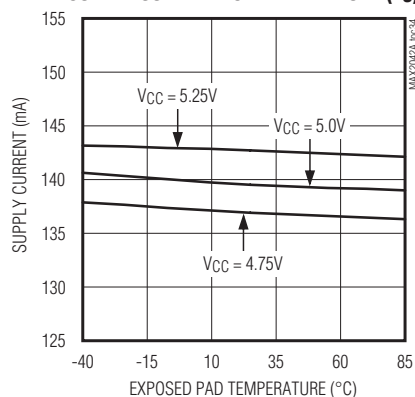


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 1,  $V_{CC} = 3.3V$ ,  $f_{RF} = 2000MHz$  to  $2900MHz$ , LO is high-side injected for a 300MHz IF,  $P_{RF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)

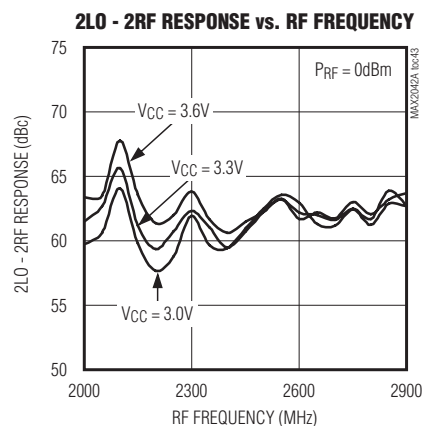
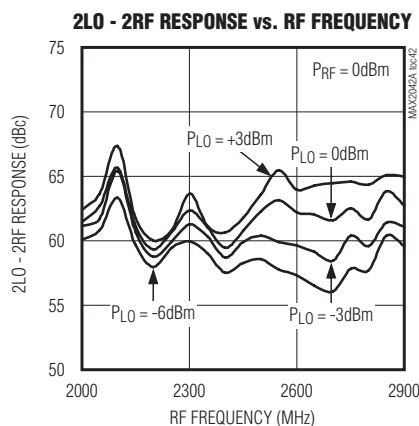
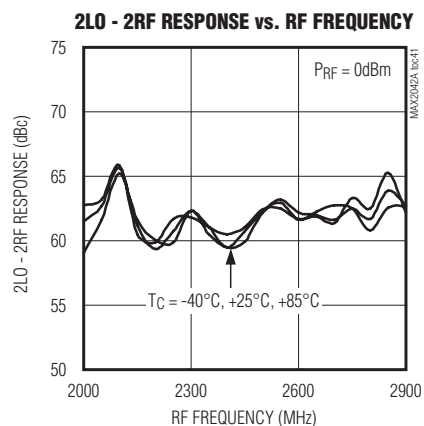
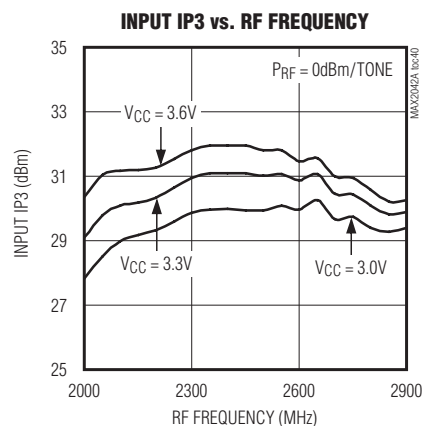
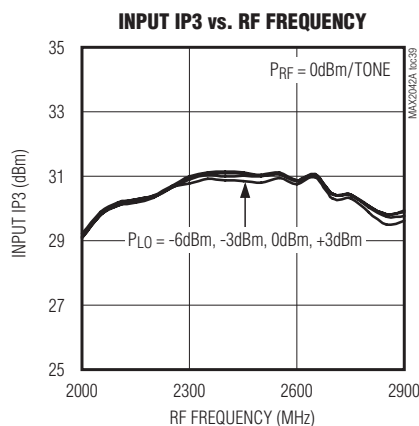
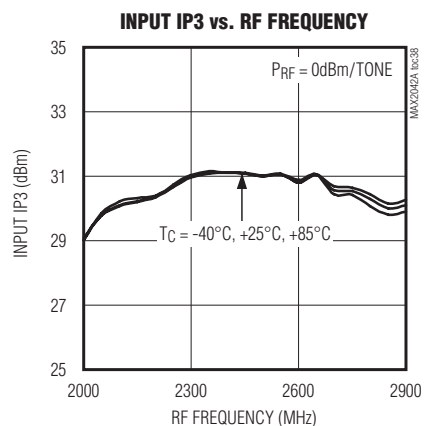
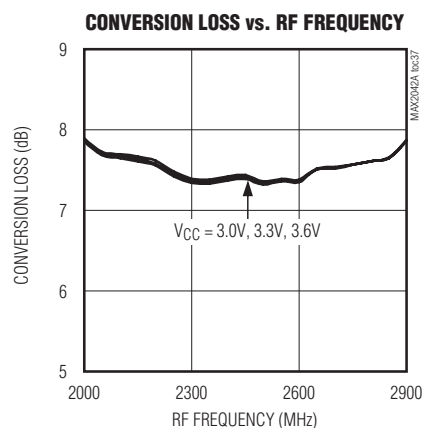
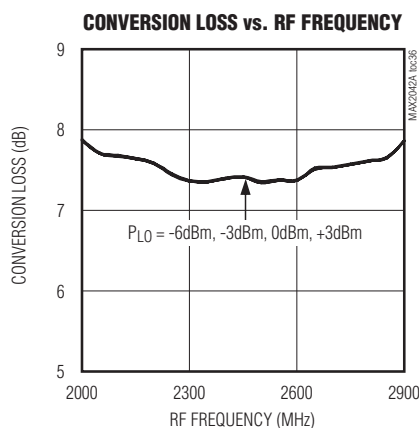
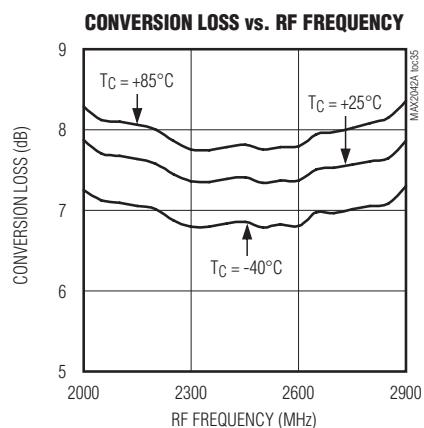


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 1,  $V_{CC} = 3.3V$ ,  $f_{RF} = 2000MHz$  to  $2900MHz$ , LO is high-side injected for a 300MHz IF,  $P_{RF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)

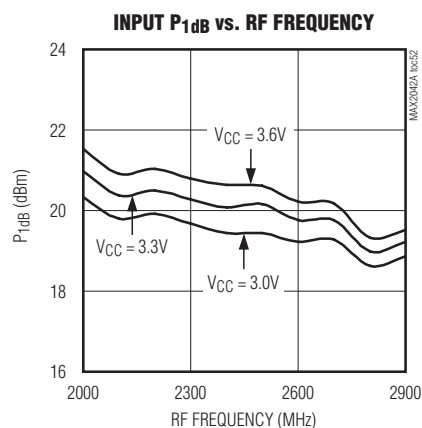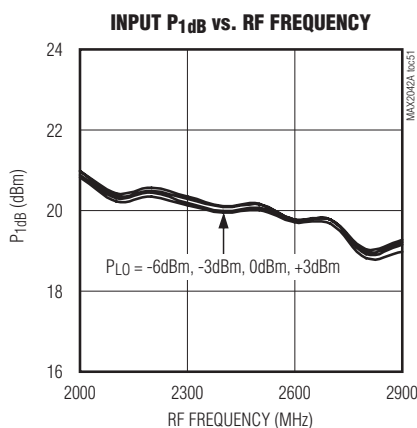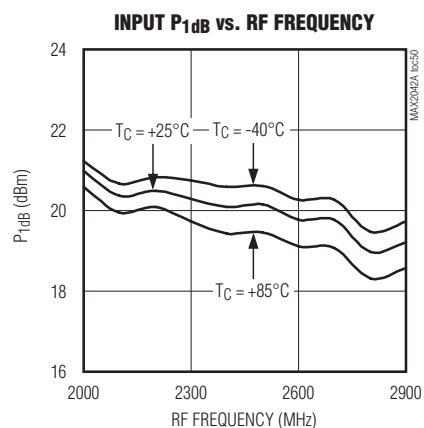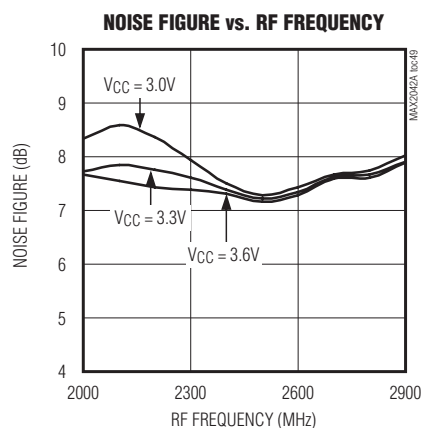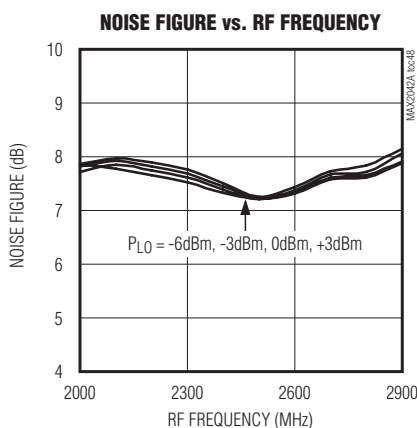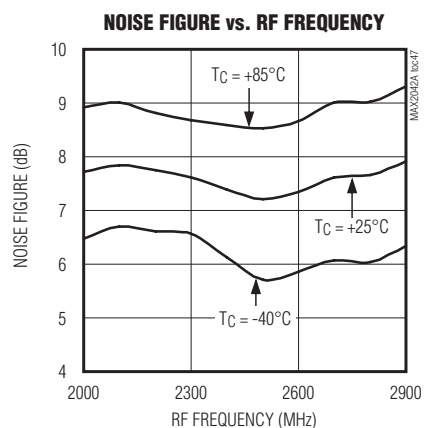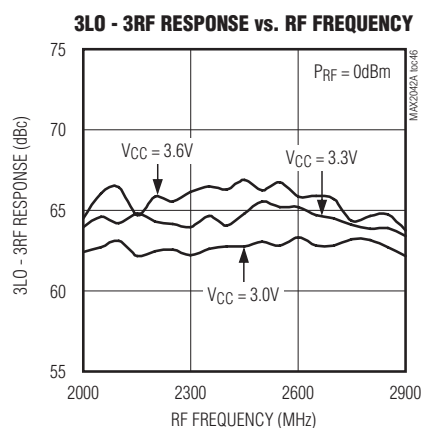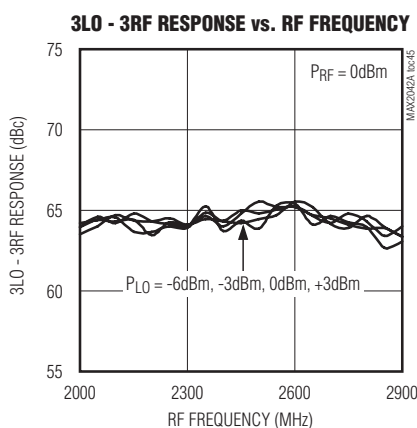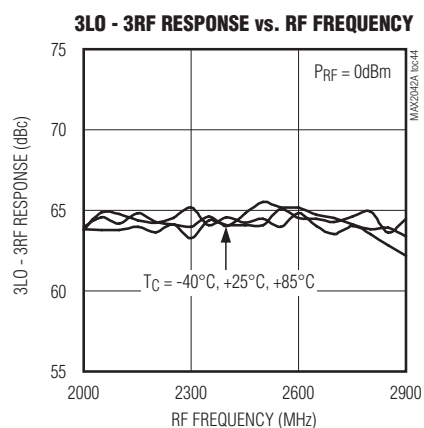


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer


### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 1,  $V_{CC} = 3.3V$ ,  $f_{RF} = 2000MHz$  to  $2900MHz$ , LO is high-side injected for a 300MHz IF,  $P_{RF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)


LO LEAKAGE AT IF PORT vs. LO FREQUENCY

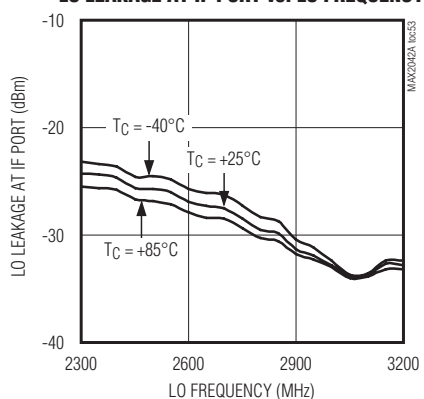


LO LEAKAGE AT IF PORT vs. LO FREQUENCY

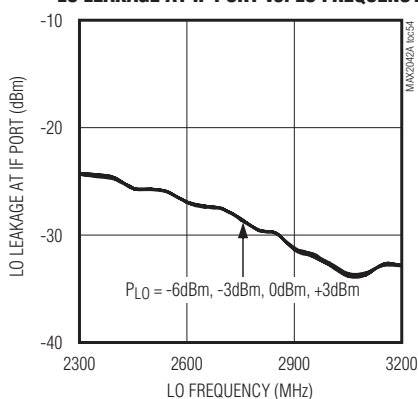


LO LEAKAGE AT IF PORT vs. LO FREQUENCY

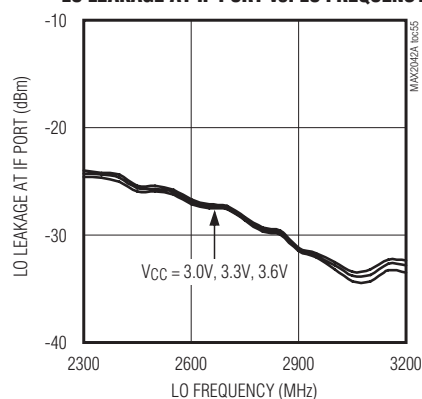


RF-TO-IF ISOLATION vs. RF FREQUENCY

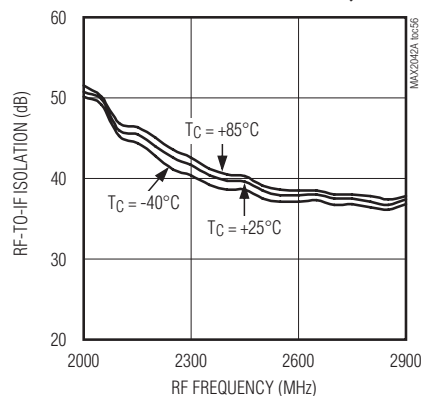


RF-TO-IF ISOLATION vs. RF FREQUENCY

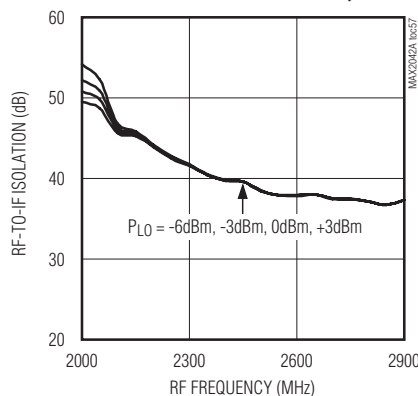


RF-TO-IF ISOLATION vs. RF FREQUENCY

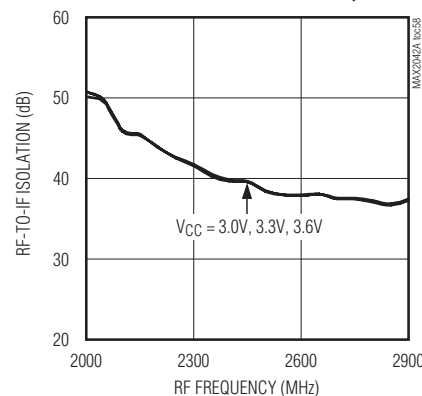


LO LEAKAGE AT RF PORT vs. LO FREQUENCY

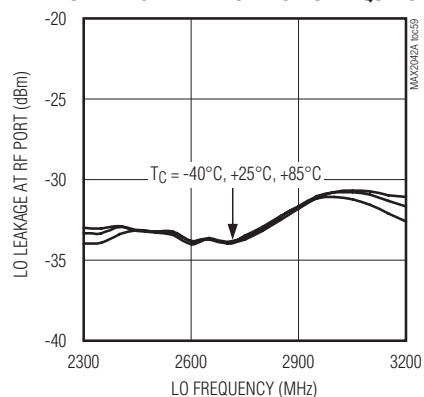

LO LEAKAGE AT RF PORT vs. LO FREQUENCY

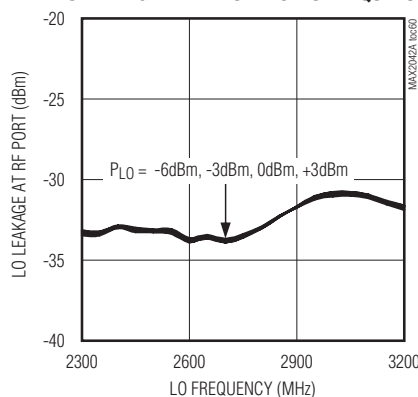

LO LEAKAGE AT RF PORT vs. LO FREQUENCY

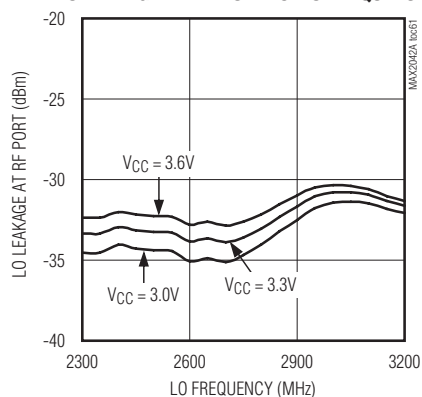


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 1,  $V_{CC} = 3.3V$ ,  $f_{RF} = 2000MHz$  to  $2900MHz$ , LO is high-side injected for a 300MHz IF,  $P_{RF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)

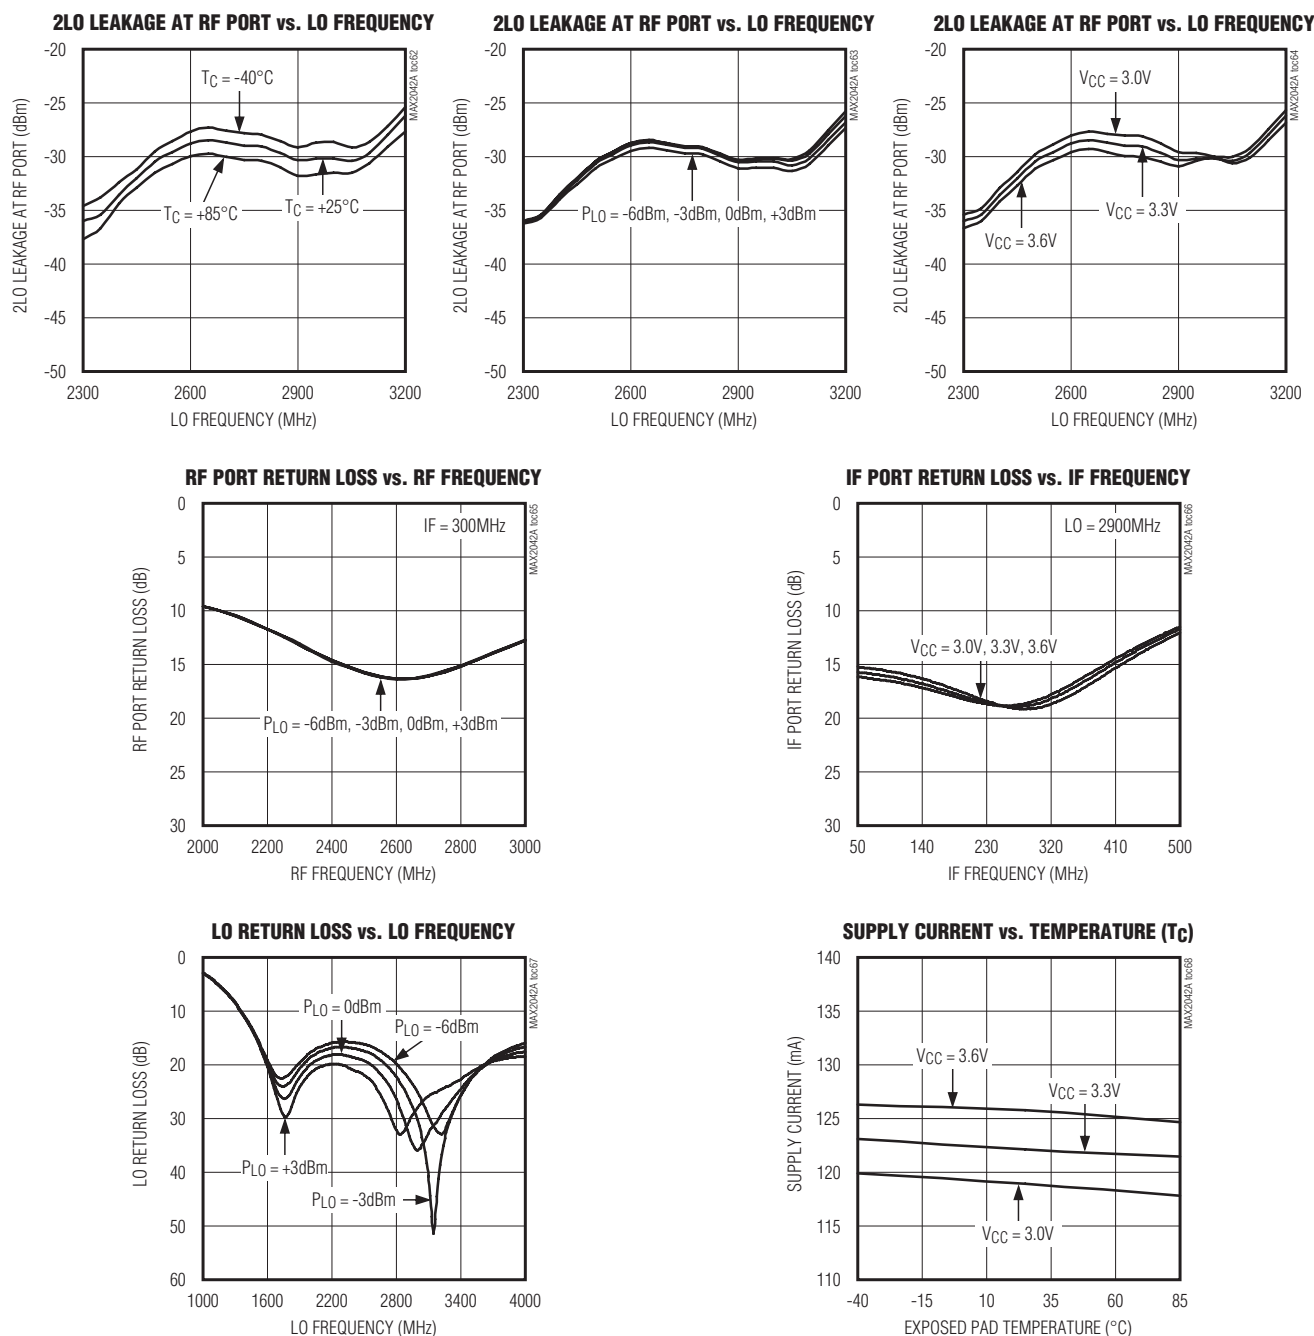


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 1,  $V_{CC} = 5.0V$ ,  $f_{RF} = 3100MHz$  to  $3900MHz$ , LO is low-side injected for a 300MHz IF,  $P_{RF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)









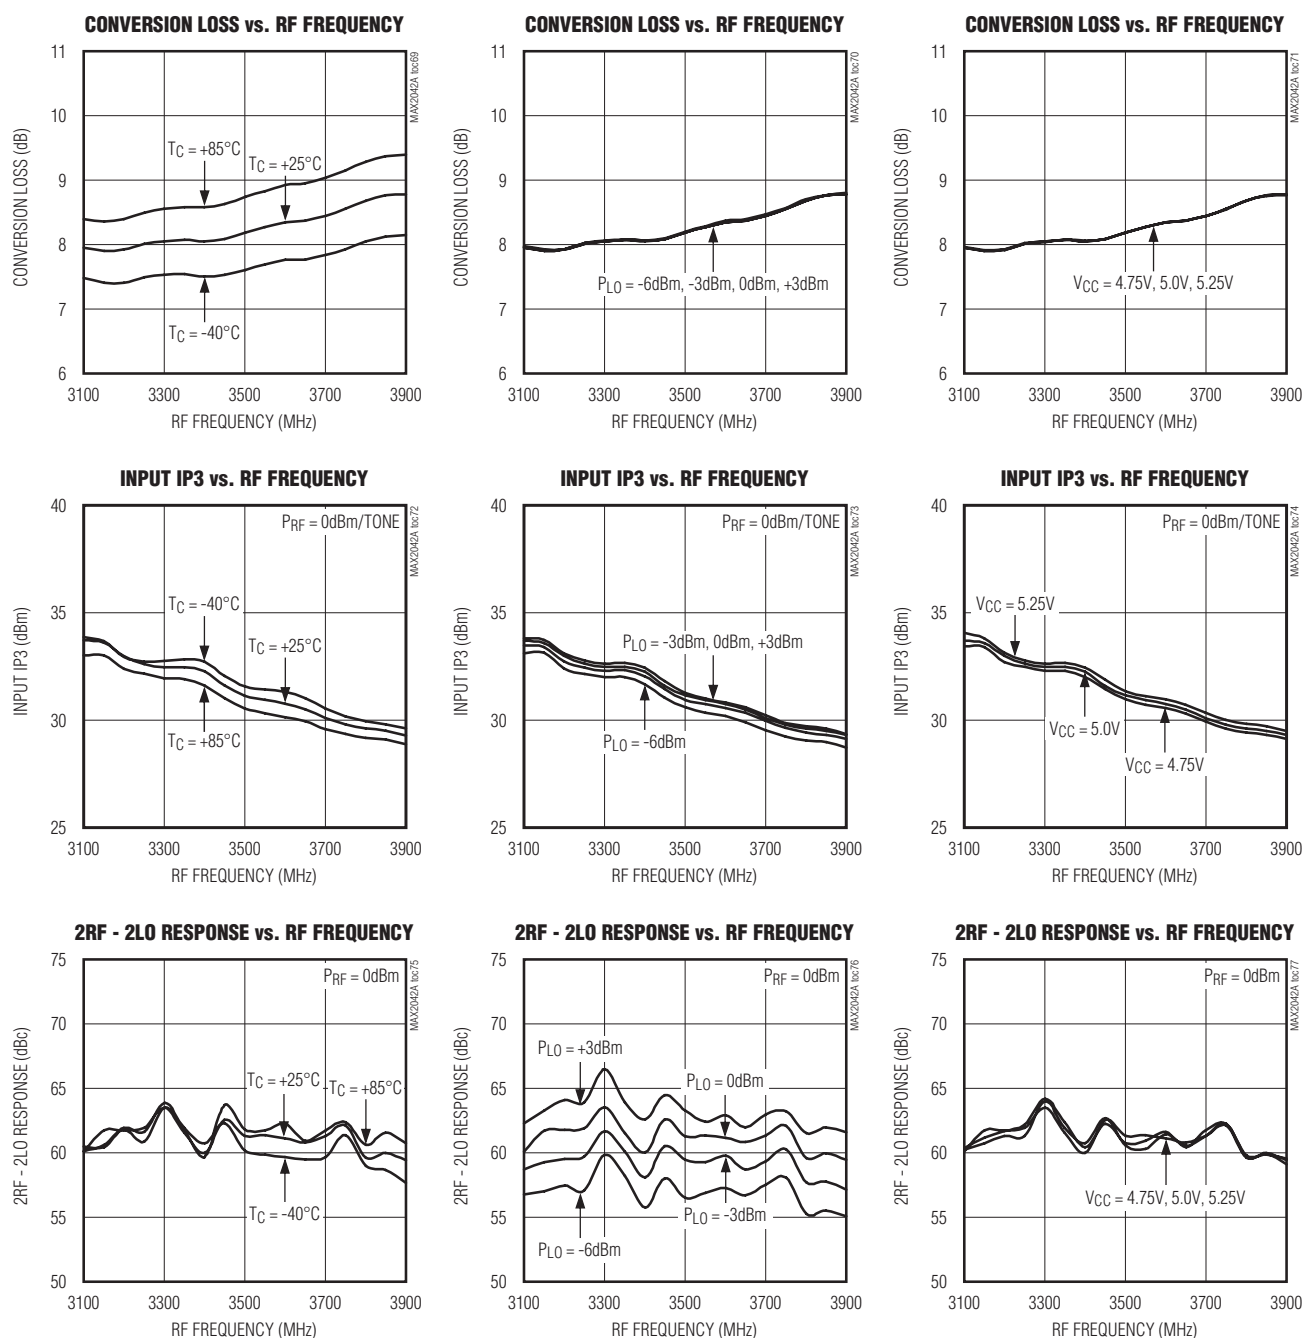


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 1,  $V_{CC} = 5.0V$ ,  $f_{RF} = 3100MHz$  to  $3900MHz$ , LO is low-side injected for a 300MHz IF,  $P_{RF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)

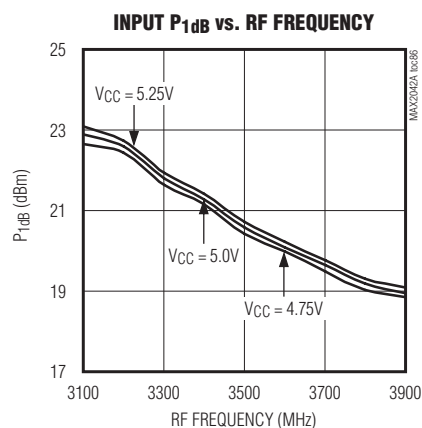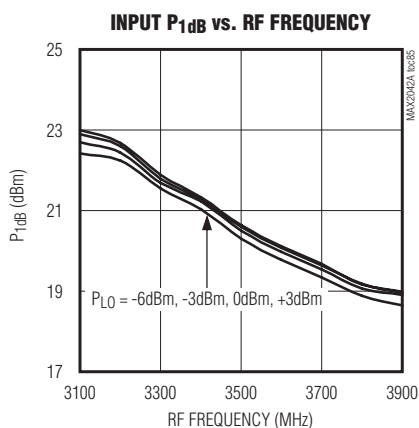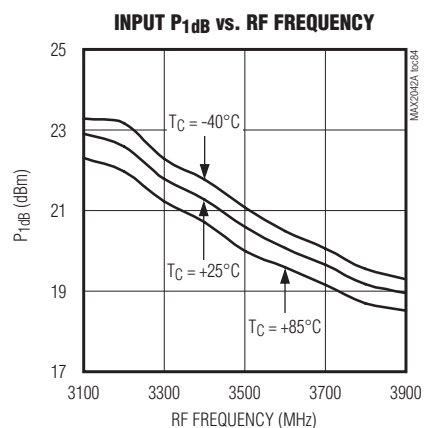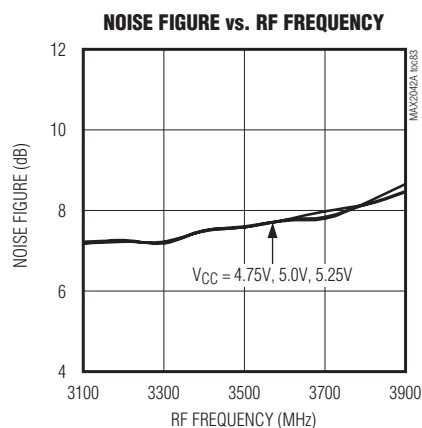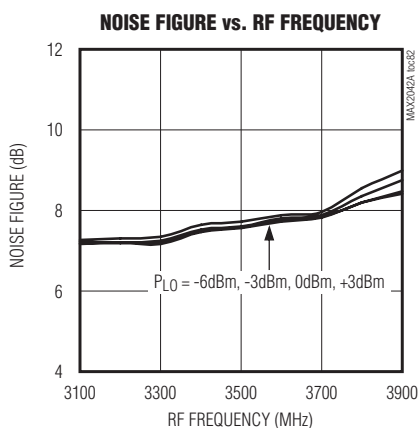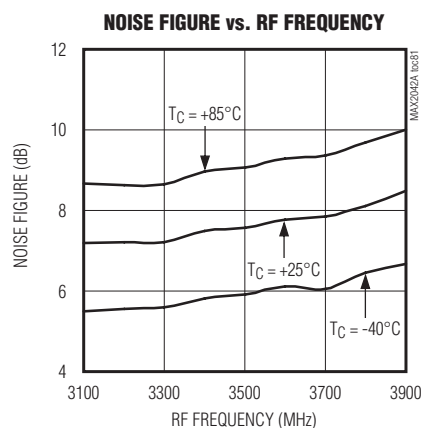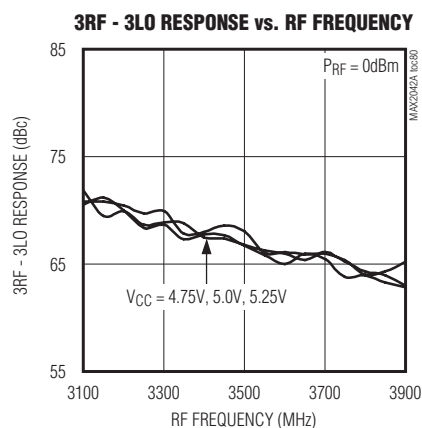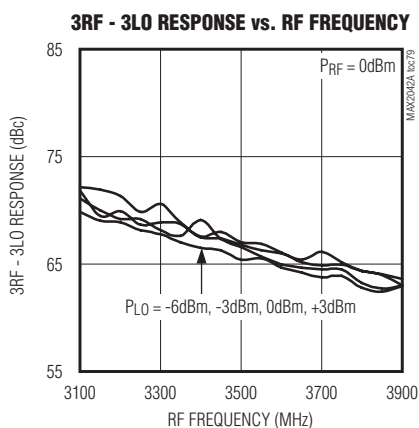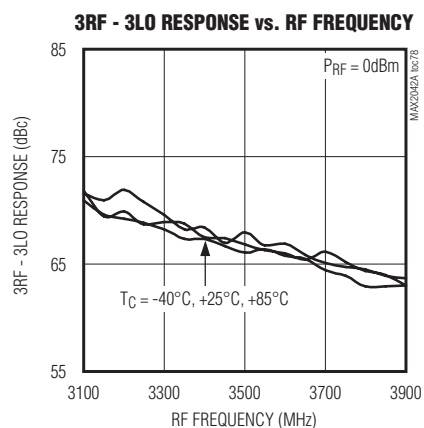


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 1,  $V_{CC} = 5.0V$ ,  $f_{RF} = 3100MHz$  to  $3900MHz$ , LO is low-side injected for a 300MHz IF,  $P_{RF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)

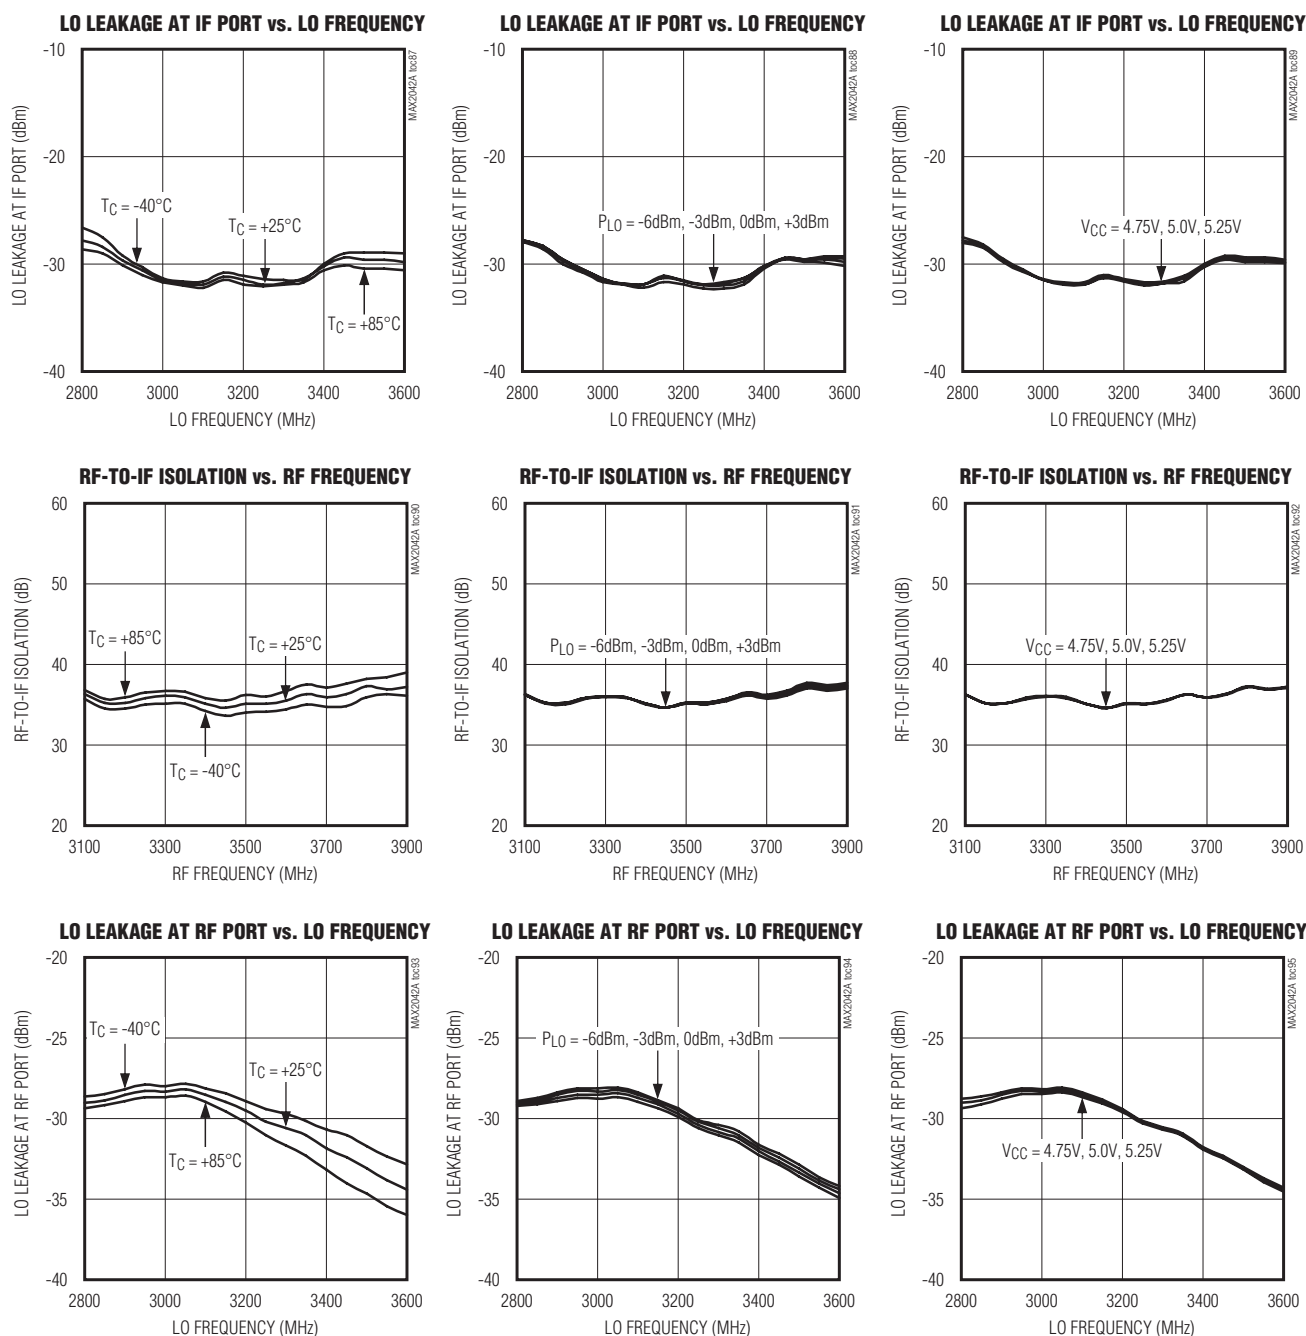


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 1,  $V_{CC} = 5.0V$ ,  $f_{RF} = 3100MHz$  to  $3900MHz$ , LO is low-side injected for a 300MHz IF,  $P_{RF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)









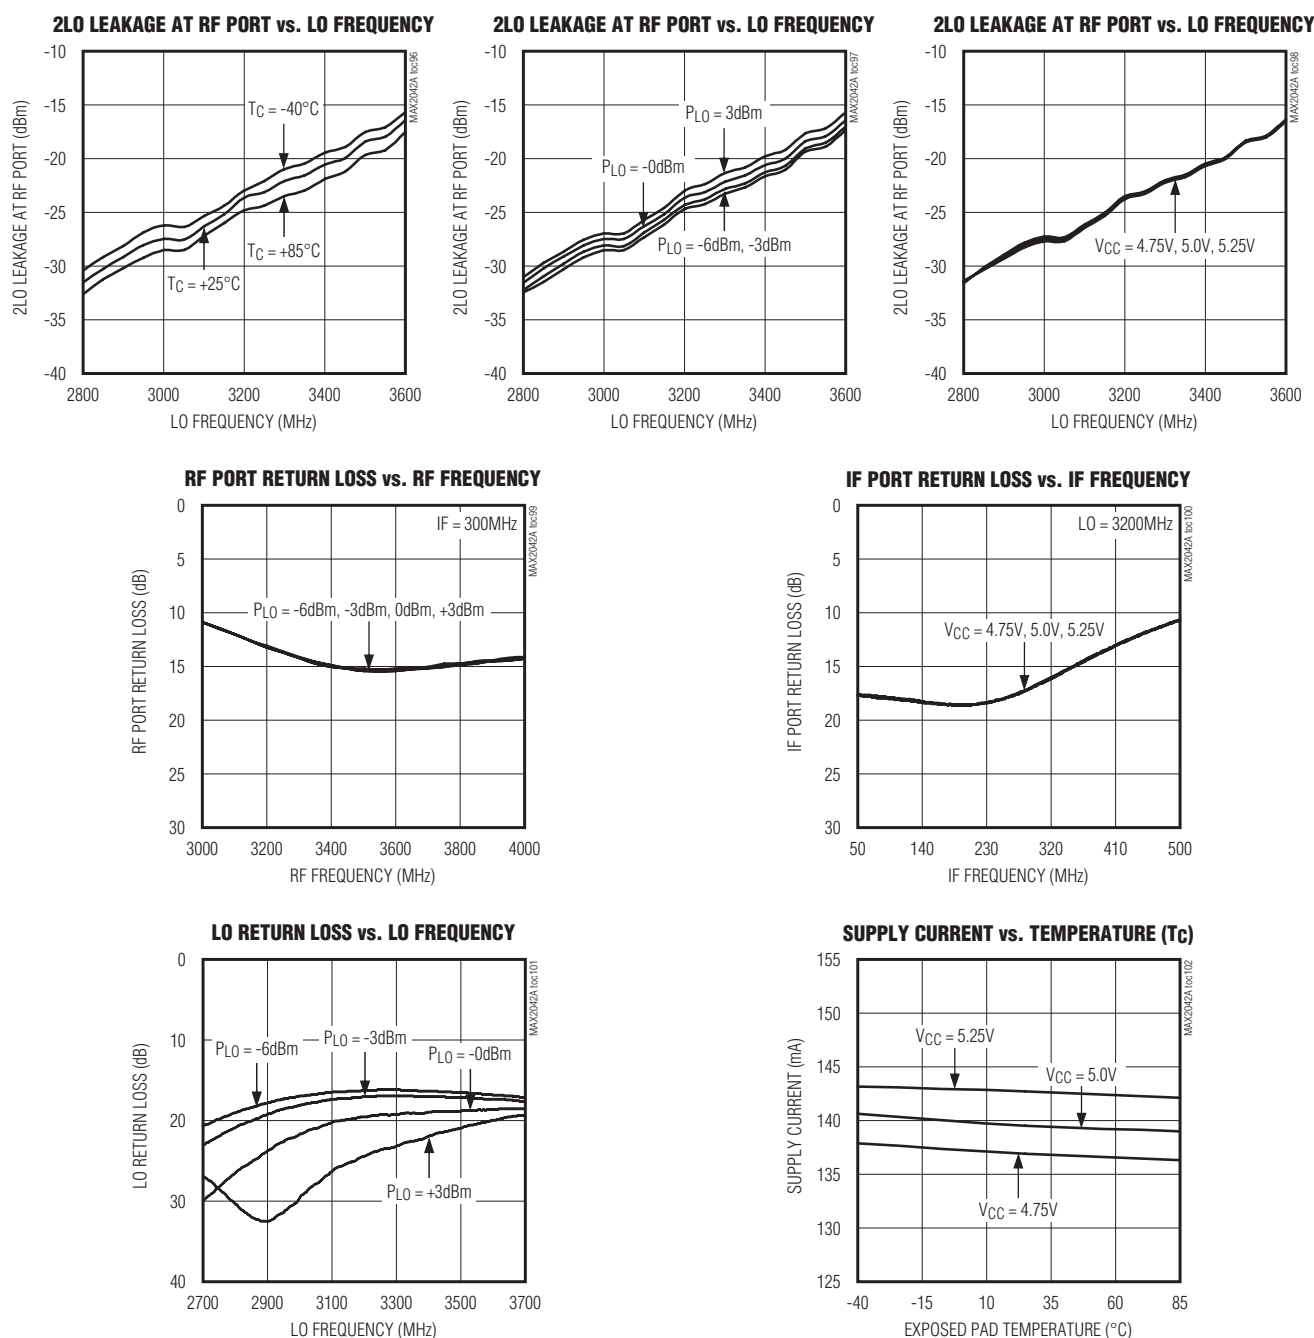


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 1,  $V_{CC} = 5.0V$ ,  $f_{RF} = 3100MHz$  to  $3900MHz$ , LO is high-side injected for a 300MHz IF,  $P_{RF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)

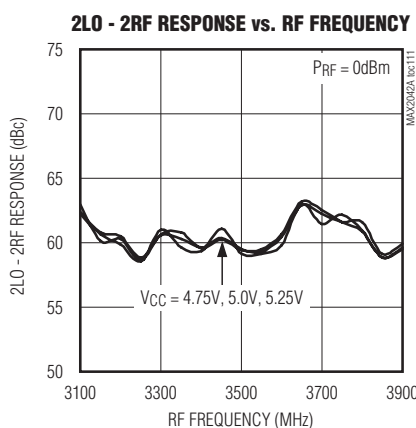
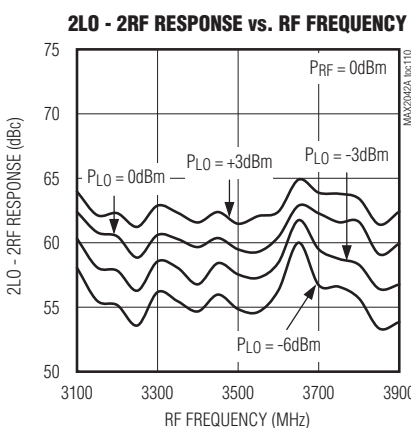
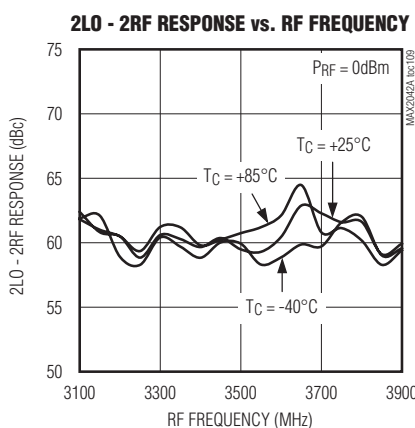
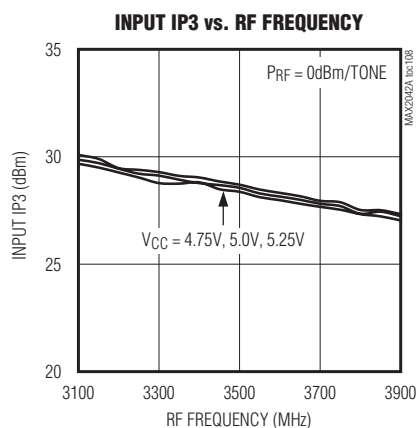
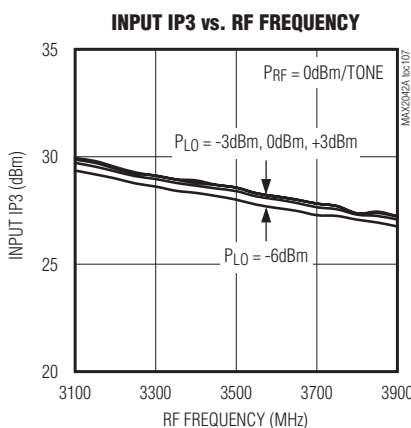
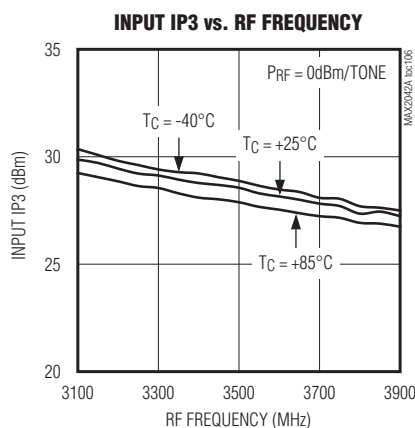
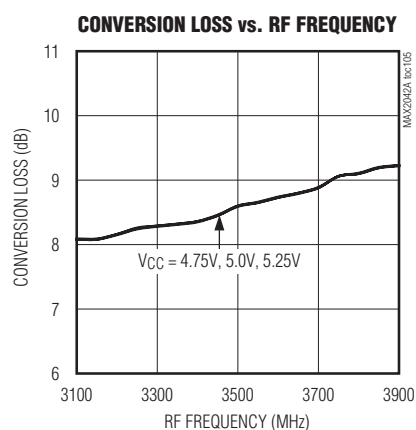
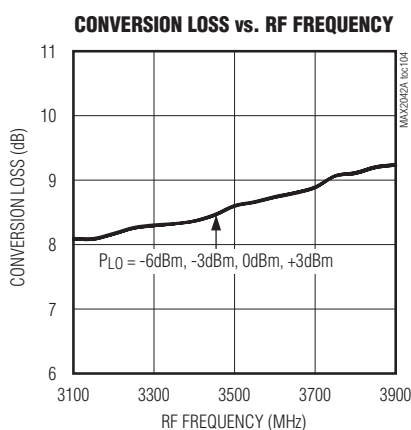
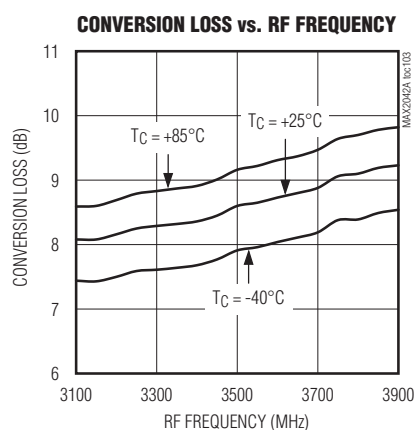


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 1,  $V_{CC} = 5.0V$ ,  $f_{RF} = 3100MHz$  to  $3900MHz$ , LO is high-side injected for a 300MHz IF,  $P_{RF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)

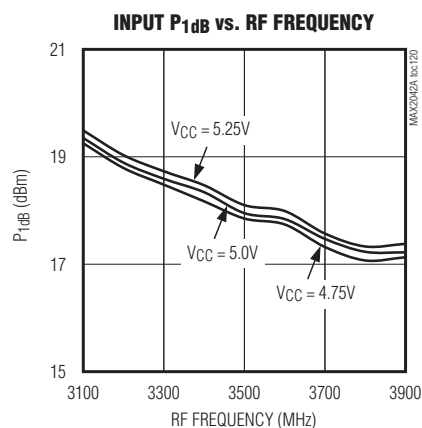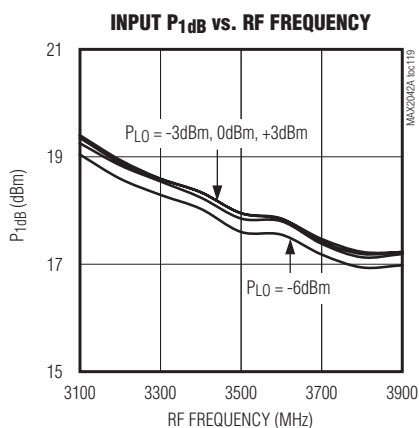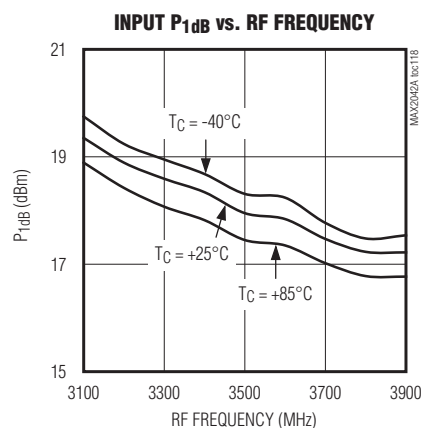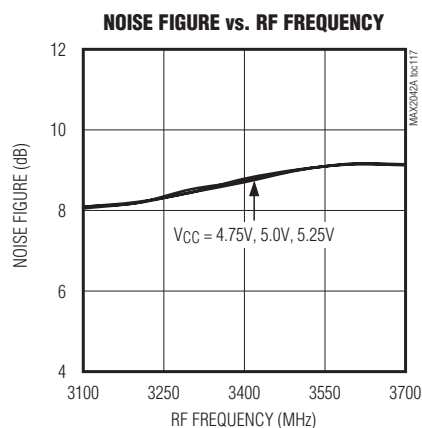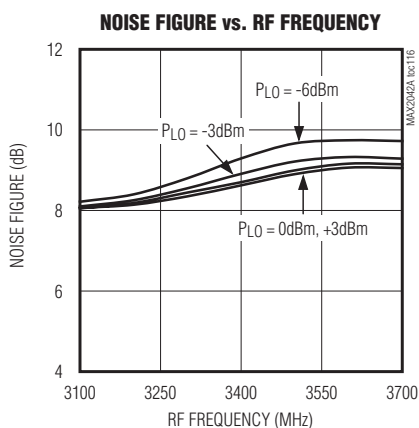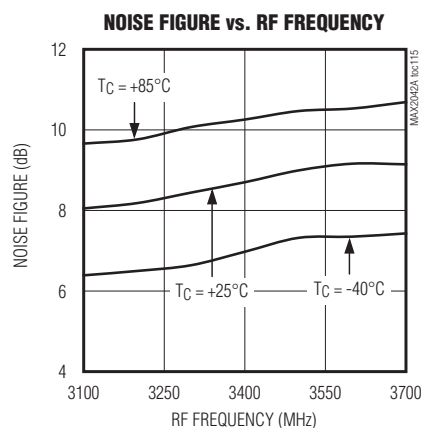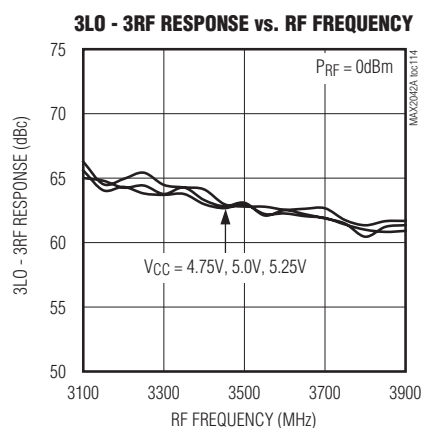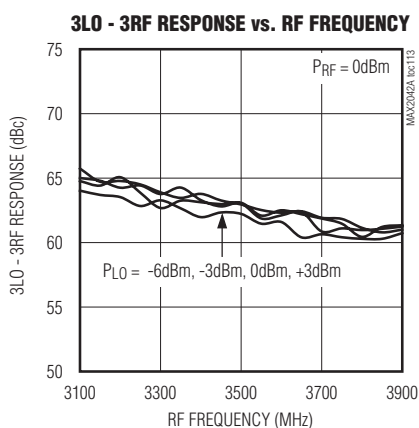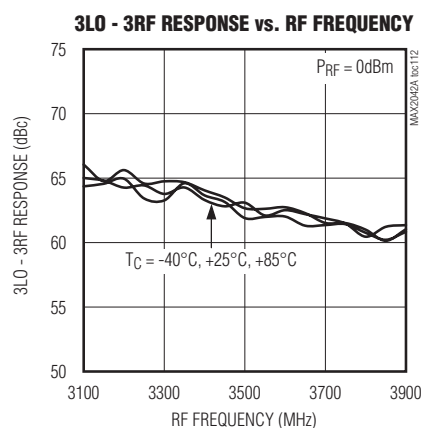


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer


### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 1,  $V_{CC} = 5.0V$ ,  $f_{RF} = 3100MHz$  to  $3900MHz$ , LO is high-side injected for a 300MHz IF,  $P_{RF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)


LO LEAKAGE AT IF PORT vs. LO FREQUENCY

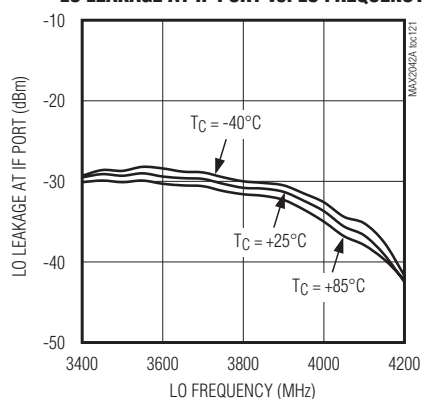


LO LEAKAGE AT IF PORT vs. LO FREQUENCY

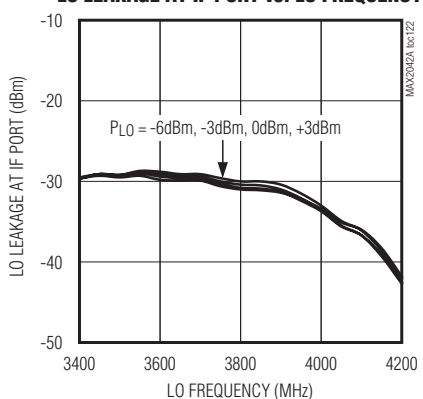


LO LEAKAGE AT IF PORT vs. LO FREQUENCY

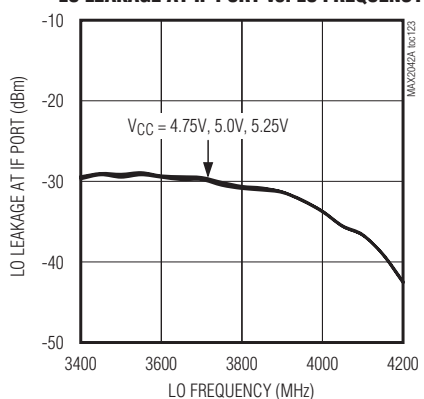


RF-TO-IF ISOLATION vs. RF FREQUENCY

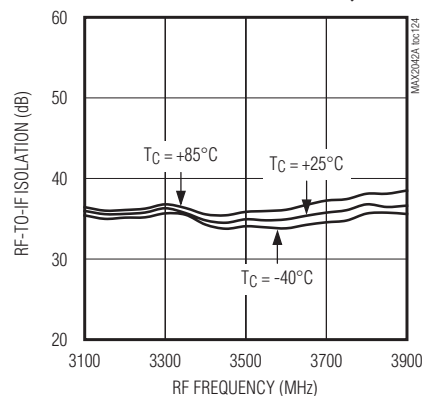


RF-TO-IF ISOLATION vs. RF FREQUENCY

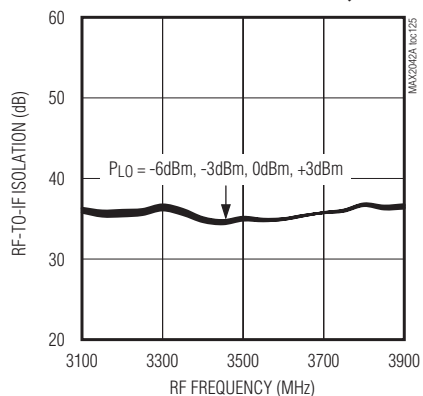


RF-TO-IF ISOLATION vs. RF FREQUENCY

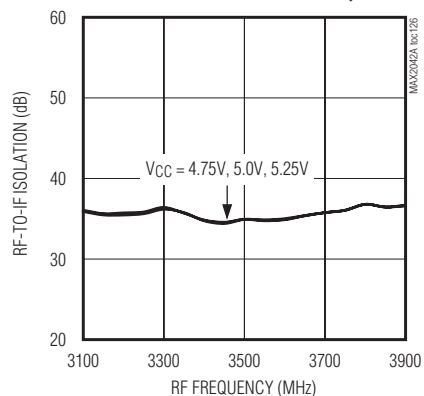


LO LEAKAGE AT RF PORT vs. LO FREQUENCY

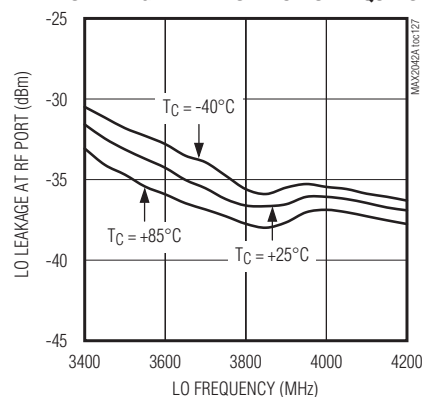

LO LEAKAGE AT RF PORT vs. LO FREQUENCY

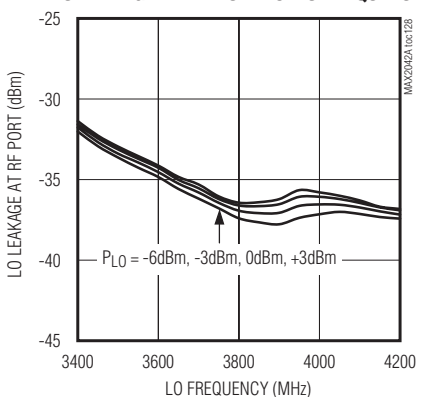

LO LEAKAGE AT RF PORT vs. LO FREQUENCY

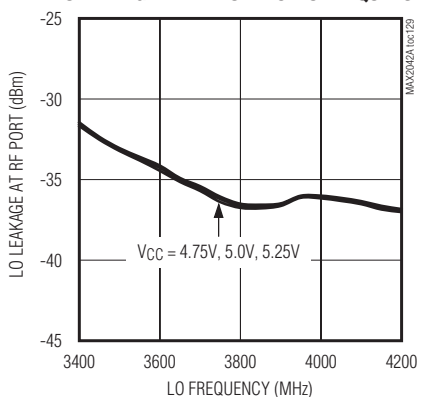


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer


### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 1,  $V_{CC} = 5.0V$ ,  $f_{RF} = 3100MHz$  to  $3900MHz$ , LO is high-side injected for a 300MHz IF,  $P_{RF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)


2LO LEAKAGE AT RF PORT vs. LO FREQUENCY

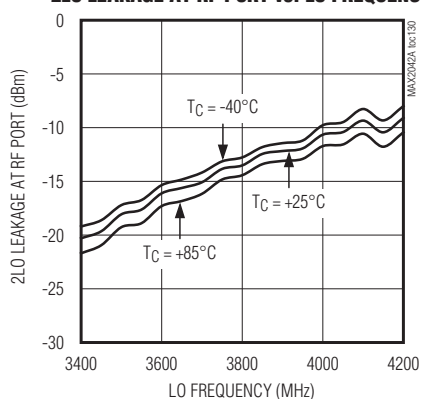


2LO LEAKAGE AT RF PORT vs. LO FREQUENCY

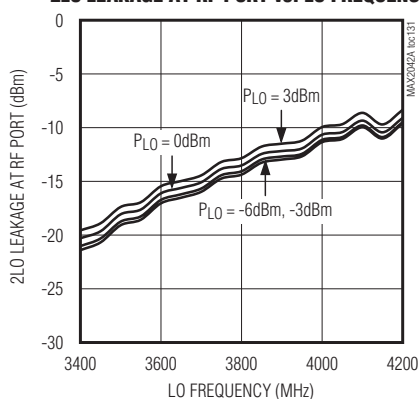


2LO LEAKAGE AT RF PORT vs. LO FREQUENCY

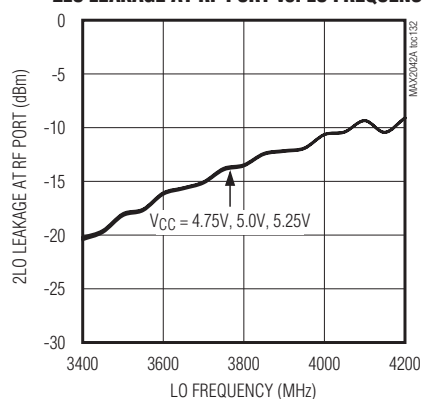


RF PORT RETURN LOSS vs. RF FREQUENCY

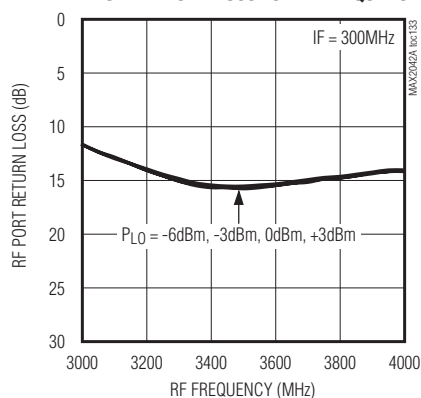


IF PORT RETURN LOSS vs. IF FREQUENCY

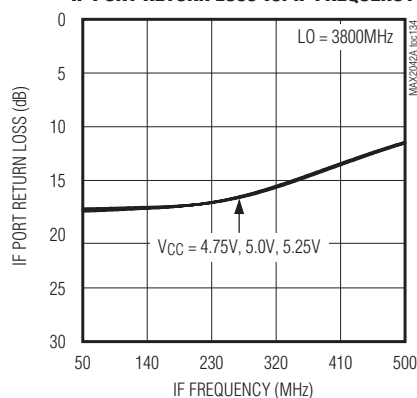

LO RETURN LOSS vs. LO FREQUENCY

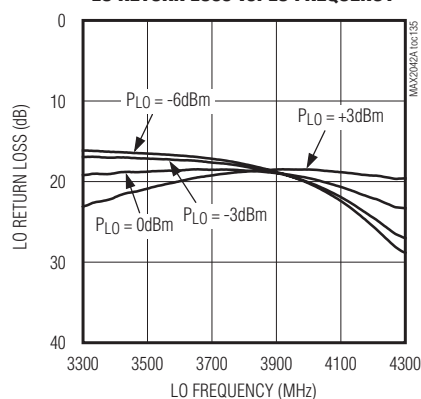

SUPPLY CURRENT vs. TEMPERATURE ( $T_C$ )









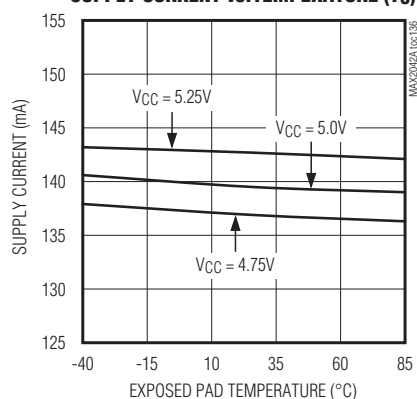


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 1,  $V_{CC} = 5.0V$ ,  $f_{RF} = 1650MHz$  to  $2250MHz$ , LO is high-side injected for a 300MHz IF,  $P_{RF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)

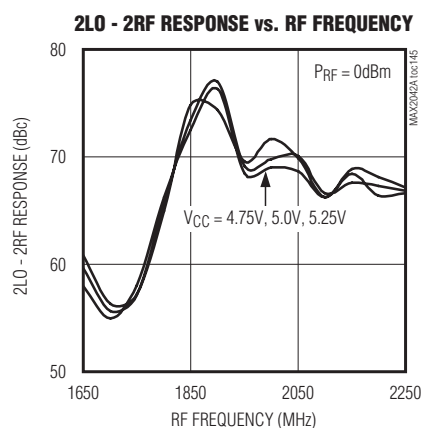
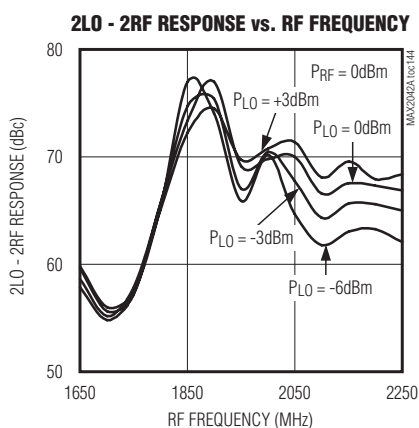
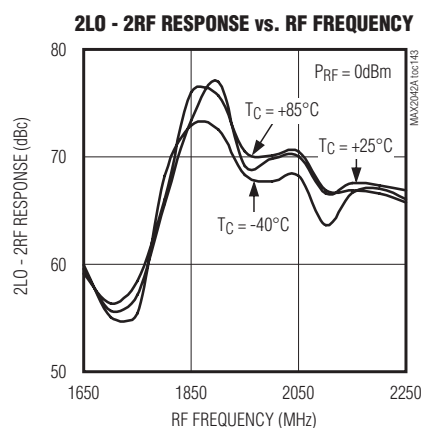
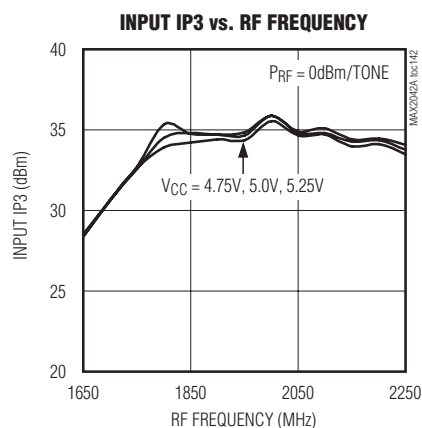
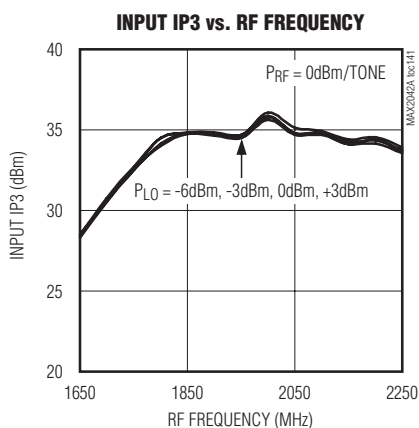
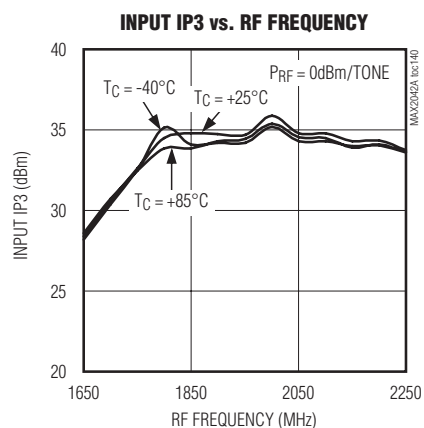
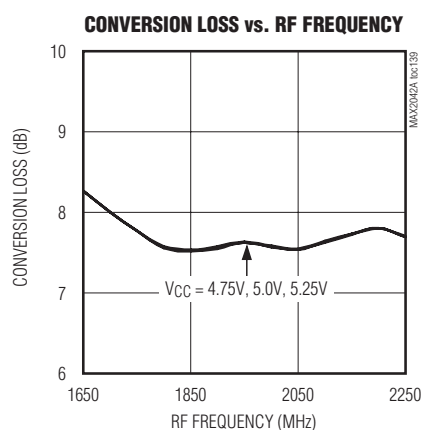
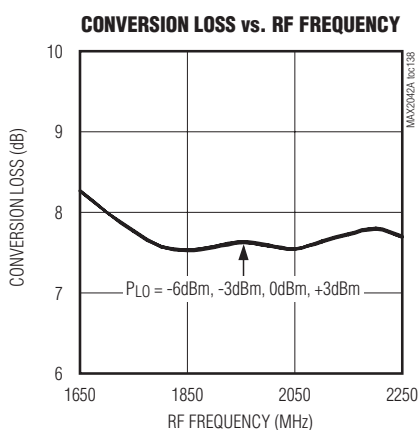
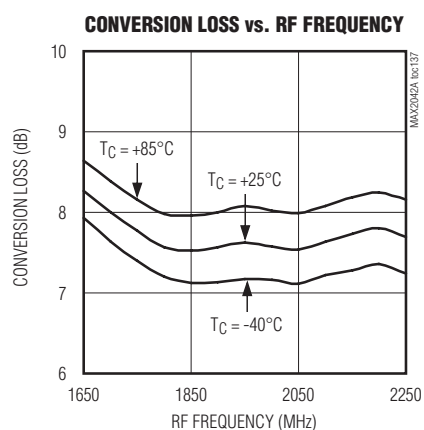


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 1,  $V_{CC} = 5.0V$ ,  $f_{RF} = 1650MHz$  to  $2250MHz$ , LO is high-side injected for a 300MHz IF,  $P_{RF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)

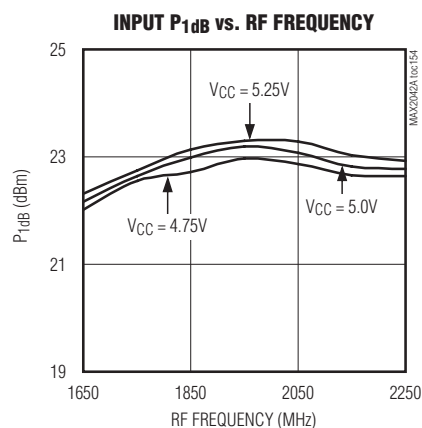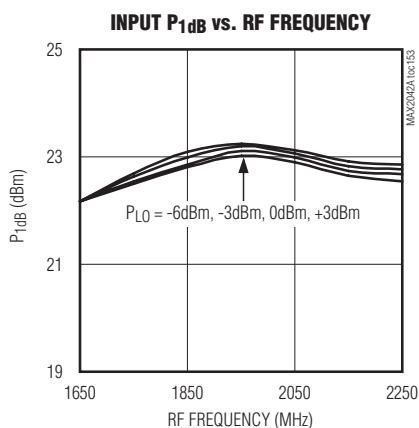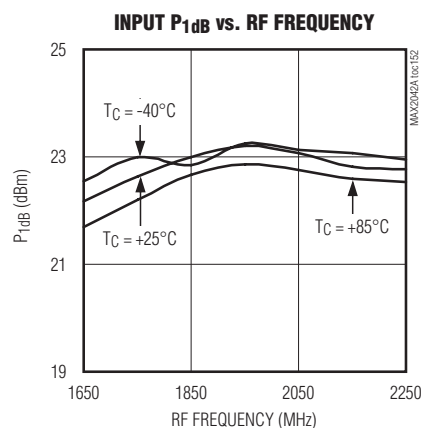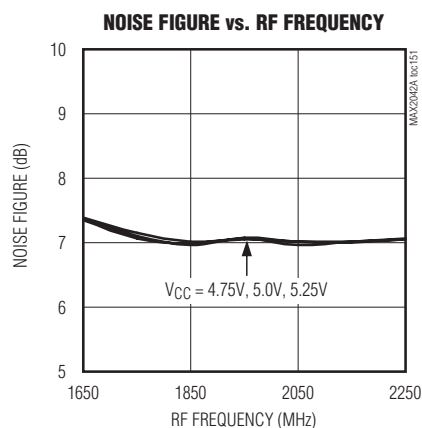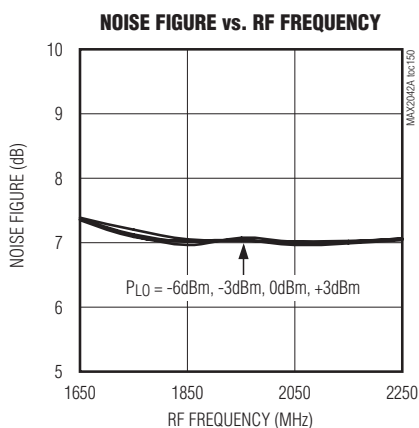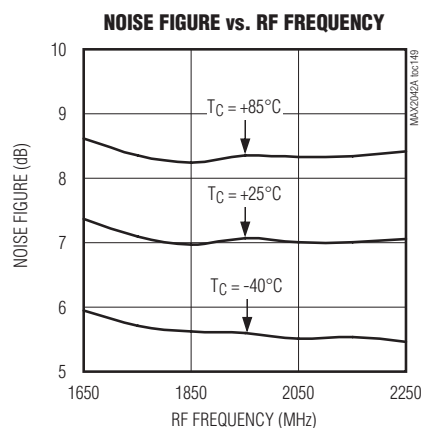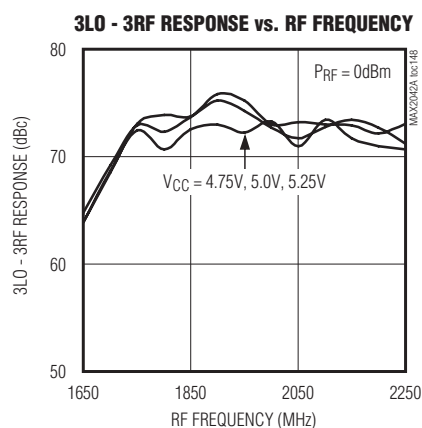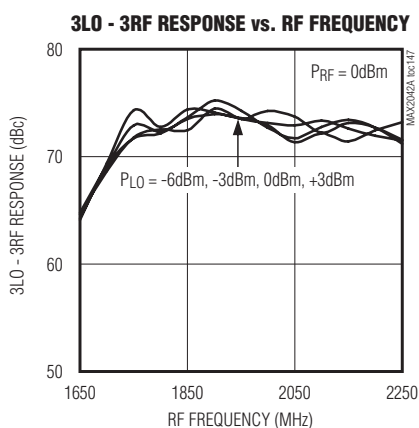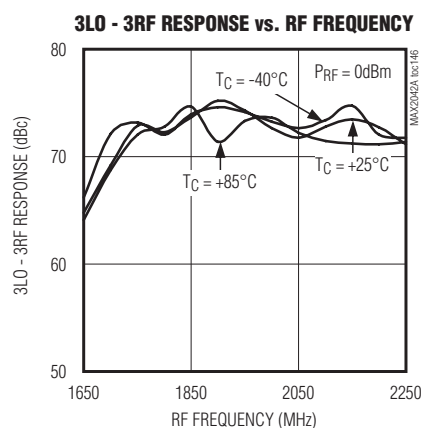


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer


### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 1,  $V_{CC} = 5.0V$ ,  $f_{RF} = 1650MHz$  to  $2250MHz$ , LO is high-side injected for a 300MHz IF,  $P_{RF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)


LO LEAKAGE AT IF PORT vs. LO FREQUENCY

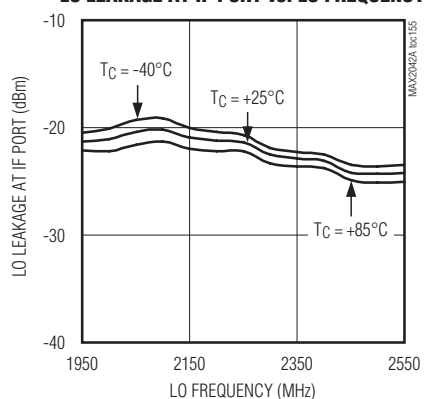


LO LEAKAGE AT IF PORT vs. LO FREQUENCY

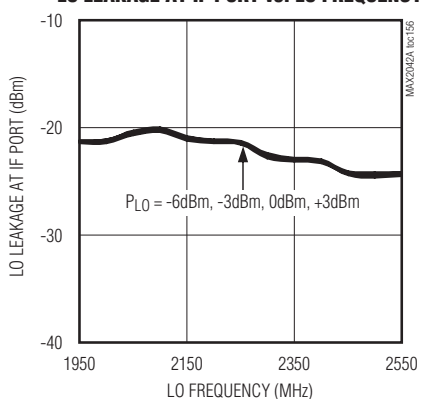


LO LEAKAGE AT IF PORT vs. LO FREQUENCY

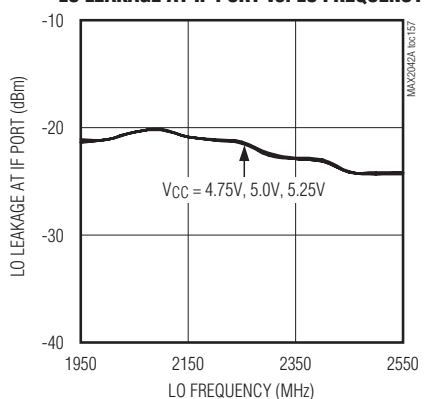


RF-TO-IF ISOLATION vs. RF FREQUENCY

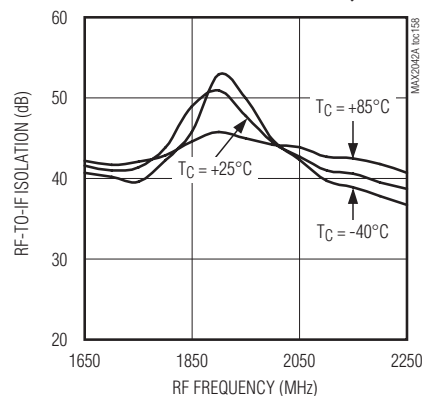


RF-TO-IF ISOLATION vs. RF FREQUENCY

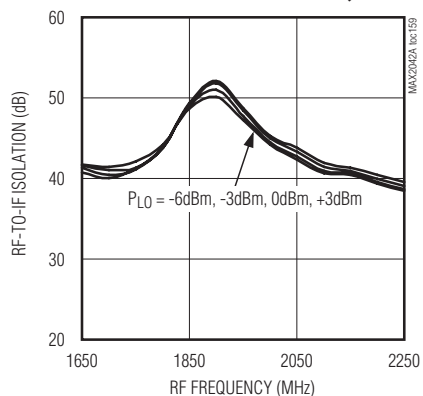


RF-TO-IF ISOLATION vs. RF FREQUENCY

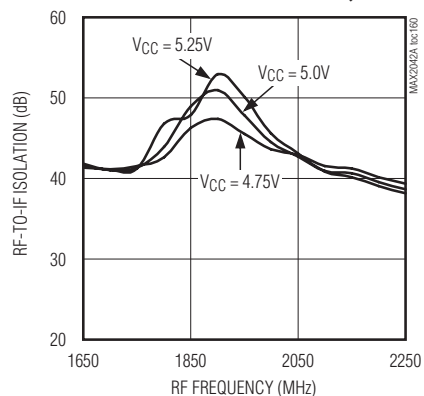


LO LEAKAGE AT RF PORT vs. LO FREQUENCY

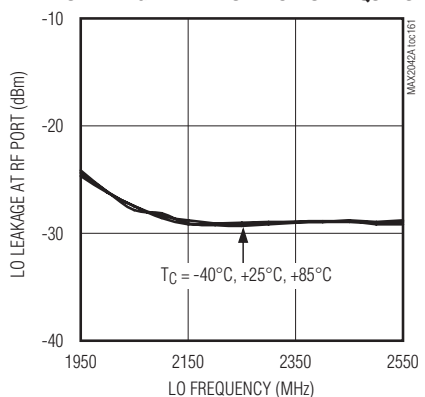

LO LEAKAGE AT RF PORT vs. LO FREQUENCY

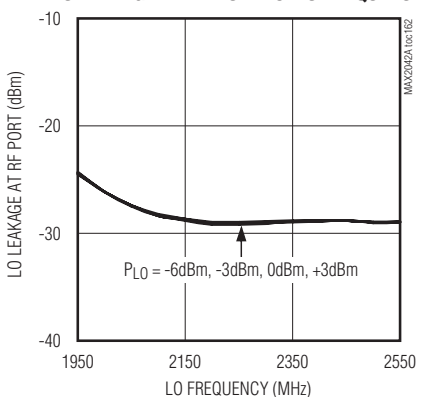

LO LEAKAGE AT RF PORT vs. LO FREQUENCY

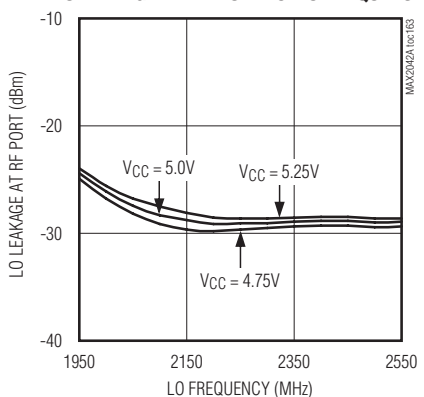


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 1,  $V_{CC} = 5.0V$ ,  $f_{RF} = 1650MHz$  to  $2250MHz$ , LO is high-side injected for a 300MHz IF,  $P_{RF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)

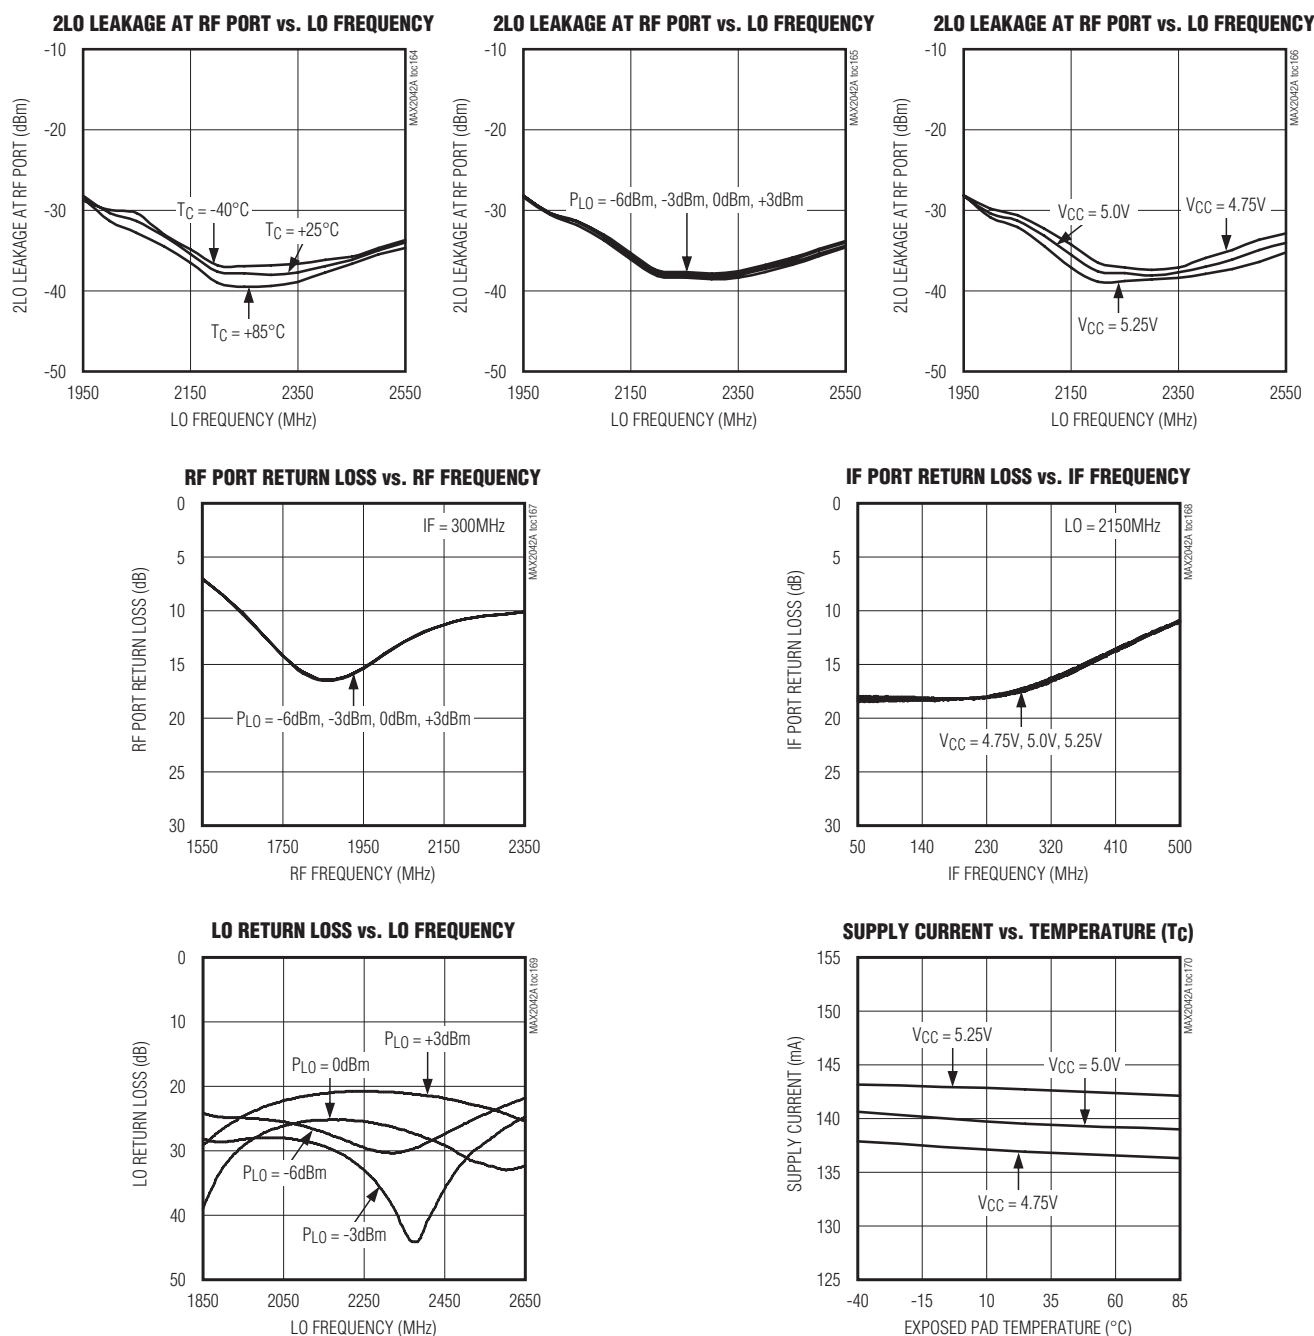


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 1,  $V_{CC} = 5.0V$ ,  $f_{RF} = 1650MHz$  to  $2250MHz$ , LO is low-side injected for a 300MHz IF,  $P_{RF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)









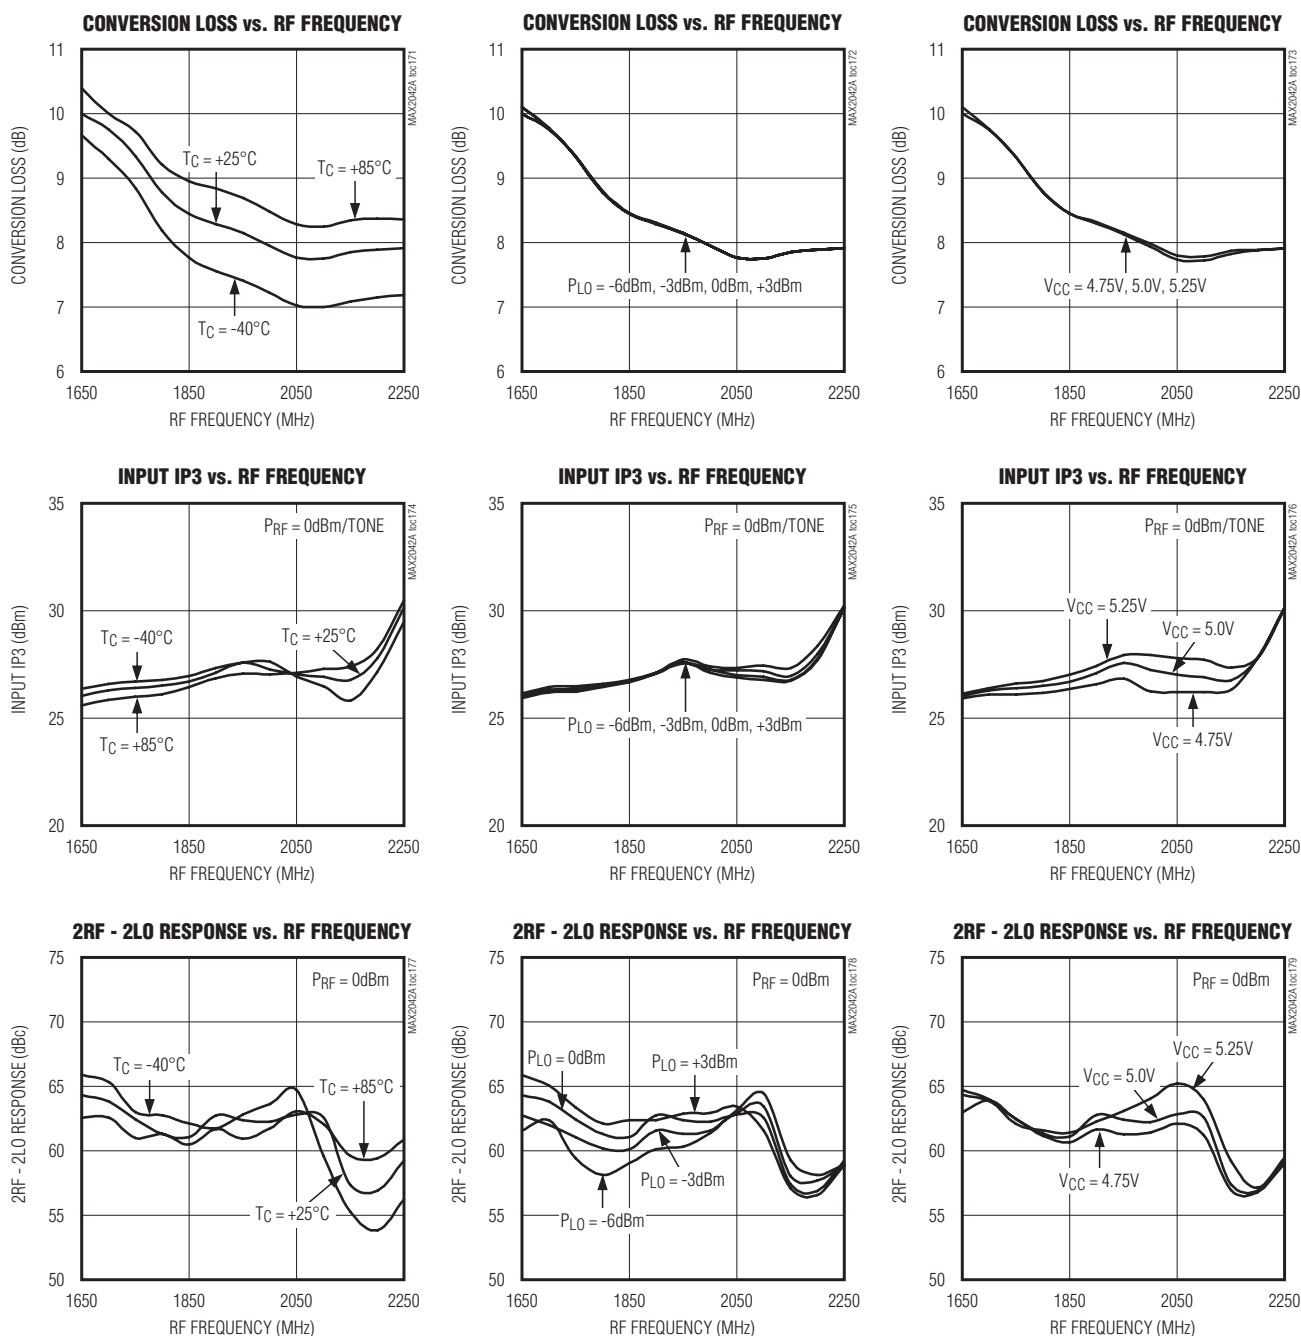


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 1,  $V_{CC} = 5.0V$ ,  $f_{RF} = 1650MHz$  to  $2250MHz$ , LO is low-side injected for a 300MHz IF,  $P_{RF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)

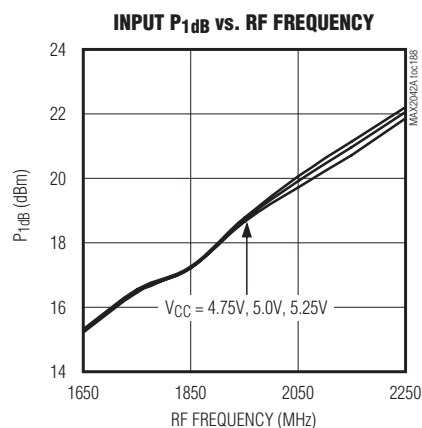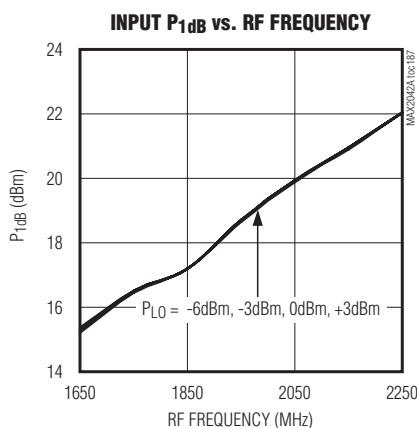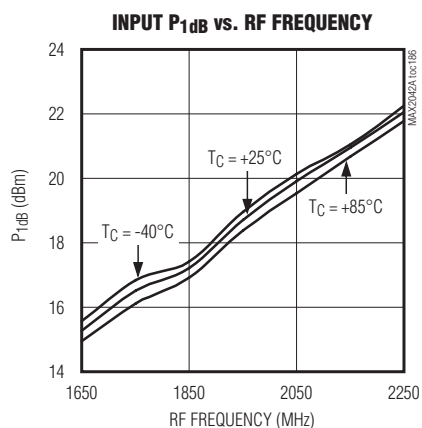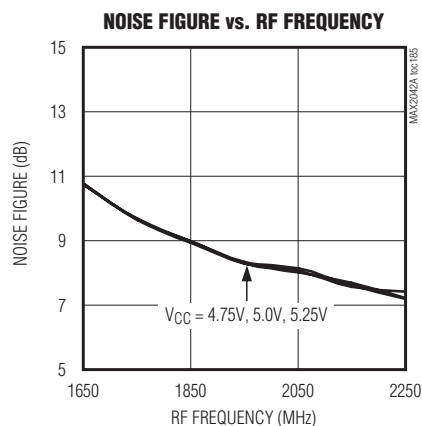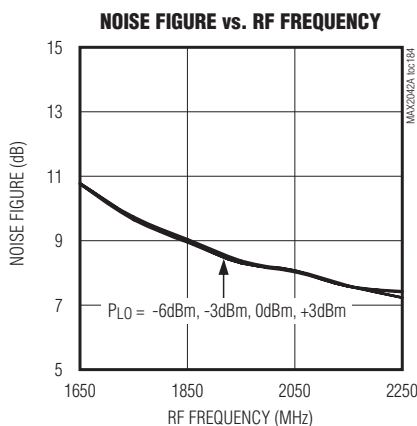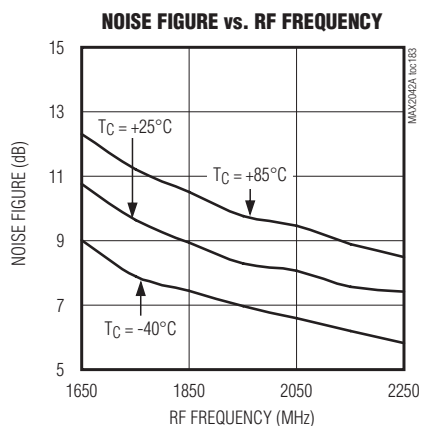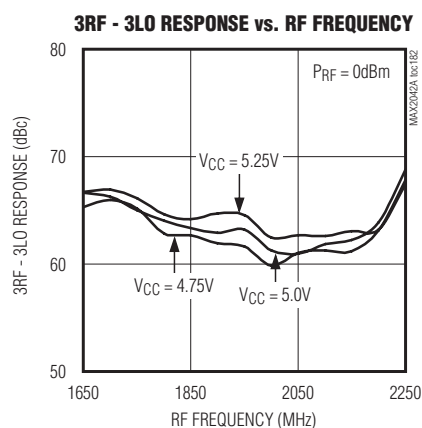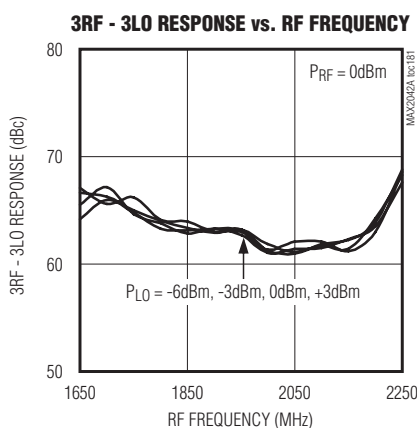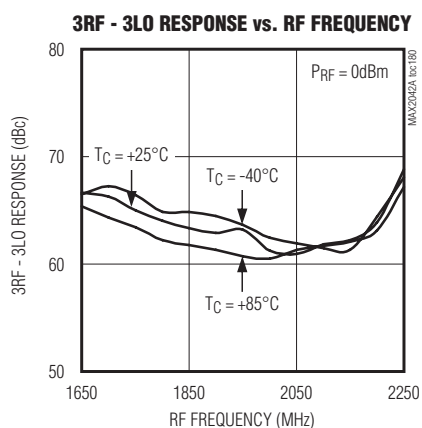


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 1,  $V_{CC} = 5.0V$ ,  $f_{RF} = 1650MHz$  to  $2250MHz$ , LO is low-side injected for a 300MHz IF,  $P_{RF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)

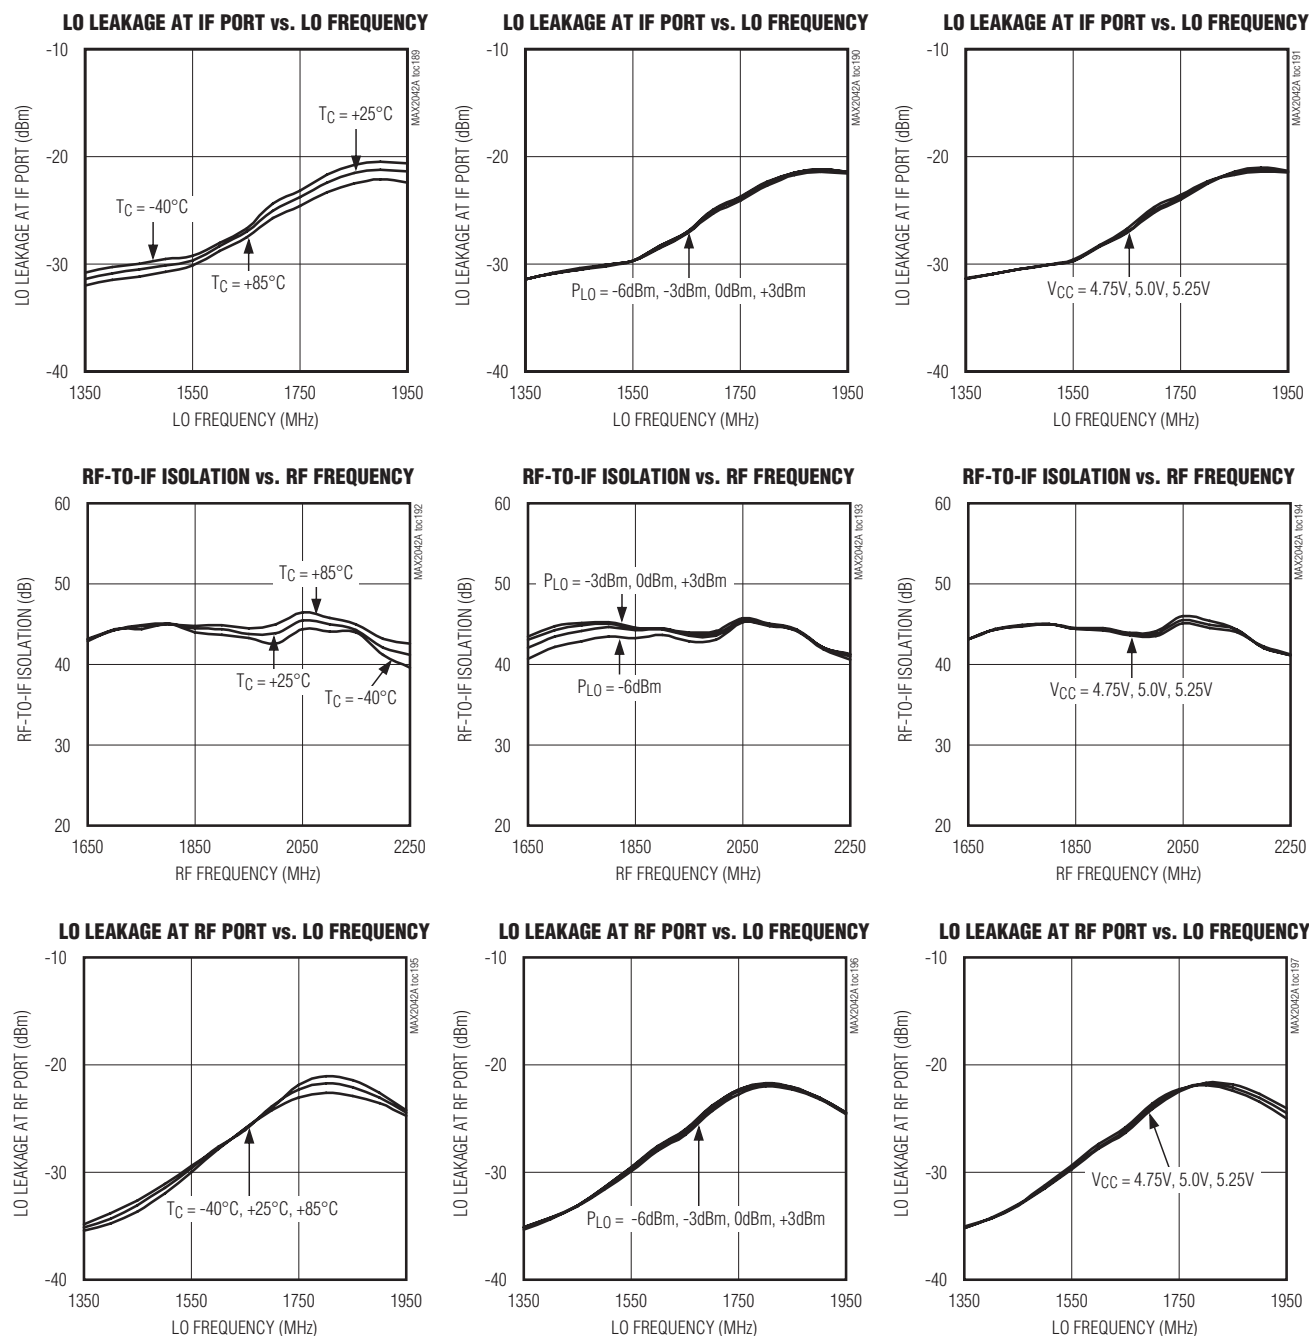


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer


### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 1,  $V_{CC} = 5.0V$ ,  $f_{RF} = 1650MHz$  to  $2250MHz$ , LO is low-side injected for a 300MHz IF,  $P_{RF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)


2LO LEAKAGE AT RF PORT vs. LO FREQUENCY

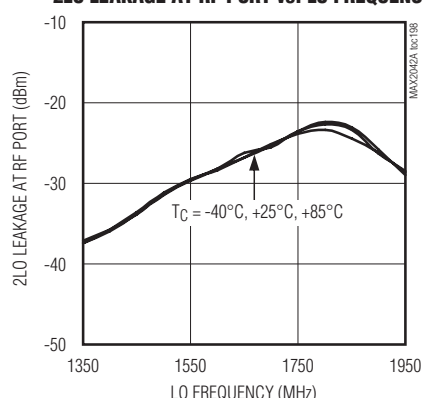


2LO LEAKAGE AT RF PORT vs. LO FREQUENCY

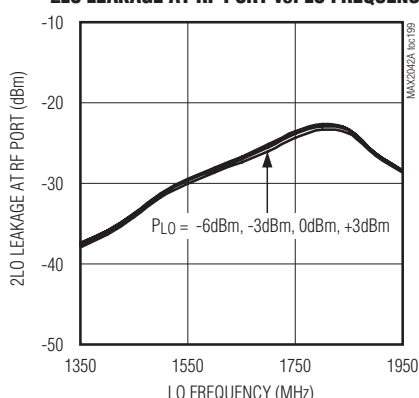


2LO LEAKAGE AT RF PORT vs. LO FREQUENCY

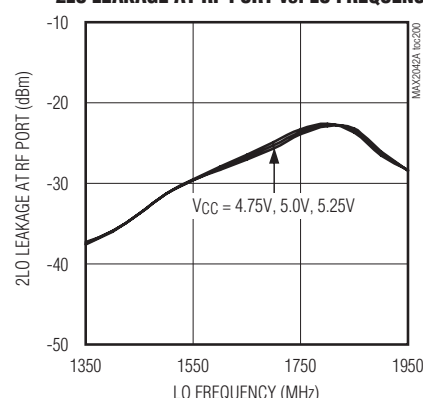


RF PORT RETURN LOSS vs. RF FREQUENCY

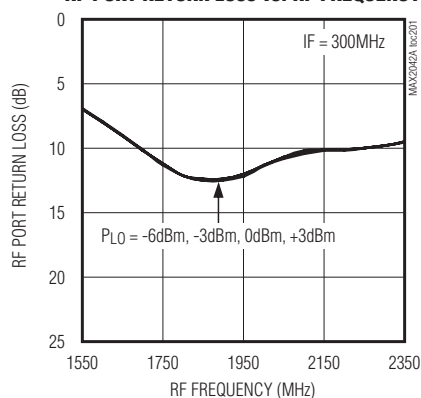


IF PORT RETURN LOSS vs. IF FREQUENCY

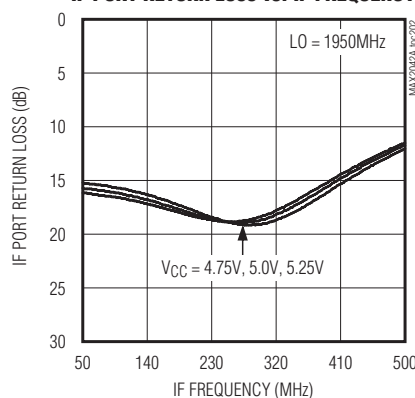

LO RETURN LOSS vs. LO FREQUENCY

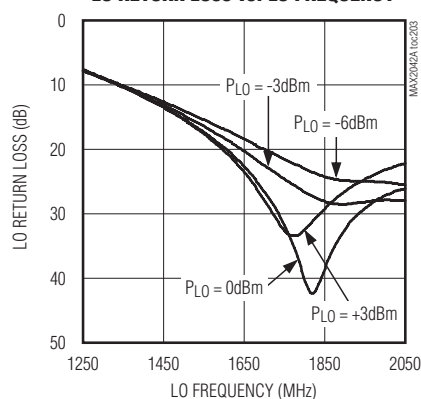

SUPPLY CURRENT vs. TEMPERATURE ( $T_C$ )









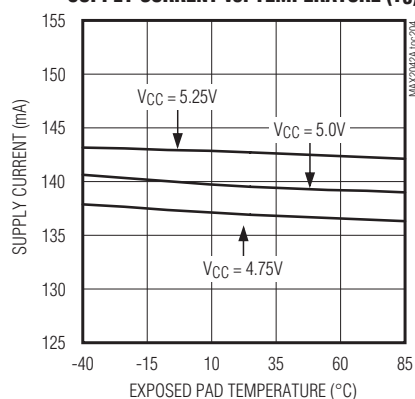


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 2,  $V_{CC} = +5.0V$ ,  $f_{RF} = f_{LO} - f_{IF}$ ,  $f_{IF} = 300MHz$ ,  $P_{IF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)

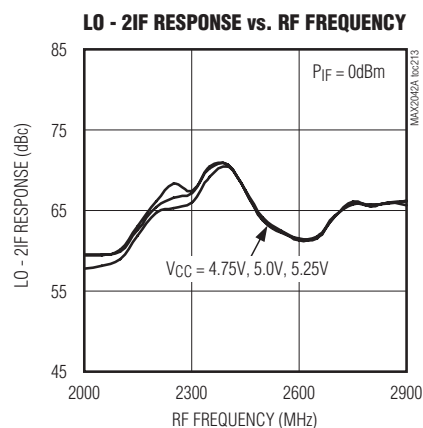
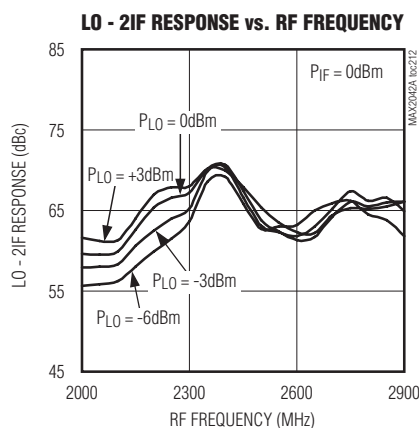
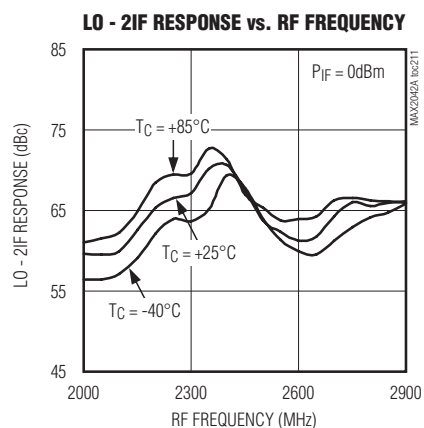
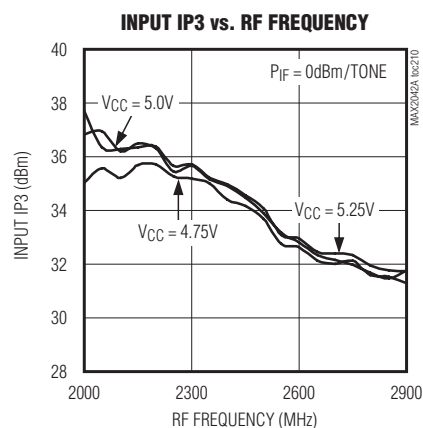
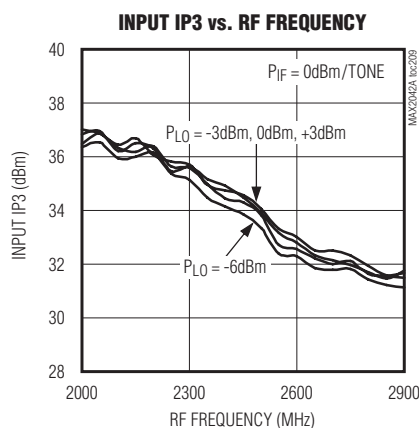
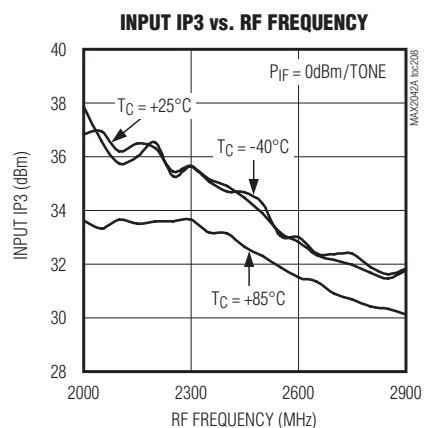
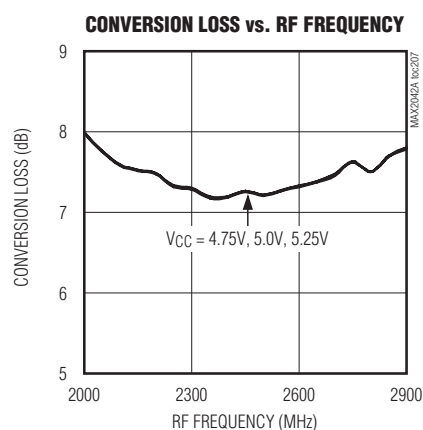
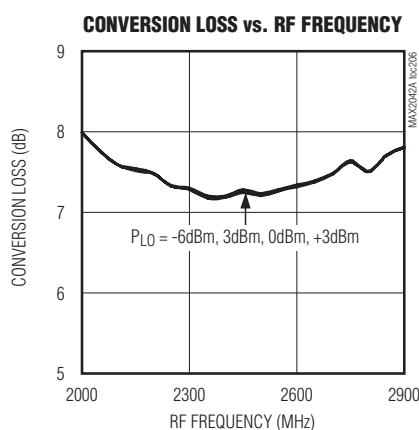
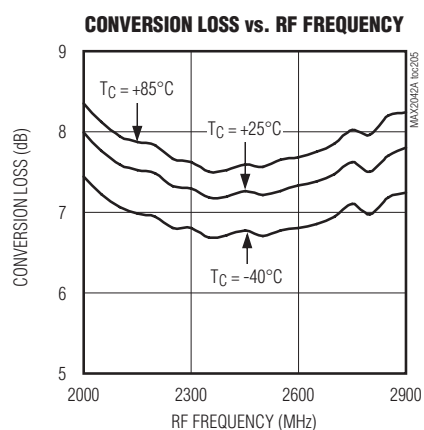


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 2,  $V_{CC} = +5.0V$ ,  $f_{RF} = f_{LO} - f_{IF}$ ,  $f_{IF} = 300MHz$ ,  $P_{IF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)

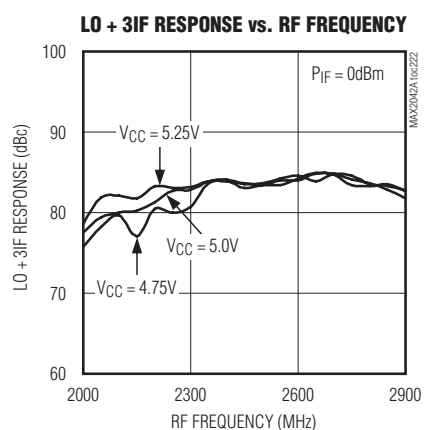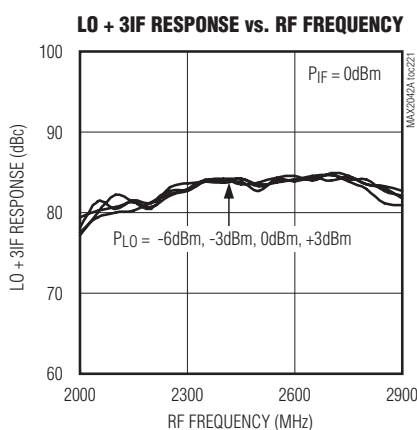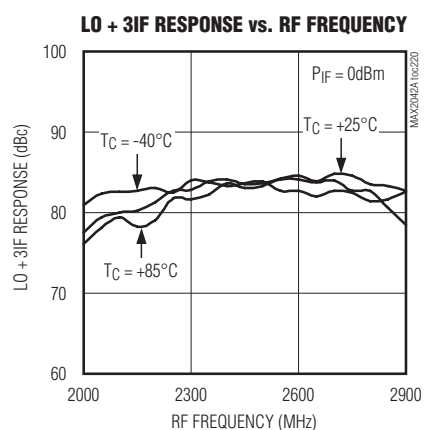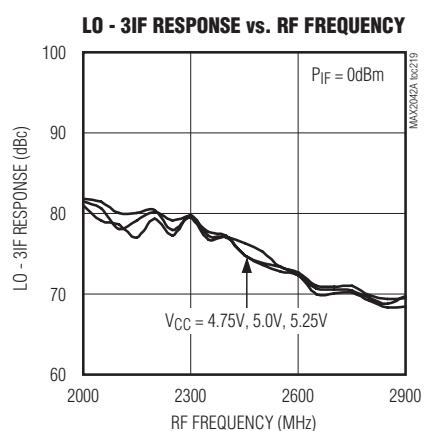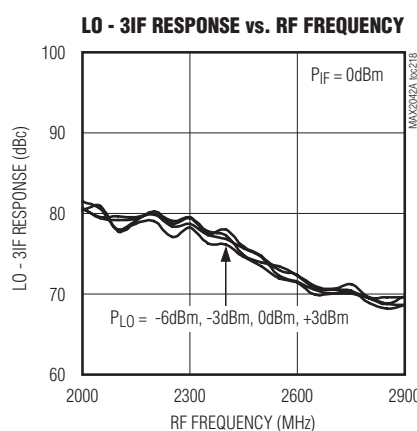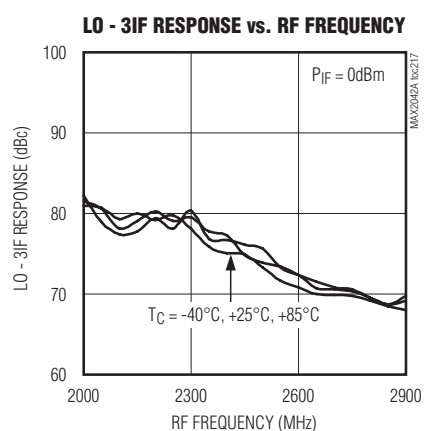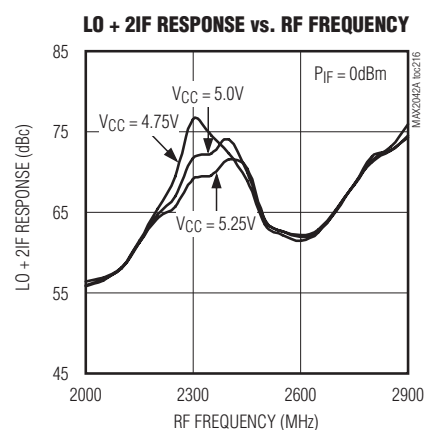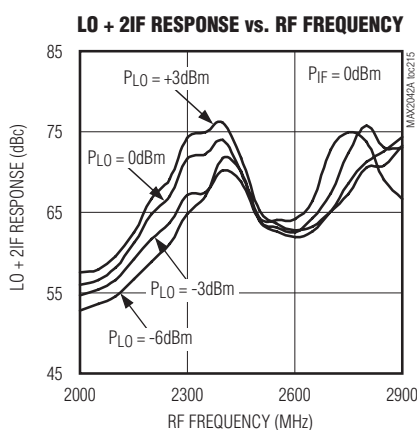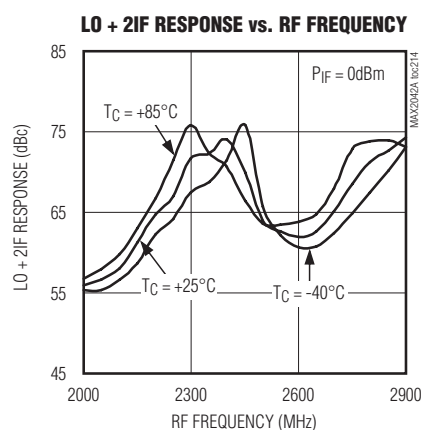


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 2,  $V_{CC} = +5.0V$ ,  $f_{RF} = f_{LO} - f_{IF}$ ,  $f_{IF} = 300MHz$ ,  $P_{IF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)




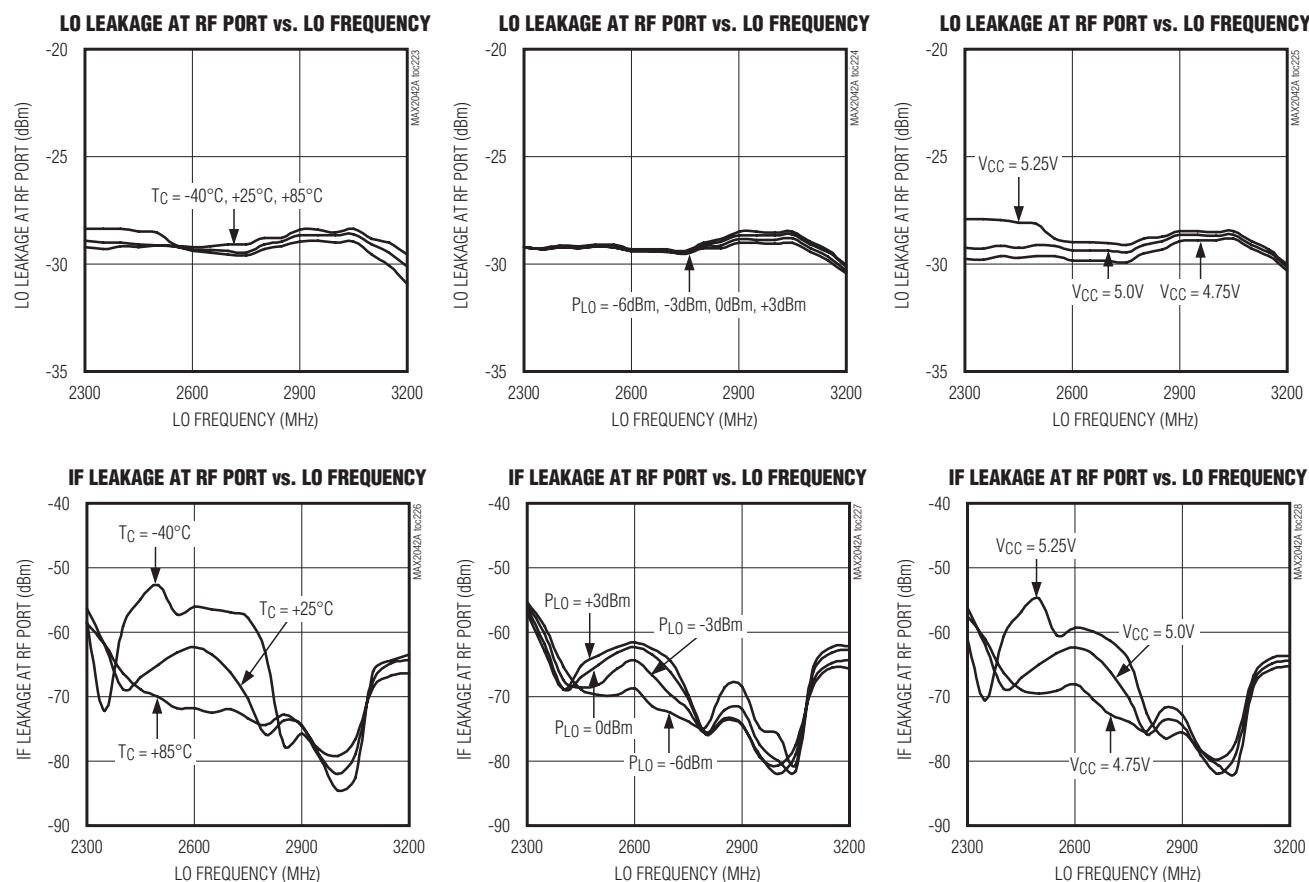


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 2,  $V_{CC} = +5.0V$ ,  $f_{RF} = f_{LO} - f_{IF}$ ,  $f_{IF} = 300MHz$ ,  $P_{IF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)






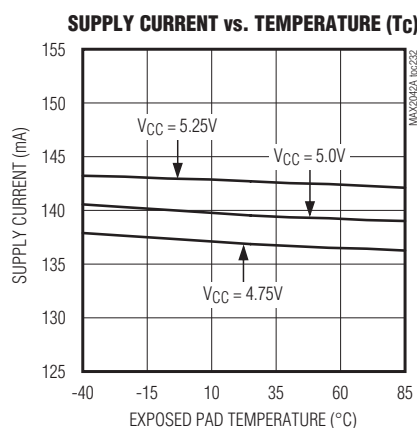
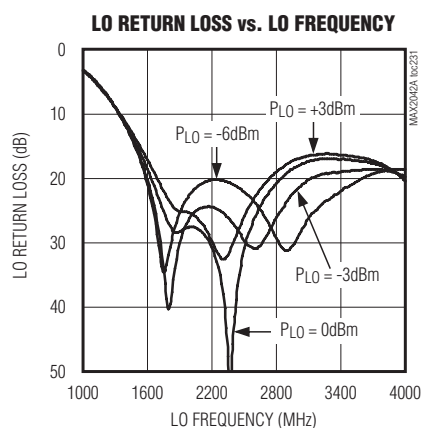
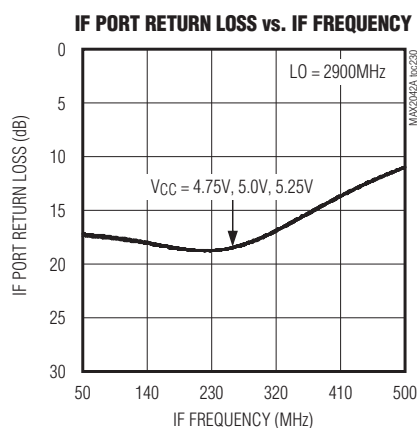
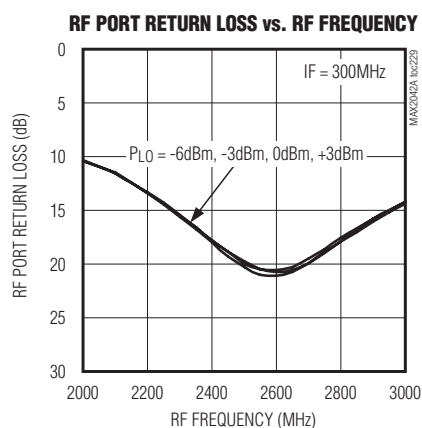


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 2,  $V_{CC} = +3.3V$ ,  $f_{RF} = f_{LO} - f_{IF}$ ,  $f_{IF} = 300MHz$ ,  $P_{IF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)

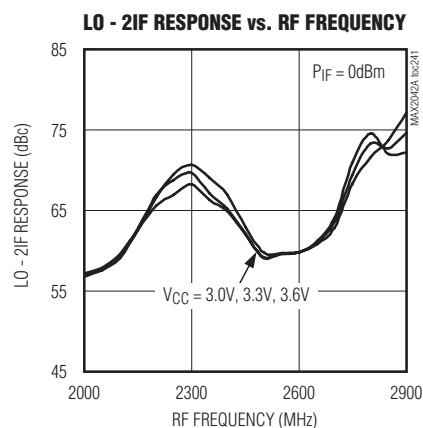
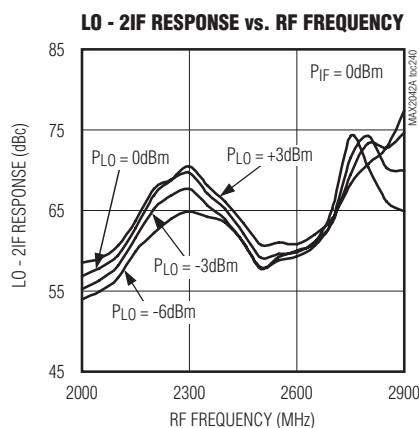
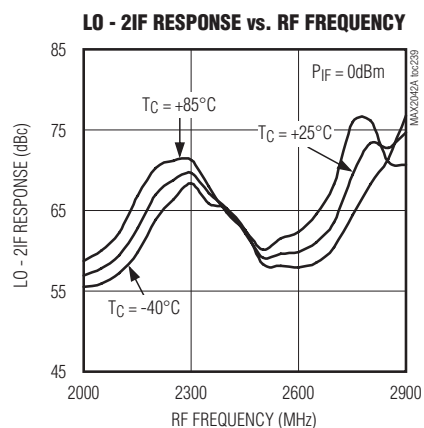
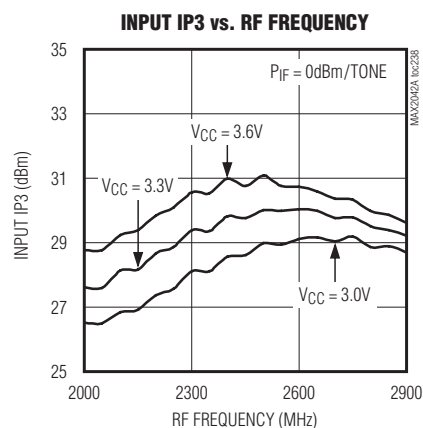
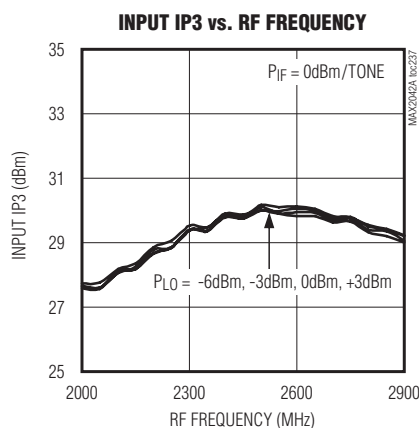
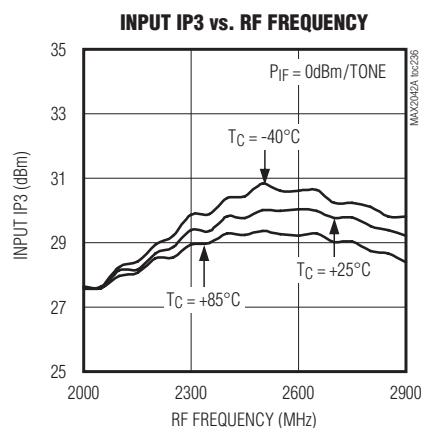
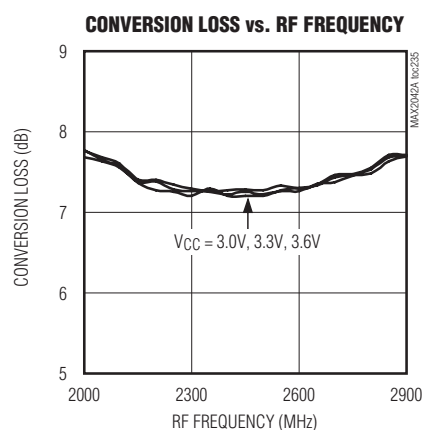
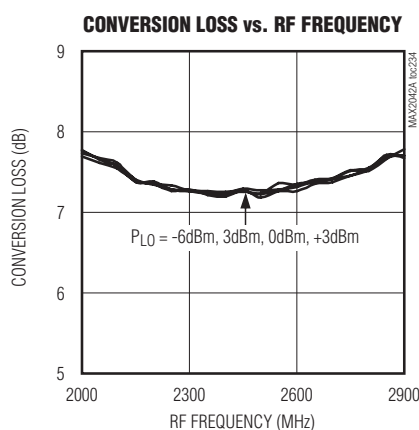
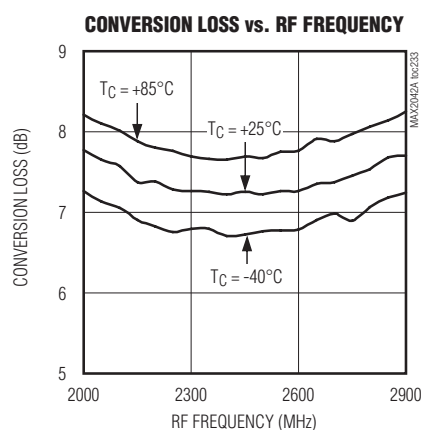


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 2,  $V_{CC} = +3.3V$ ,  $f_{RF} = f_{LO} - f_{IF}$ ,  $f_{IF} = 300MHz$ ,  $P_{IF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)

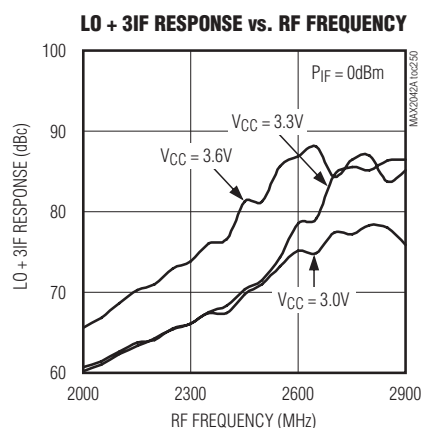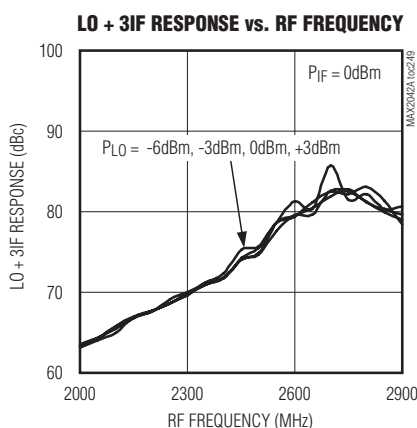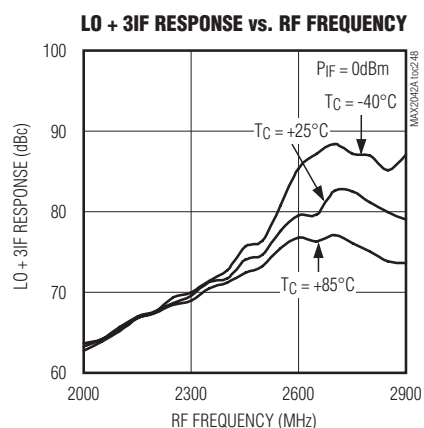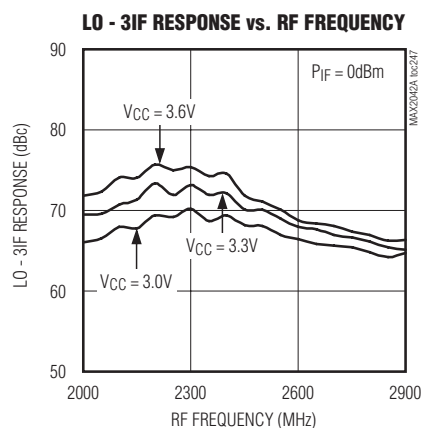
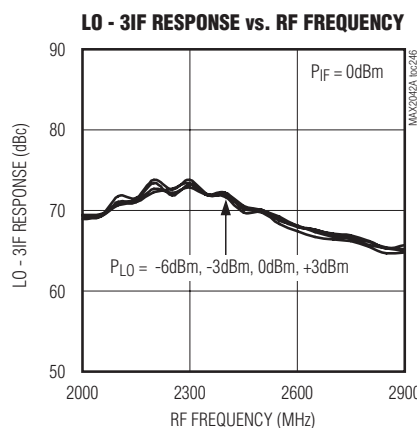
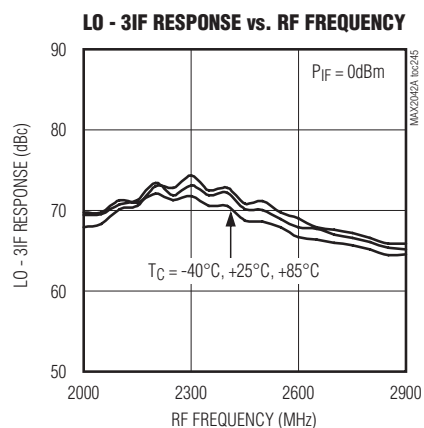
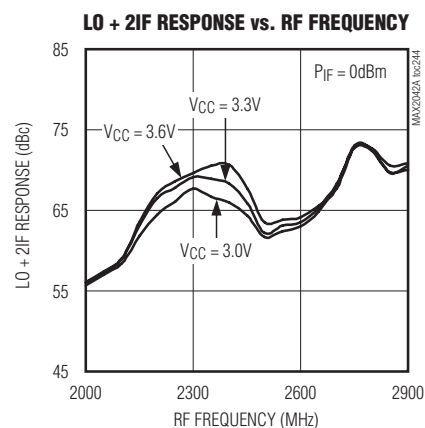
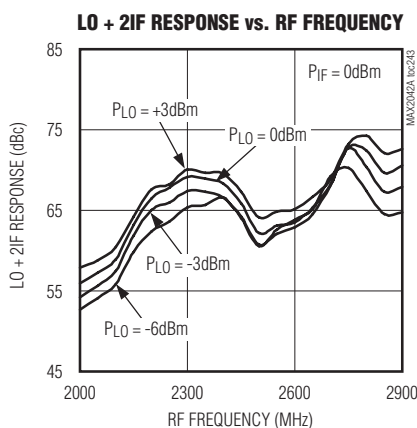
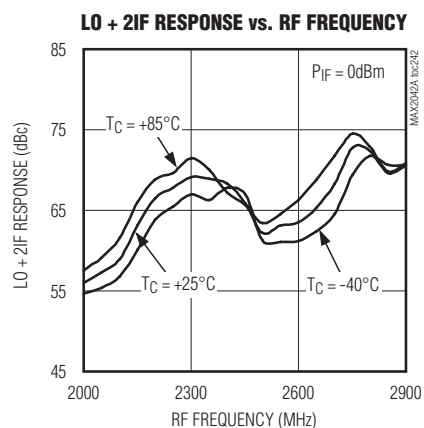


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Typical Operating Characteristics (continued)

(Typical Application Circuit with tuning elements outlined in Table 2,  $V_{CC} = +3.3V$ ,  $f_{RF} = f_{LO} - f_{IF}$ ,  $f_{IF} = 300MHz$ ,  $P_{IF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^\circ C$ , unless otherwise noted.)

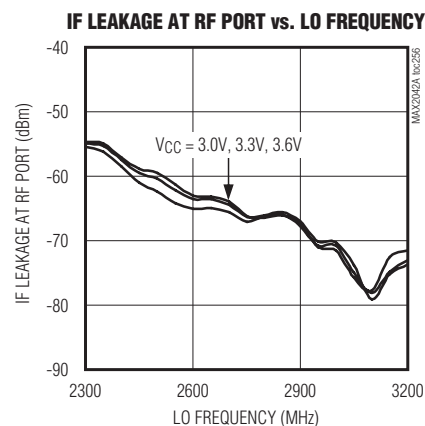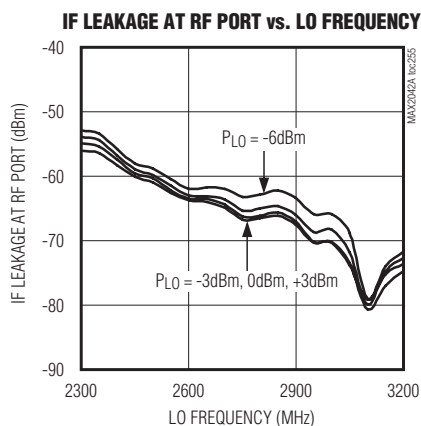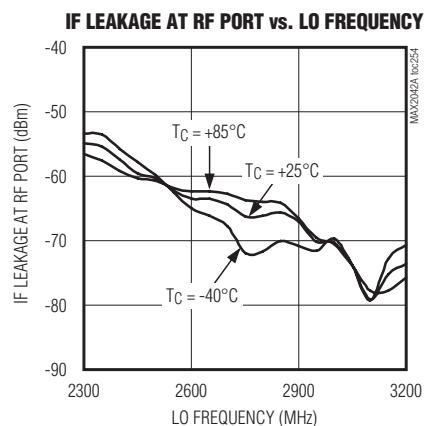
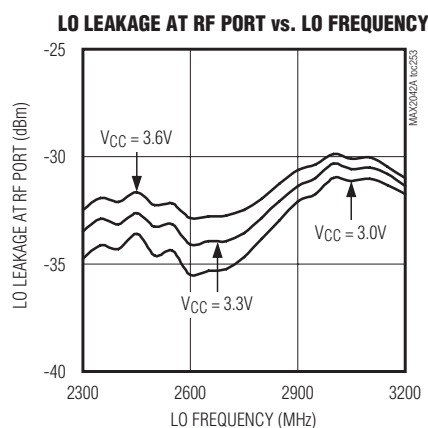
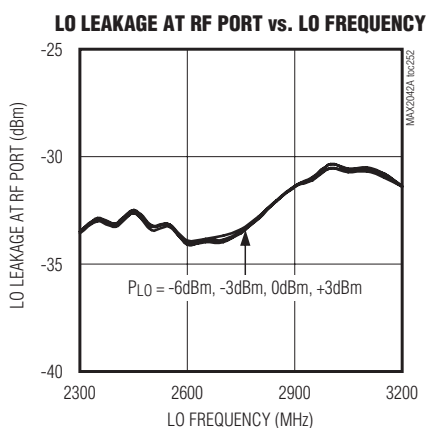
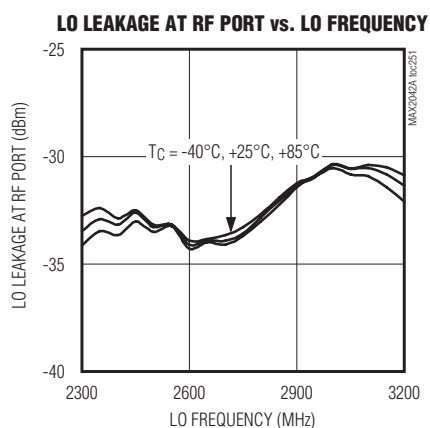


## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Typical Operating Characteristics (continued)


(Typical Application Circuit with tuning elements outlined in Table 2,  $V_{CC} = +3.3V$ ,  $f_{RF} = f_{LO} - f_{IF}$ ,  $f_{IF} = 300MHz$ ,  $P_{IF} = 0dBm$ ,  $P_{LO} = 0dBm$ ,  $T_C = +25^{\circ}C$ , unless otherwise noted.)

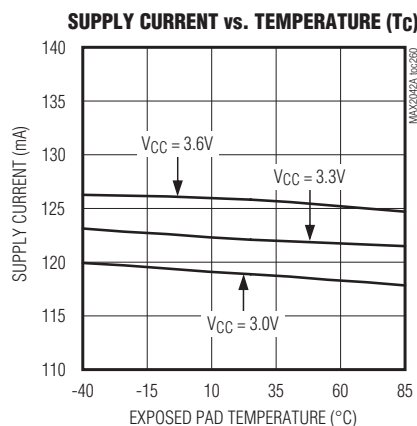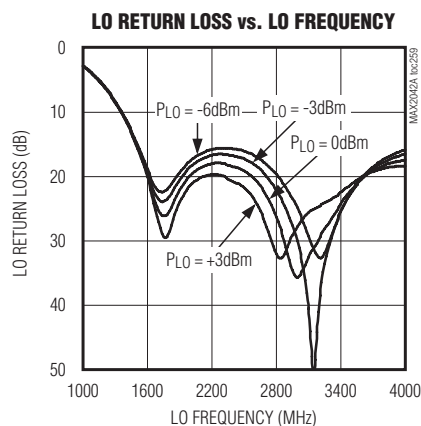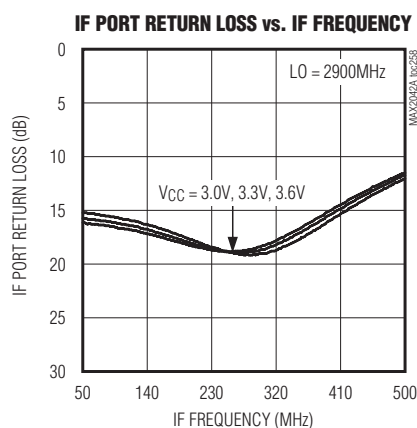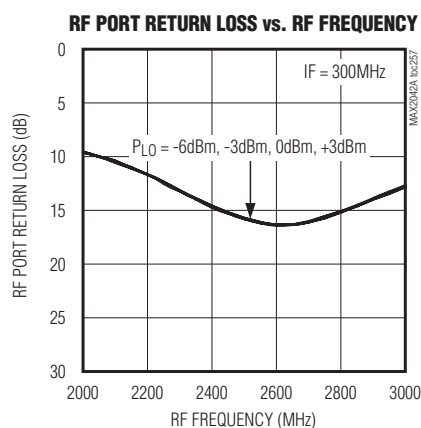

## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Pin Configuration

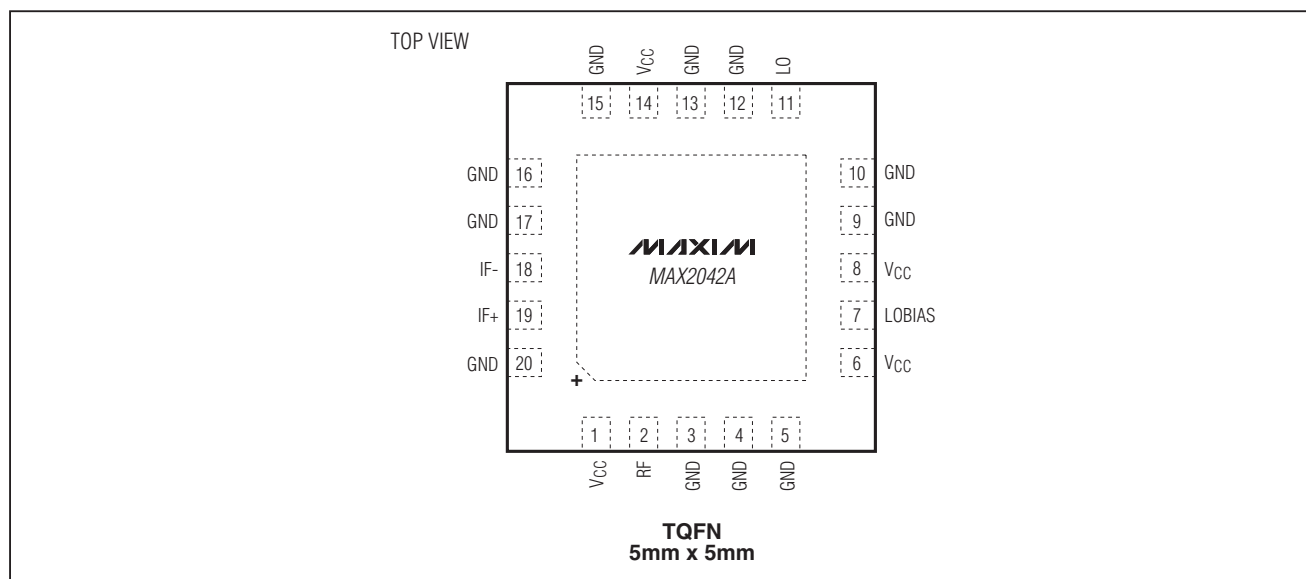


### Pin Description

| PIN                     | NAME            | FUNCTION                                                                                                                                                                                                                                                                                                              |
|-------------------------|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1, 6, 8, 14             | V <sub>CC</sub> | Power Supply. Bypass to GND with 0.01μF capacitors as close as possible to the pin.                                                                                                                                                                                                                                   |
| 2                       | RF              | Single-Ended 50Ω RF Input. Internally matched and DC shorted to GND through a balun. Provide a DC-blocking capacitor if required. Capacitor also provides some RF match tuning.                                                                                                                                       |
| 3, 4, 5, 10, 12, 13, 17 | GND             | Ground. Internally connected to the exposed pad. Connect all ground pins and the exposed pad (EP) together.                                                                                                                                                                                                           |
| 7                       | LOBIAS          | LO Amplifier Bias Control. Output bias resistor for the LO buffer. Connect a 698Ω ±1% resistor (nominal bias condition) from LOBIAS to ground. The maximum current seen by this resistor is 3mA.                                                                                                                      |
| 9, 15                   | GND             | Ground. Not internally connected. Ground these pins or leave unconnected.                                                                                                                                                                                                                                             |
| 11                      | LO              | Local Oscillator Input. This input is internally matched to 50Ω. Requires an input DC-blocking capacitor. Capacitor also provides some LO match tuning.                                                                                                                                                               |
| 16, 20                  | GND             | Ground. Connect all ground pins and the exposed pad (EP) together.                                                                                                                                                                                                                                                    |
| 18, 19                  | IF-, IF+        | Mixer Differential IF Output/Input                                                                                                                                                                                                                                                                                    |
| —                       | EP              | Exposed Pad. Internally connected to GND. Solder this exposed pad to a PCB pad that uses multiple ground vias to provide heat transfer out of the device into the PCB ground planes. These multiple via grounds are also required to achieve the noted RF performance (see the <i>Layout Considerations</i> section). |

## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Functional Diagram

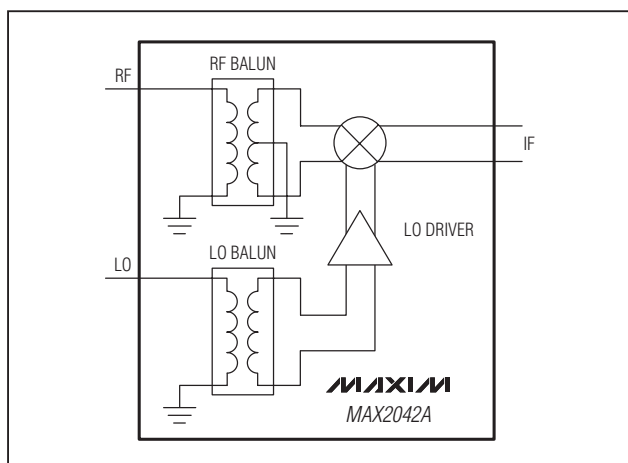

### Detailed Description

When used as a high-side LO injection mixer in the 2300MHz to 2900MHz band, the MAX2042A provides +33dBm of IIP3, with typical conversion loss and noise figure values of only 7.2dB and 7.25dB, respectively. The integrated baluns and matching circuitry allow for 50 $\Omega$  single-ended interfaces to the RF and the LO port. The integrated LO buffer provides a high drive level to the mixer core, reducing the LO drive required at the IC's input to a -6dBm to +3dBm range. The IF port incorporates a differential output, which is ideal for providing enhanced 2LO - 2RF performance.

Specifications are over broad frequency ranges to allow for use in GSM/EDGE, CDMA, TD-SCDMA, WCDMA, LTE, TD-LTE, WiMAX, and MMDS base stations. The device is specified to operate over a 1600MHz to 3900MHz RF input range, a 1300MHz to 4000MHz LO range, and a 50MHz to 500MHz IF range. The external IF components set the lower frequency range (see the [Typical Operating Characteristics](#) for details). Operation beyond these ranges is possible (see the [Typical Operating Characteristics](#) for additional information).

#### RF Input and Balun

The IC's RF input provides a 50 $\Omega$  match when combined with a series DC-blocking capacitor. This DC-blocking capacitor is required as the input is internally DC shorted to ground through the on-chip balun. When using an 8.2pF DC-blocking capacitor, the RF port input return loss is typically 17dB over the 2300MHz to 2900MHz

RF frequency range. A return loss of 14dB over the 3000MHz to 3900MHz range is achieved by changing the DC-blocking capacitor to 1.5pF.

For applications spanning the 1700MHz to 2200MHz frequency range, a 12nH shunt inductor can be used in conjunction with a 1.8pF DC-blocking capacitor to provide a typical return loss of 12dB. See the [Typical Application Circuit](#) and [Table 1](#) for details.

#### LO Inputs, Buffer, and Balun

With a broadband LO drive circuit spanning 1300MHz to 4000MHz, the device can be used in either low- or high-side LO injection architectures for virtually all 1.7GHz to 3.5GHz receiver and transmitter applications. The LO input is internally matched to 50 $\Omega$ , requiring only a 2pF DC-blocking capacitor. A two-stage internal LO buffer allows for a -6dBm to +3dBm LO input power range. The on-chip low-loss balun, along with an LO buffer, drives the double-balanced mixer. All interfacing and matching components from the LO inputs to the IF outputs are integrated on-chip.

#### High-Linearity Mixer

The core of the device is a double-balanced, high-performance passive mixer. Exceptional linearity is provided by the large LO swing from the on-chip LO buffer. IIP3, 2LO - 2RF rejection, and noise-figure performance are typically 33dBm, 72dBc, and 7.25dB, respectively.

#### Differential IF Ports

The device has a 50MHz to 500MHz IF frequency range, where the low-end frequency depends on the frequency response of the external IF components.

The device's differential IF ports are ideal for providing enhanced 2LO - 2RF performance. The user can connect a differential IF amplifier or SAW filter to the mixer IF port, but a DC block is required on both IF+/IF- ports to keep external DC from entering the IF ports of the mixer. To characterize the part, an external MABACT0069 1:1 transformer is used to transform the 50 $\Omega$  differential IF interface to 50 $\Omega$  single-ended. Its loss is included in the data presented in this data sheet. This transformer also supplies a needed IF pin ground return for the on-chip circuitry. If a ground return is not available on the IF pins, the return is achievable through some off-chip resistance to ground or large-value inductors. A 1k $\Omega$  to ground on each IF pin can be used for such an application. In addition, the IF interface directly supports single-ended, AC-coupled signals into or out of IF+ by shorting IF- to ground and using a 1k $\Omega$  resistor from IF+ to ground.

## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Applications Information

#### Input and Output Matching

The RF input provides a  $50\Omega$  match when combined with a series DC-blocking capacitor. Use an 8.2pF capacitor value for RF frequencies ranging from 2000MHz to 2900MHz. Use a 1.5pF capacitor value to match the RF port for the 3000MHz to 3900MHz band. For RF frequencies in the 1650MHz to 2250MHz range, use  $C1 = 1.8\text{pF}$  and  $L1 = 12\text{nH}$ . The LO input is internally matched to  $50\Omega$ , so use a 2pF DC-blocking capacitor to cover operations spanning the 1300MHz to 4000MHz range. The IF output impedance is  $50\Omega$  (differential). For evaluation, an external low-loss 1:1 (impedance ratio) balun transforms this impedance down to a  $50\Omega$  single-ended output (see the [Typical Application Circuit](#)).

#### Reduced-Power Mode

The device includes a pin (LOBIAS) that allows an external resistor to set the internal bias current. A nominal value for this resistor is given in [Tables 1](#) and [2](#). Larger-value resistors can be used to reduce power dissipation at the expense of some performance loss. If  $\pm 1\%$  resistors are not readily available, substitute with  $\pm 5\%$  resistors.

Significant reductions in power consumption can also be realized by operating the mixer with an optional supply voltage of 3.3V. Doing so reduces the overall power consumption by up to 42%. See the [3.3V Supply AC Electrical Characteristics](#) tables and the relevant 3.3V curves in the [Typical Operating Characteristics](#) section to evaluate the power vs. performance tradeoffs.

### Layout Considerations

A properly designed PCB is an essential part of any RF/microwave circuit. Keep RF signal lines as short as possible to reduce losses, radiation, and inductance. For the best performance, route the ground pin traces directly to the exposed pad under the package. The PCB exposed pad **MUST** be connected to the ground plane of the PCB. It is suggested that multiple vias be used to connect this pad to the lower-level ground planes. This method provides a good RF/thermal conduction path for the device. Solder the exposed pad on the bottom of the device package to the PCB.

### Power-Supply Bypassing

Proper voltage-supply bypassing is essential for high-frequency circuit stability. Bypass each VCC pin with the capacitors shown in the [Typical Application Circuit](#) and see [Table 1](#).

### Exposed Pad RF/Thermal Considerations

The exposed pad (EP) of the device's 20-pin TQFN package provides a low thermal-resistance path to the die. It is important that the PCB on which the device is mounted be designed to conduct heat from the EP. In addition, provide the EP with a low-inductance path to electrical ground. The EP **MUST** be soldered to a ground plane on the PCB, either directly or through an array of plated via holes.

## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

**Table 1. Component Values—Downconverter Mode**

| DESIGNATION     | QTY | DESCRIPTION                                                                                                                                 | COMPONENT SUPPLIER                     |
|-----------------|-----|---------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| C1              | 1   | 8.2pF microwave capacitor (0402); use for <b>2000MHz to 2900MHz</b> RF frequencies                                                          | Murata Electronics North America, Inc. |
|                 |     | 1.5pF microwave capacitor (0402); use for <b>3000MHz to 3900MHz</b> RF frequencies                                                          | Murata Electronics North America, Inc. |
|                 |     | 1.8pF microwave capacitor (0402); use for <b>1600MHz to 2000MHz</b> RF frequencies                                                          | Murata Electronics North America, Inc. |
| C2, C6, C8, C11 | 4   | 0.01μF microwave capacitors (0402)                                                                                                          | Murata Electronics North America, Inc. |
| C3, C9          | 0   | Not installed, capacitors                                                                                                                   | —                                      |
| C5              | 0   | Not installed, capacitor                                                                                                                    | —                                      |
| C10             | 1   | 2pF microwave capacitor (0402)                                                                                                              | Murata Electronics North America, Inc. |
| L1              | 1   | 12nH microwave inductor (0402); use for <b>1600MHz to 2000MHz</b> RF frequencies (this inductor is not used for other RF bands noted above) | TOKO America, Inc.                     |
| R1              | 1   | 698Ω ±1% resistor (0402)                                                                                                                    | —                                      |
| T1              | 1   | 1:1 IF balun MABACT0069                                                                                                                     | M/A-Com, Inc.                          |
| U1              | 1   | MAX2042A IC (20 TQFN)                                                                                                                       | Maxim Integrated Products, Inc.        |


**Table 2. Component Values—Upconverter Mode**

| DESIGNATION     | QTY | DESCRIPTION                                                                                                                                 | COMPONENT SUPPLIER                     |
|-----------------|-----|---------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| C1              | 1   | 8.2pF microwave capacitor (0402); use for <b>2000MHz to 2900MHz</b> RF frequencies                                                          | Murata Electronics North America, Inc. |
|                 |     | 1.5pF microwave capacitor (0402); use for <b>3000MHz to 3900MHz</b> RF frequencies                                                          | Murata Electronics North America, Inc. |
|                 |     | 1.8pF microwave capacitor (0402); use for <b>1600MHz to 2000MHz</b> RF frequencies                                                          | Murata Electronics North America, Inc. |
| C2, C6, C8, C11 | 4   | 0.01μF microwave capacitors (0402)                                                                                                          | Murata Electronics North America, Inc. |
| C3, C9          | 0   | Not installed, capacitors                                                                                                                   | —                                      |
| C5              | 0   | Not installed, capacitor                                                                                                                    | —                                      |
| C10             | 1   | 2pF microwave capacitor (0402)                                                                                                              | Murata Electronics North America, Inc. |
| L1              | 1   | 12nH microwave inductor (0402); use for <b>1600MHz to 2000MHz</b> RF frequencies (this inductor is not used for other RF bands noted above) | TOKO America, Inc.                     |
| R1              | 1   | 698Ω ±1% resistor (0402)                                                                                                                    | —                                      |
| T1              | 1   | 1:1 IF balun MABACT0069                                                                                                                     | M/A-Com, Inc.                          |
| U1              | 1   | MAX2042A IC (20 TQFN)                                                                                                                       | Maxim Integrated Products, Inc.        |

## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Typical Application Circuit

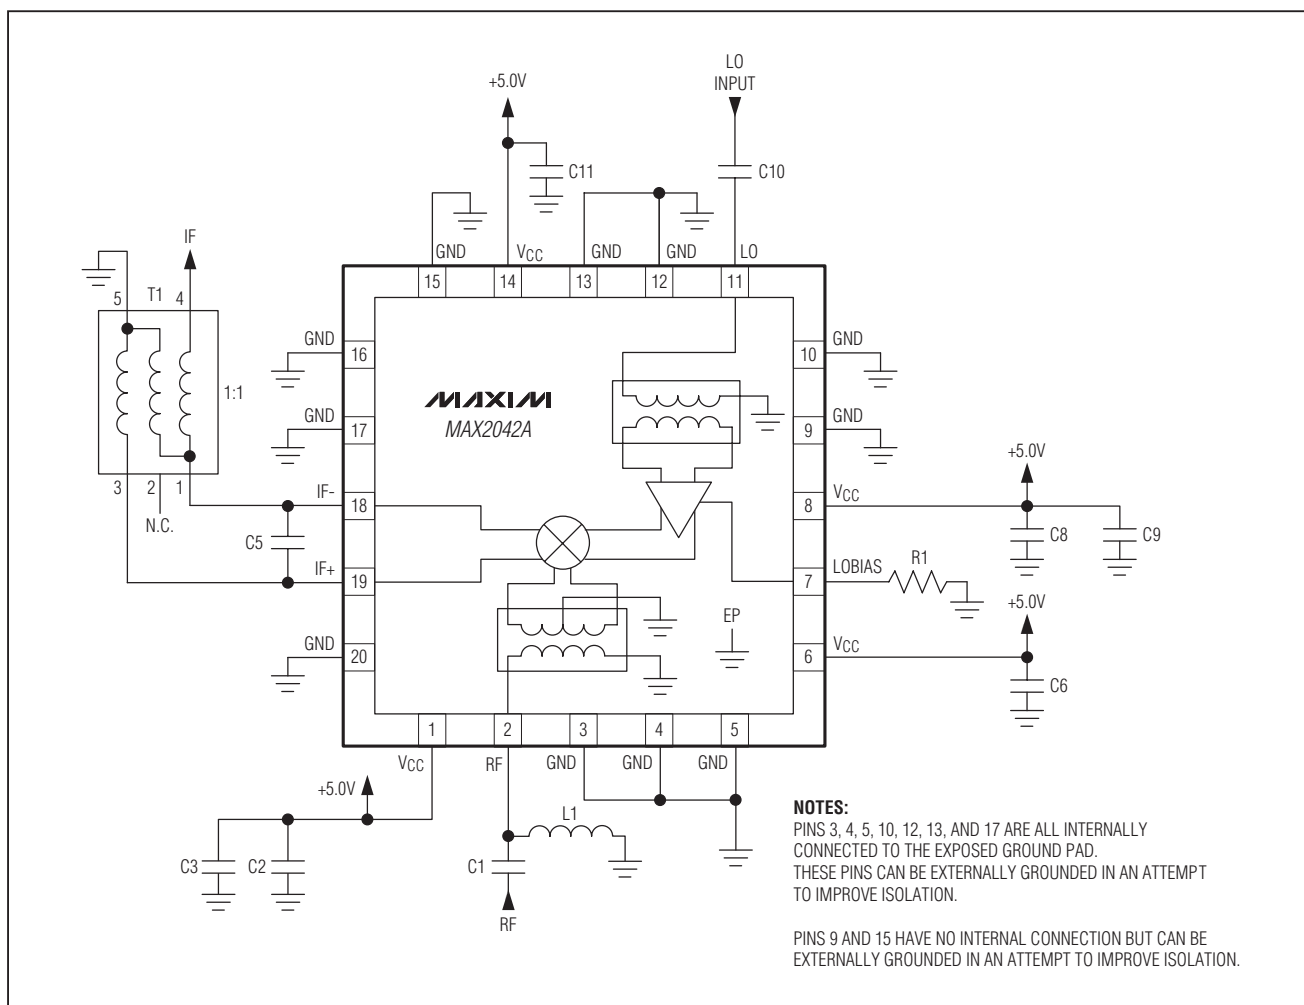

## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Ordering Information

| PART          | TEMP RANGE     | PIN-PACKAGE |
|---------------|----------------|-------------|
| MAX2042AETP+  | -40°C to +85°C | 20 TQFN-EP* |
| MAX2042AETP+T | -40°C to +85°C | 20 TQFN-EP* |

+ Denotes a lead(Pb)-free/RoHS-compliant package.

\*EP = Exposed pad.

T = Tape and reel.

### Chip Information

PROCESS: SiGe BiCMOS

### Package Information

For the latest package outline information and land patterns (footprints), go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | OUTLINE NO.             | LAND PATTERN NO.        |
|--------------|--------------|-------------------------|-------------------------|
| 20 TQFN-EP   | T2055+3      | <a href="#">21-0140</a> | <a href="#">90-0008</a> |

## MAX2042A

# SiGe High-Linearity, 1600MHz to 3900MHz Upconversion/Downconversion Mixer with LO Buffer

### Revision History

| REVISION<br>NUMBER | REVISION<br>DATE | DESCRIPTION     | PAGES<br>CHANGED |
|--------------------|------------------|-----------------|------------------|
| 0                  | 6/11             | Initial release | —                |

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

**Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600** 52