

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:




[I/O Interconnect](#)
[GLF-121-810-000](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC., USA, AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

DWG. NO.	ZONE	REV.	DESCRIPTION	DATE	APPROVED
X10-0X0		J	ECN C682	07/24/02	P.S.
		K	ADD NOTE & CHANGE P/N TO REFLECT RDHS COMPLIANT. CHANGE PACKING SPEC. PER ACTUAL DATA PER ECN D822	04/14/05	M.G.

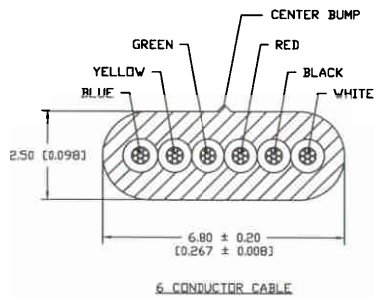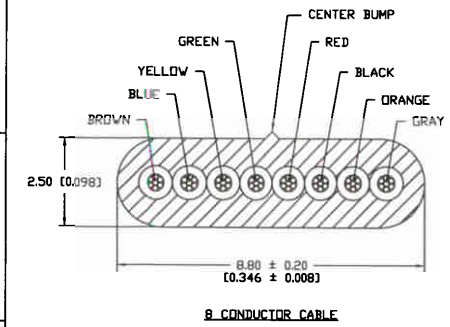

NOTES: UNLESS OTHERWISE SPECIFIED.

1.0 MATERIAL AND SPECIFICATIONS

- 1.01 CONDUCTORS: 26 AWG (12/0.12 mm) STRANDED BARE COPPER.
- 1.02 INSULATION: POLYPROPYLENE
- 1.03 COLOR: PER CALLOUT
- 1.04 PACKAGING: (SEE PAGE 2)

2.0 ELECTRICAL CHARACTERISTICS

- 2.01 TEMPERATURE & VOLTAGE RATING: 80°C 30 V
- 2.02 CONDUCTORS RESISTANCE: 148 OHMS/KM MAX. AT 20°C
- 2.03 INSULATION RESISTANCE: 100 MEGOHMS/KM MIN. AT 20°C
- 2.04 CAPACITANCE: 15 PF/FT (MAX)
- 2.05 DIELECTRIC TEST: AC-500V PER 1 MINUTE

3.0 PLACE BAR CODE LABEL ON THE OUTSIDE OF EACH SHIPPING BOX LABEL DETAIL SEE DWG 090-990-001. FOR CUSTOMER CODE 4DGK ONLY.



GLF-121-410-000	4	SILVER SATIN	[0.551 ± 0.039] 14.00 ± 1.00
GLF-121-410-010	4	BLACK	[0.551 ± 0.039] 14.00 ± 1.00
GLF-121-410-020	4	WHITE	[0.551 ± 0.039] 14.00 ± 1.00
GLF-121-610-000	6	SILVER SATIN	[0.551 ± 0.039] 14.00 ± 1.00
GLF-121-610-010	6	BLACK	[0.551 ± 0.039] 14.00 ± 1.00
GLF-121-610-020	6	WHITE	[0.551 ± 0.039] 14.00 ± 1.00
GLF-121-810-000	8	SILVER SATIN	[0.748 ± 0.039] 19.00 ± 1.00
GLF-121-810-010	8	BLACK	[0.748 ± 0.039] 19.00 ± 1.00
GLF-121-810-020	8	WHITE	[0.748 ± 0.039] 19.00 ± 1.00
I/O INTERCONNECT PART NUMBER	NUMBER OF CONDUCTORS	COLOR	Ø "A"

THIRD ANGLE PROJECTION

UNLESS OTHERWISE NOTED:
 1) DIMENSIONS ARE IN MILLIMETER (INCHES)
 2) TOLERANCES:
 XX ± 10.0 (0.39)
 XXX ± 0.25 (0.01)

I/O INTERCONNECT SANTA ANA, CALIFORNIA		TITLE: 26 AWG (12/0.12 mm) BARE COPPER, 7.00 FT EXTENDED, NON-UL, UNSHIELDED, MODULAR CABLE
DR. BY: JERRY SUN 04/14/05 DR. CHECKED:	PART NO: GLF-121-X10-0X0	DWG NO: GLF-121-X10-0X0
ENG. BY:	CUSTOMER: I/O INTERCONNECT	REV: K
CUST./SALES:	SCALE: NONE	SHEET 1 OF 2

A		B		C		D		E		F		G		H	
THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. NO PART AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.										DWG. NO.	ZONE	REV.	DESCRIPTION	DATE	APPROVED
										X10-0X0		J	ECN C6B2	07/24/02	P.S.
												K	ADD NOTE & CHANGE P/N TO REFLECT ROHS COMPLIANT. CHANGE PACKAGING SPEC. PER ACTUAL DATA PER ECN D6B2	04/14/05	M.G.

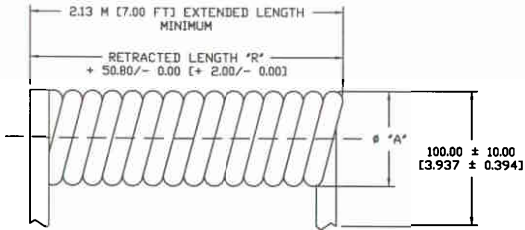

BUNDLE SPECIFICATION

NOTES: UNLESS OTHERWISE SPECIFIED.

4.0 PACKAGING SPECIFICATION

- 4.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION.
- 4.02 PLACE PLASTIC BAG IN SHIPPING BOX. SEE TAB BLOCK FOR PACKAGING QUANTITY PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE.
- 5.0 PART TO BE ROHS COMPLIANT.

4	533.40	[21.000]	L=13.00" X W=25.00" X H=9.00"	10 BUNDLE, 250 PCS
6	609.60	[24.000]	L=13.00" X W=25.00" X H=9.00"	10 BUNDLE, 250 PCS
8	711.20	[28.000]	L=13.00" X W=30.00" X H=9.00"	5 BUNDLE, 125 PCS
CONDUCTORS NUMBER OF	MILLIMETERS	INCHES	DIMENSION MAX. OUTSIDE SHIPPING BOX	PACKAGING QUANTITY PER SHIPPING BOX
	RETRACTED LENGTH 'R'			

TABULATION BLOCK

THIRD ANGLE PROJECTION 		I/O INTERCONNECT SANTA ANA, CALIFORNIA	
UNLESS OTHERWISE NOTED: 1) DIMENSIONS ARE IN MILLIMETER (INCHES) 2) TOLERANCES: XX ± 10.0 (0.39) X.XX ± 0.25 (0.01)		DR. BY: JERRY ELM 04/14/05 DR. CHECKER: ENG. BY: CUST./SALES: SA:	TITLE: 25 AWG (12/0.12 mm) BARE COPPER, 7.00 FT EXTENDED, NON-UL, UNSHIELDED, MODULAR CABLE PART NO.: GLF-121-X10-0X0 DWG NO.: GLF-121-X10-0X0 CUSTOMER: I/O INTERCONNECT SCALE: NONE SHEET 2 OF 2
			REV. K