

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[STMicroelectronics](#)

[BFX34](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



BFX34



SILICON NPN TRANSISTOR

- STMicroelectronics PREFERRED SALESTYPE
- NPN TRANSISTOR

DESCRIPTION

The BFX34 is a silicon Epitaxial Planar NPN transistor in Jedec TO-39 metal case, intended for high current applications.

Very low saturation voltage and high speed at high current levels make it ideal for power drivers, power amplifiers, switching power supplies and relay drivers inverters.

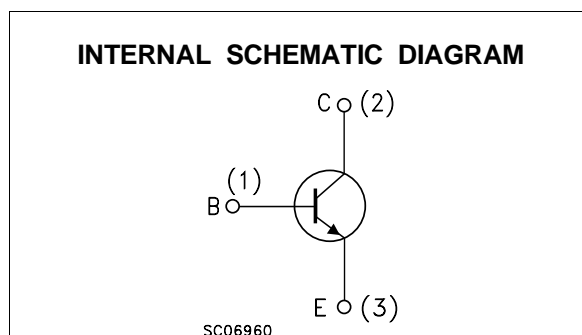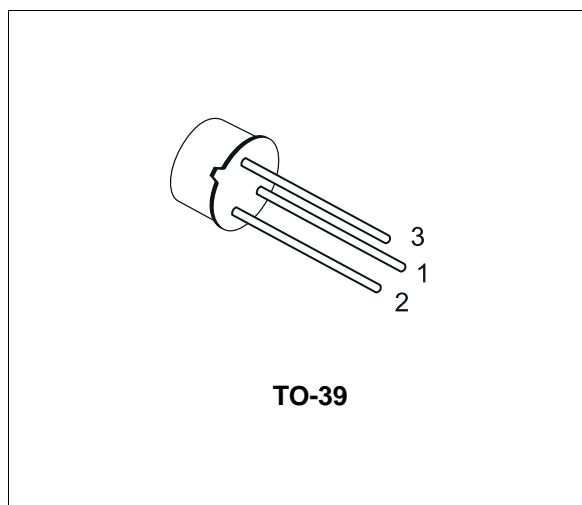

ABSOLUTE MAXIMUM RATINGS

| Symbol | Parameter | Value | Unit |
|-----------|--|------------|------------------|
| V_{CBO} | Collector-Base Voltage ($I_E = 0$) | 120 | V |
| V_{CEO} | Collector-Emitter Voltage ($I_B = 0$) | 60 | V |
| V_{EBO} | Emitter-Base Voltage ($I_C = 0$) | 6 | V |
| I_C | Collector Current | 5 | A |
| P_{tot} | Total Dissipation at $T_{case} \leq 25\text{ }^\circ\text{C}$ $T_{amb} \leq 25\text{ }^\circ\text{C}$ | 5 | W |
| | | 0.87 | W |
| T_{stg} | Storage Temperature | -65 to 200 | $^\circ\text{C}$ |
| T_j | Max. Operating Junction Temperature | 200 | $^\circ\text{C}$ |

BFX34

THERMAL DATA

| | | | | |
|-----------------------|----------------------------------|-----|-----|------|
| R _{thj-case} | Thermal Resistance Junction-case | Max | 35 | °C/W |
| R _{thj-amb} | Thermal Resistance Junction-amb | Max | 200 | °C/W |

ELECTRICAL CHARACTERISTICS (T_{case} = 25 °C unless otherwise specified)


| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|-------------------------------------|---|--|---|------|-----------------|-------------|----------|
| I _{CES} | Collector Cut-off Current (V _{BE} = 0) | V _{CE} = 60 V | | | 0.02 | 10 | μA |
| I _{EBO} | Emitter Cut-off Current (I _C = 0) | V _{EB} = 4 V | | | 0.05 | 10 | μA |
| V _{(BR)CBO} * | Collector-base Breakdown Voltage (I _E = 0) | I _C = 5 mA | | 120 | | | V |
| V _{CEO(sus)} * | Collector-Emitter Sustaining Voltage (I _B = 0) | I _C = 100 mA | | 60 | | | V |
| V _{EBO} * | Emitter-base Voltage (I _C = 0) | I _E = 1 mA | | 6 | | | V |
| V _{CE(sat)} * | Collector-Emitter Saturation Voltage | I _C = 5 A | I _B = 0.5 A | | 0.4 | 1 | V |
| V _{BE(sat)} * | Base-Emitter Saturation Voltage | I _C = 5 A | I _B = 0.5 A | | 1.3 | 1.6 | V |
| h _{FE} * | DC Current Gain | I _C = 1 A I _C = 1.5 A I _C = 2 A | V _{CE} = 2 V V _{CE} = 0.6 V V _{CE} = 2 V | 40 | 100 75 80 | 150 | |
| f _T * | Transition Frequency | I _C = 0.5 A f = 20 MHz | V _{CE} = 5 V | 70 | 100 | | MHz |
| C _{EBO} | Emitter-base Capacitance | I _C = 0 f = 1 MHz | V _{EB} = 0.5 V | | 300 | 500 | pF |
| C _{CBO} | Collector-base Capacitance | I _E = 0 f = 1 MHz | V _{CB} = 10 V | | 40 | 100 | pF |
| t _{on} t _{off} | RESISTIVE LOAD Turn-on Time Turn-off Time | I _C = 0.5 A I _{B1} = -I _{B2} = 0.5 A | V _{CC} = 20 V | | 0.6 0.6 | 0.25 1.2 | μs μs |

* Pulsed: Pulse duration = 300 μs, duty cycle 1.5 %

BFX34

TO-39 MECHANICAL DATA

| DIM. | mm | | | inch | | |
|------|------------|------|------|-------|------|-------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | 12.7 | | | 0.500 | | |
| B | | | 0.49 | | | 0.019 |
| D | | | 6.6 | | | 0.260 |
| E | | | 8.5 | | | 0.334 |
| F | | | 9.4 | | | 0.370 |
| G | 5.08 | | | 0.200 | | |
| H | | | 1.2 | | | 0.047 |
| I | | | 0.9 | | | 0.035 |
| L | 45° (typ.) | | | | | |

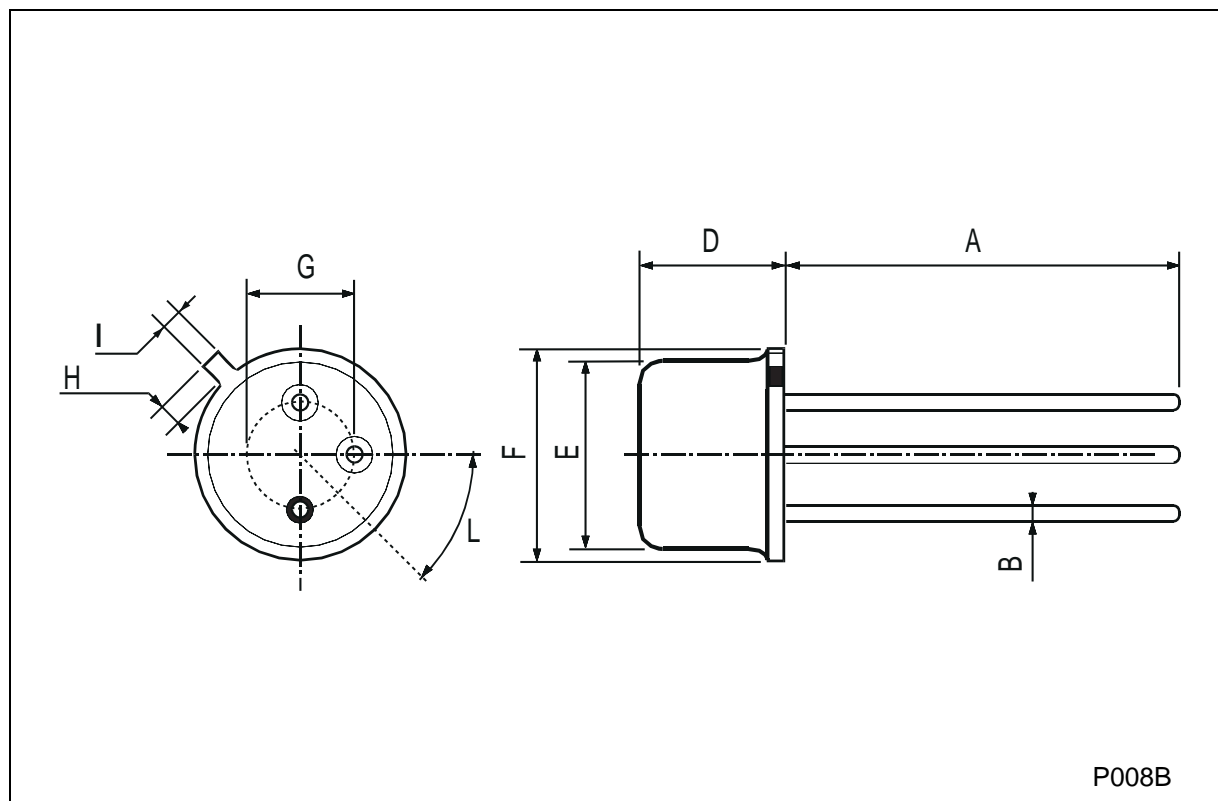

P008B

BFX34

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a trademark of STMicroelectronics

© 2001 STMicroelectronics – Printed in Italy – All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco -
Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>