

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[EPCOS \(TDK\)](#)  
[B39871B3574U310](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



# SAW Components

Data Sheet B3574

Data Sheet

A large, stylized graphic of the EPCOS logo is superimposed on a grayscale globe. The globe shows the outlines of continents and is set against a dark background. The EPCOS logo is rendered in a light, glowing white color, appearing to wrap around the globe.



**SAW Components**

**B3574**

**Low Loss Filter**

**868,30 MHz**

**Data Sheet**


Ceramic package **QCC8C**

**Features**

- RF low-loss filter for remote control receivers
- Package for **S**urface **M**ounted **T**echnology (**SMT**)
- Balanced and unbalanced operation possible

**Terminals**


- Ni, gold plated

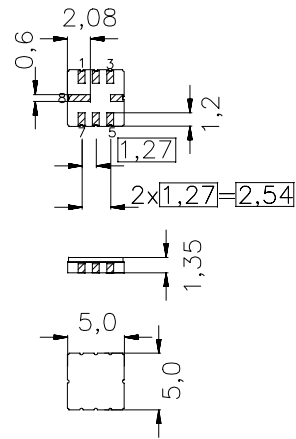

typ. dimensions in mm, approx. weight 0,1 g

**Pin configuration**

- 1 Input
- 2 Input Ground or balanced input
- 5 Output
- 6 Output Ground or balanced output
- 7 External coupling coil
- 4,8 Case-Ground
- 3 to be grounded

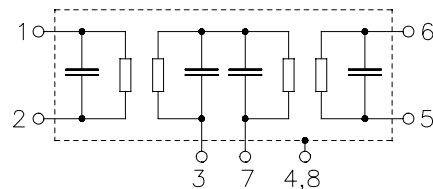

Type	Ordering code	Marking and package according too	Packing according to
B3574	B39871-B3574-U310	C61157-A7-A56	F61074-V8070-Z000

Electrostatic Sensitive Device (ESD)

**Maximum ratings**

Operable temperature range	$T_A$	- 45/+ 95	°C
Storage temperature range	$T_{stg}$	- 45/+ 95	°C
DC voltage	$V_{DC}$	0	V
Source power	$P_S$	0	dBm



<b>SAW Components</b>	<b>B3574</b>
<b>Low Loss Filter</b>	<b>868,30 MHz</b>

Data Sheet

Characteristics

Reference temperature:  $T_A = -45 \dots 95 \text{ }^\circ\text{C}$   
 Terminating source impedance:  $Z_S = 50 \text{ } \Omega$  and matching network  
 Terminating load impedance:  $Z_L = 50 \text{ } \Omega$  and matching network

		min.	typ.	max.	
<b>Center frequency</b> (center frequency between 3 dB points)	$f_C$	—	868,30	—	MHz
<b>Minimum insertion attenuation</b> 868,20 ... 868,40 MHz (including loss in matching coils)	$\alpha_{\min}$	—	4,2	5,7	dB
<b>Amplitude ripple (p-p)</b> 868,20 ... 868,40 MHz		—	0,5	2,0	dB
868,16 ... 868,44 MHz		—	0,7	3,0	dB
<b>Relative attenuation (relative to <math>\alpha_{\min}</math>)</b>	$\alpha_{\text{rel}}$				
10,00 ... 600,00 MHz		60	65	—	dB
600,00 ... 800,00 MHz		42	47	—	dB
800,00 ... 848,00 MHz		54	59	—	dB
848,00 ... 863,00 MHz		51	56	—	dB
863,00 ... 866,80 MHz		37	42	—	dB
870,00 ... 872,00 MHz		30	35	—	dB
872,00 ... 882,00 MHz		47	52	—	dB
882,00 ... 1000,00 MHz		50	55	—	dB
<b>Impedance</b> for pass band matching <sup>2)</sup> Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$ Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$		—	360    1,3 380    1,3	—	$\Omega \parallel \text{pF}$ $\Omega \parallel \text{pF}$
<b>Temperature coefficient of frequency</b> <sup>1)</sup>	$TC_f$	—	-0,03	—	ppm/K <sup>2</sup>
<b>Frequency inversion point</b>	$T_0$	10	—	40	$^\circ\text{C}$

<sup>1)</sup>Temperature dependance of  $f_C$ :  $f_C(T_A) = f_C(T_0) (1 + TC_f(T_A - T_0)^2)$

<sup>2)</sup> Impedance for passband matching bases on an ideal, perfect matching of the SAW filter to source- and to load impedance (here 50 Ohm). After the SAW filter is removed and input impedance into the input matching / output matching network is calculated.


The conjugate complex value of these characteristic impedances are the input and output impedances for flat passband. For more details, we refer to EPCOS application note #4.



SAW Components	B3574
Low Loss Filter	868,30 MHz

Data Sheet

Matching network to 50 Ω (element values depend on pcb layout and equivalent circuit)

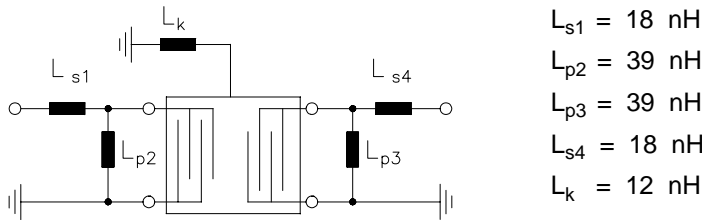


Minimising the crosstalk

For a good ultimate rejection a low crosstalk is necessary. Low crosstalk can be realised with a good RF layout. The major crosstalk mechanism is caused by the “ground-loop” problem.

Grounding loops are created if input-and output transducer GND are connected on the top-side of the PCB and fed to the system grounding plane by a common via hole. To avoid the common ground path, the ground pin of the input- and output transducer are fed to the system ground plane (bottom PCB plane) by their own via hole. The transducers’ grounding pins should be isolated from the upper grounding plane.

A common GND inductivity of 0.5nH degrades the ultimate rejection (crosstalk) by 20dB.

The optimised PCB layout, including matching network for transformation to 50 Ohm, is shown here. In this PCB layout the grounding loops are minimised to realise good ultimate rejection.



Optimised PCB layout for SAW filters in QCC8C package, pinning 1,5 (top side, scale 1:1)

The bottom side is a copper plane (system ground area). The input and output grounding pins are isolated and connected to the common ground by separated via holes.

For good contact of the upper grounding area with the lower side it is necessary to place enough via holes.



SAW Components


B3574

Low Loss Filter


868,30 MHz

Data Sheet

Normalized frequency response

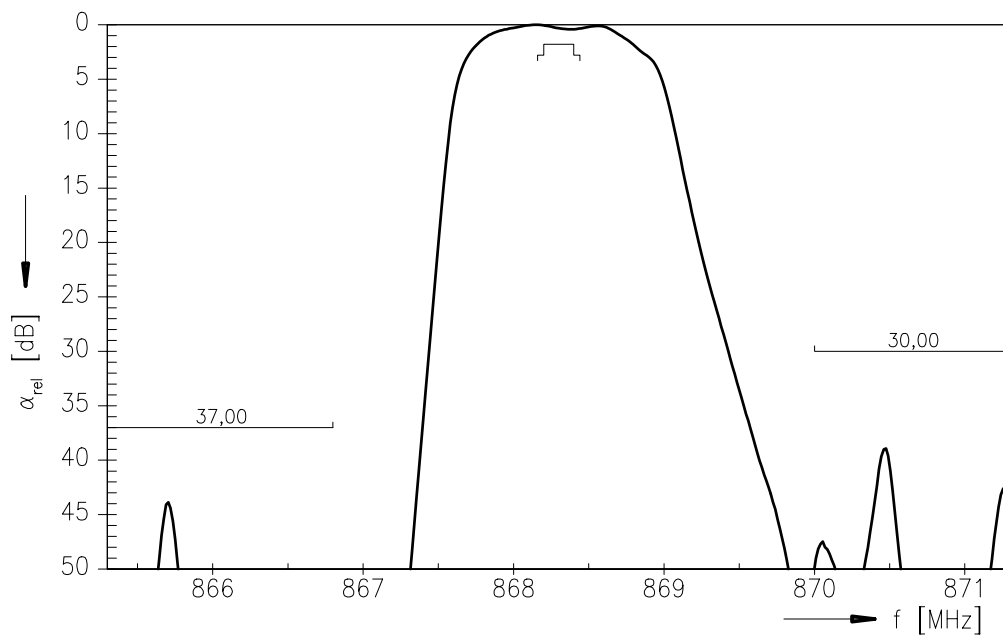

Normalized frequency response (wideband)

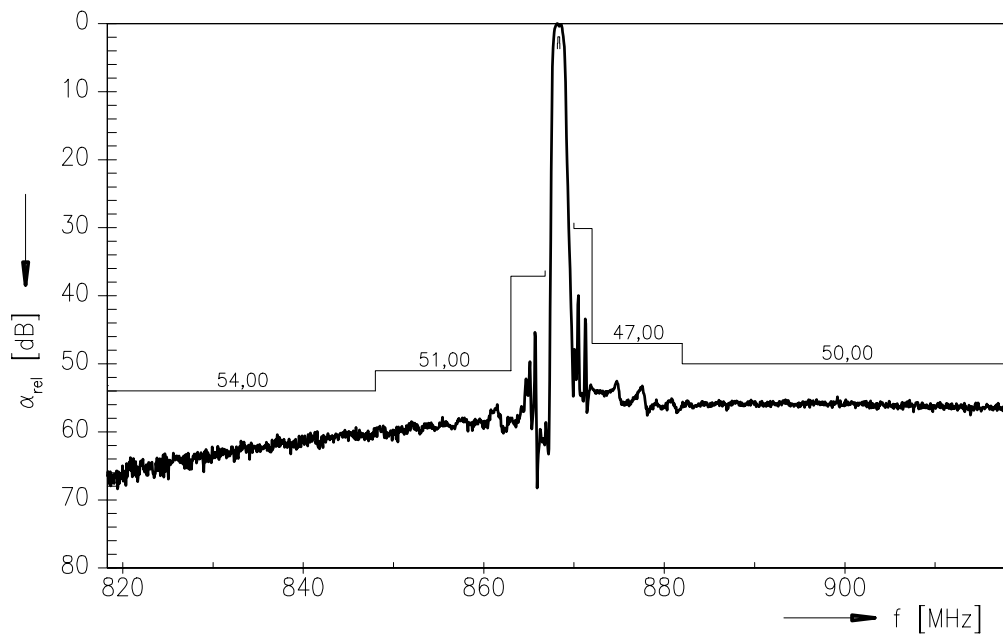



<b>SAW Components</b>	<b>B3574</b>
<b>Low Loss Filter</b>	<b>868,30 MHz</b>
<b>Data Sheet</b>	

**Published by EPCOS AG**  
**Surface Acoustic Wave Components Division, SAW CE AE**  
**P.O. Box 80 17 09, 81617 Munich, GERMANY**

©.EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.