

## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)  
[72933](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

# Pomona<sup>®</sup> ELECTRONICS

## Model 72933 Broadcast BNC Adapter Kit

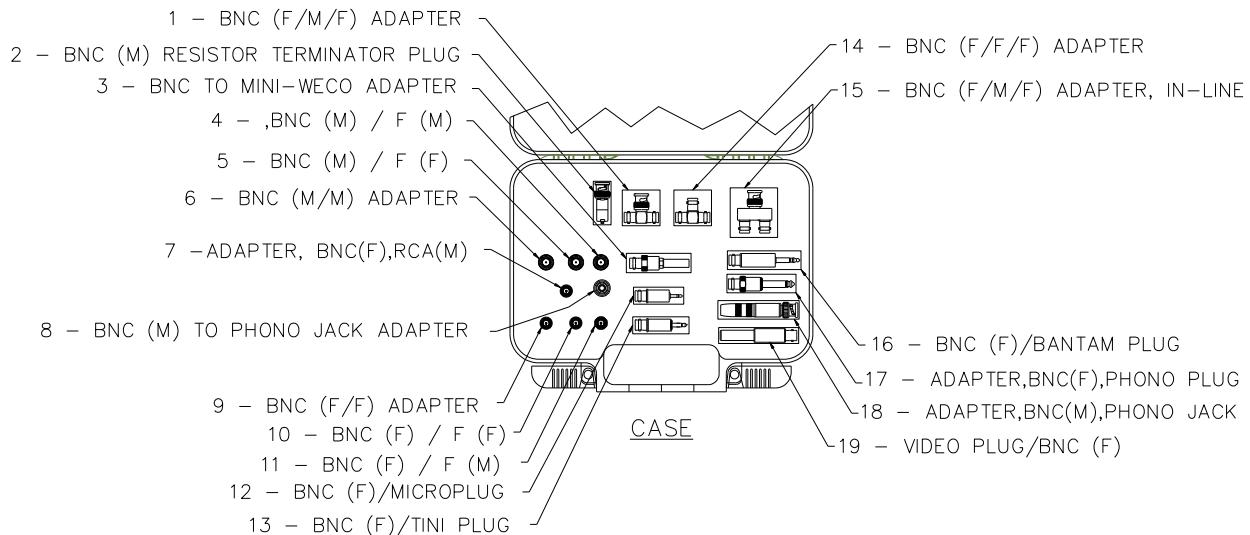

### Features:

- Kit includes the most frequently used 75 ohm adapters for Broadcast and other applications.
- All 19 adapters in kit are direct. **No intermediate couplers.**
- Reduced signal loss in adapters due to absence of couplers.
- Kit includes the most frequently used Broadcast adapters including BNC / BNC, BNC / F, BNC / RCA, BNC / Phono, and more. See complete list in table below.
- Rugged, lockable, pistol-grip case.
- All parts precision machined brass with tarnish resistant gold or nickel plating.
- Male center pins are gold plated brass.
- Female contacts are gold plated heat treated beryllium copper.
- Insulation material is PTFE.



**Order Example: 72933  
(Broadcast BNC Adapter Kit)**

All dimensions are in inches. Tolerances (except noted): .xx =  $\pm .02$ " (.51 mm), .xxx =  $\pm .005$ " (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Support: 800-241-2060 (technicalsupport@pomonatest.com)  
For "Where to Buy" information, visit the Pomona web site at [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

# Pomona<sup>®</sup>

ELECTRONICS

## Model 72933 Broadcast BNC Adapter Kit

Item	Description	Part Number	NOM. IMPEDANCE	FREQ. RANGE	VSWR	OPERATING TEMP
1	BNC female/male/female ADAPTER	6739	75 Ohm	DC to 4 GHz	1.35	- 65 to +165 C
2	BNC male RESISTOR TERMINATOR PLUG	3840-75	75 Ohm	DC to 500 MHz	1.35	Specified 0° to 70° C. Derates up to 150° C
3	BNC TO MINI-WECO ADAPTER	6519	75 Ohm	DC to 1 GHz	1.35	- 65 to +165 C
4	BNC male F male	6782	75 Ohm	DC to 1.5 GHz	1.50	- 40 to +149 F
5	BNC male F female	6779	75 Ohms	DC to 1.5 GHz	1.50	- 40 to +149 F
6	BNC male/male ADAPTER	6740	75 Ohm	DC to 3 GHz	1.35	- 65 to +155 C
7	BNC female RCA male	5319	50 Ohm	NS	NS	- 65 to +155 C
8	BNC male TO PHONO JACK ADAPTER	4054	75 Ohm	DC to 1.5 GHz	1.35	- 65 to +165 C
9	BNC female/female ADAPTER	6737	75 Ohm	DC to 3.000 MHz	1.35	- 65 to +155 C
10	BNC female F female	6780	75 Ohm	DC to 1.5 GHz	1.50	- 40 to +149 F
11	BNC female F male	6781	75 Ohm	DC to 1.5 GHz	1.50	- 40 to +149 F
12	BNC female/MICROPLUG	4267	50 Ohm	NS	NS	- 65 to +155 C
13	BNC female TINI PLUG	3837	50 Ohm	NS	NS	- 65 to +155 C
14	BNC female/female/female ADAPTER	6738	75 Ohm	DC to 3 GHz	1.35	- 65 to +155 C
15	BNC female/male/female ADAPTER	6754	75 Ohm	DC to 3 GHz	1.35	- 65 to +165 C
16	BNC female BANTAM PLUG	4719A	50 Ohm	NS	NS	122° F max
17	ADAPTER, BNC f, PHONO PLUG	1297	50 Ohm	NS	NS	125° C max
18	ADAPTER, BNC male PHONO JACK	4043	50 Ohm	NS	NS	125° C max
19	VIDEO PLUG BNC female	5008	75 Ohm	NS	NS	102° C max

All dimensions are in inches. Tolerances (except noted): .xx =  $\pm .02"$  (.51 mm), .xxx =  $\pm .005"$  (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Support: 800-241-2060 (technicalsupport@pomonatest.com)  
 For "Where to Buy" information, visit the Pomona web site at [www.pomonaelectronics.com](http://www.pomonaelectronics.com)