

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Omron Automation & Safety](#)
[E39-L52](#)

For any questions, you can email us directly:

sales@integrated-circuit.com




Analog Photoelectric Sensor

E3SA

Analog Output Proportional to Light Received, Ideal For Inspection and Measurement

- Analog object detection ideal for position, size, color and surface characteristics
- Both analog and NPN transistor ON/OFF outputs available simultaneously
- Fast, 1 ms response time
- Selectable Light-ON/Dark-ON operation
- 4-turn sensitivity adjustment for precise control
- 2 m (6.56 ft) cable

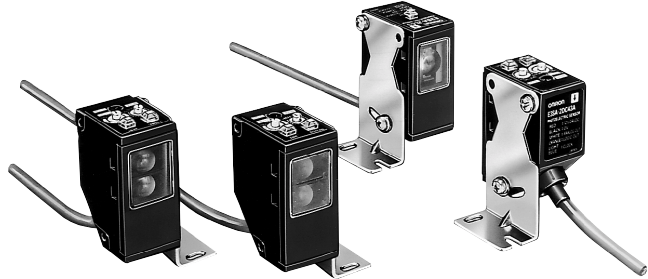

Ordering Information

■ SENSORS

Method of detection	Through-beam	Retroreflective	Diffuse reflective	Mark sensor
Sensing distance	2 m (6.56 ft), 30 cm (11.81 in) with E39-S1 slits	20 to 50 cm (7.87 to 19.68 in)	5 to 50 cm (1.97 to 19.68 in)	2 to 5 cm (0.79 to 1.97 in)
Part number	E3SA-2C43A	E3SA-RS50C43A	E3SA-DS50C43A	E3SA-VS5RC43A

■ ACCESSORIES

Description	Part number
Slits for E3SA-2C43A through-beam type help detect transparent and small objects (0.5, 1, 2 and 4 mm slits; mounting hardware)	E39-S1

■ REPLACEMENT PARTS

Description	Part number
Reflector (supplied with E3SA-RS50C43A retroreflective sensor)	E39-R1
Mounting bracket (supplied with each sensor)	E39-L52


E3SA **OMRON** **E3SA**

Specifications


Part number		E3SA-2C43A	E3SA-RS50C43A	E3SA-DS50C43A	E3SA-VS5RC43A
Method of detection		Through-beam	Retroreflective	Diffuse reflective	Mark sensor
Supply voltage		12 to 24 VDC			
Operating voltage		10.8 to 26.4 VDC; ripple 10% max. peak-to-peak			
Current consumption		Emitter: 60 mA max. Receiver: 20 mA max.	80 mA max.		
Sensing distance		2 m (6.56 ft) 30 cm (11.81 in) with E39-S1 slits	20 to 50 cm (7.87 to 19.68 in) with E39-R1 reflector (supplied)	5 to 50 cm (1.97 to 19.68 in) with 10 x 10 cm (3.94 x 3.94 in) white mat paper	2 to 5 cm (0.79 to 1.97 in) with 3 x 3 mm (0.12 x 0.12 in) black mark on white background
Light source (continuous)		Red LED 660 nm	Polarized infrared LED	Infrared LED 950 nm	Red LED 680 nm
Light source disable input (check input)		Provided Contact closure or high solid-state input shorts power to LED; 4 V max., 2.3 mA min. source current	Not provided	Not provided	Not provided
Detectable object type		Opaque materials	Opaque materials	Opaque and transparent materials	
Operation mode		Light-ON/Dark-ON, switch selectable			
Sensitivity		Adjustable; 4-turn potentiometer			
Operating point		Adjustable; 4-turn potentiometer			
Control output	Type	Analog	4 to 20 mA with 300 Ω max. load impedance; 2.45 to 4 mA minimum, 20 to 21.55 mA maximum 1 to 5 VDC using 250 Ω resistor supplied. See "Connections" for conversion.		
		On/Off	NPN, open collector; max., load 100 mA, 30 VDC		
Response time	On	1 ms max.			
	Off	1 ms max.			
Variation due to temperature fluctuations		±0.3% of full scale/°C			
Circuit protection	Output short-circuit	Provided			
	DC power supply reverse polarity	Provided			
Indicators		Emitter: Power On (red LED) Receiver: Light Incident (red LED) Output Operation (yellow LED)	Light Incident (red LED) Output Operation (yellow LED)		
Materials	Lens	Plastic			
	Case	Plastic			
	Cable sheath	Plastic			
Mounting		Side surface mount with two through holes. E39-L52 bracket and mounting hardware supplied.			
Connections	Prewired	Emitter: 2-conductor cable, 2 m (6.56 ft) length	4-conductor cable, 2 m (6.56 ft) length		
		Receiver: 5-conductor cable, 2 m (6.56 ft) length			
Weight		Emitter: 140 g (5 oz) Receiver: 140 g (5 oz)	140 g (5 oz)		
Enclosure	IEC 144	IP66			
Ambient temperature	Operating	-10°C to 55°C (14°F to 131°F)			
	Storage	-30°C to 70°C (-22°F to 159°F)			

OUTPUT CIRCUIT DIAGRAM

Through-Beam Type E3SA-2C43A

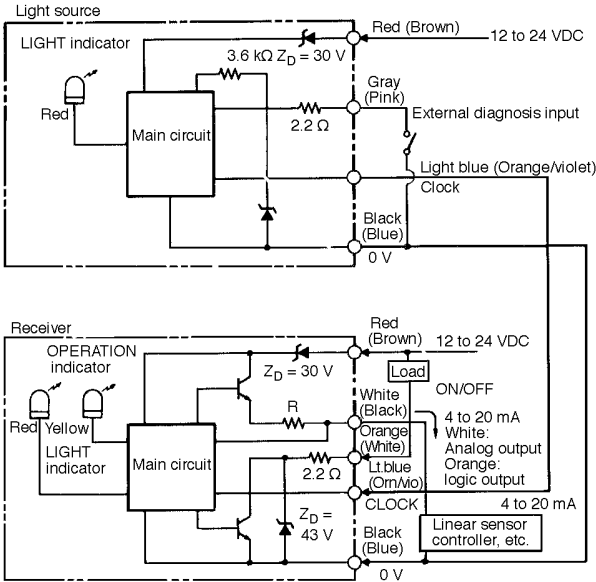


Polarized Retroreflective Type E3SA-RS50C43A
Diffuse Reflective Type E3SA-DS50C43A
Mark Sensor E3SA-VS5RC43A
Fiber-Optic Amplifier E3XA-CC4A

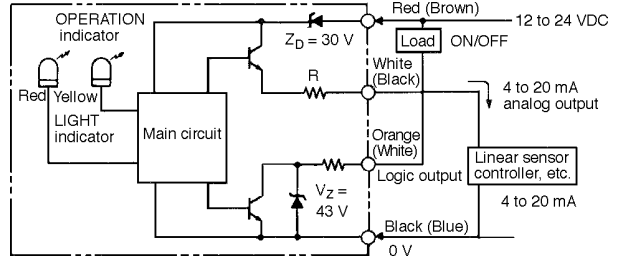

Note: IEC colors are shown in parentheses.


TIMING CHARTS

Through-Beam Type E3SA-2C43A

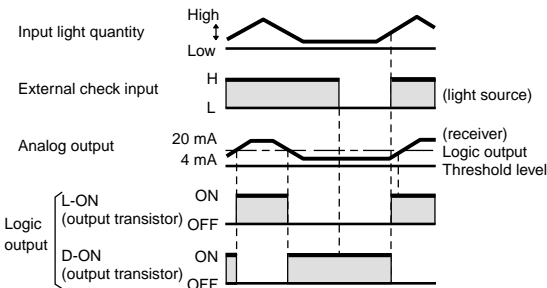

Note: The light source operates (ON) when the external check input is open; it does not operate (OFF) when the external check input is ON (Low).


Polarized Retroreflective Type E3SA-RS50C43A
Diffuse Reflective Type E3SA-DS50C43A
Mark Sensor E3SA-VS5RC43A
Fiber-Optic Amplifier E3XA-CC4A

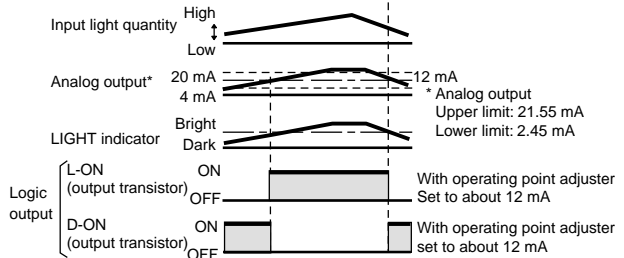


E3SA **OMRON** **E3SA**

Connections

Through-Beam Type E3SA-2C43A

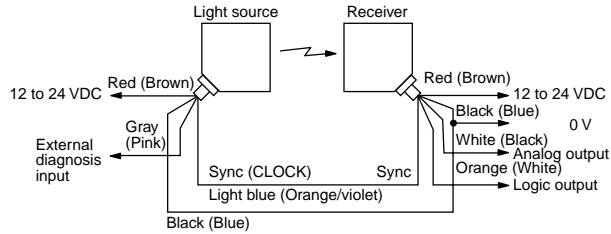


Polarized Retroreflective Type E3SA-RS50C43A Diffuse Reflective Type E3SA-DS50C43A Mark Sensor E3SA-VS5RC43A

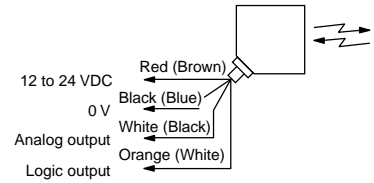

Note: IEC colors are shown in parentheses.

For voltage output (1 to 5 VDC)


To convert current output into voltage output (1 to 5 VDC), use the 250-ohm resistor, supplied with the sensor.

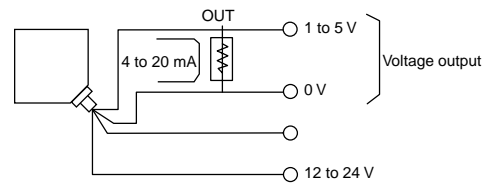


Engineering Data

OPERATING RANGE


Through-Beam Type E3SA-2C43A without slit

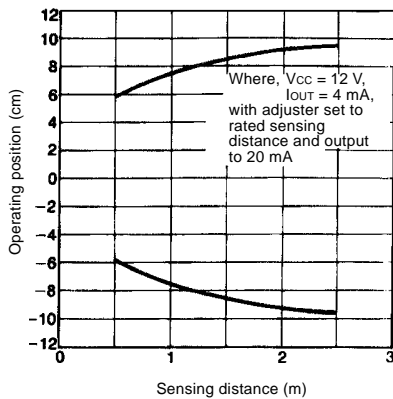

Polarized Retroreflective Type E3SA-RS50C43A

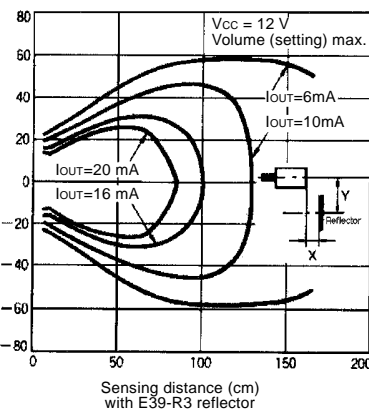


Diffuse Reflective Type E3SA-DS50C43A

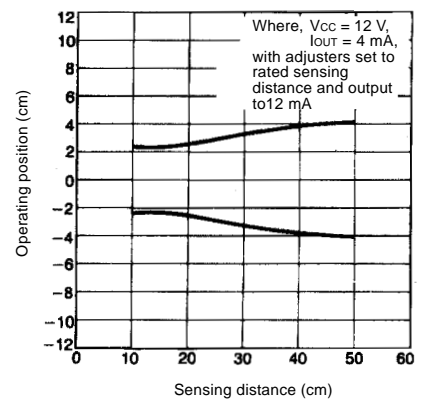


■ **DISTANCE vs. ANALOG OUTPUT CURRENT**


Through-Beam Type
E3SA-2C43A without slit

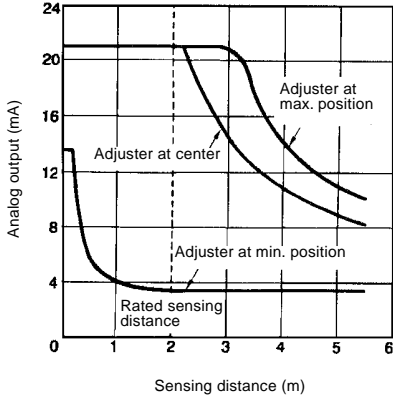


Through-Beam Type
E3SA-2C43A with slit

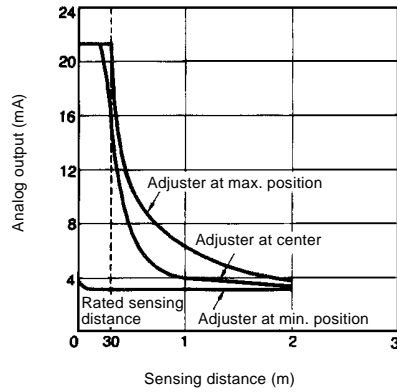


Polarized Retroreflective Type
E3SA-RS50C43A

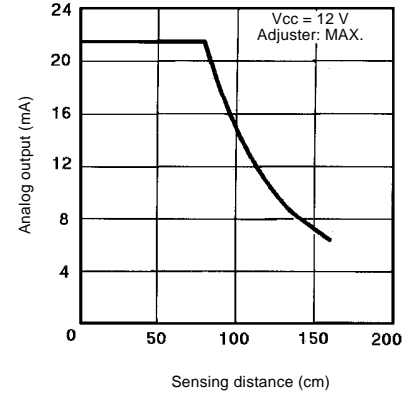


Diffuse Reflective Type
E3SA-DS50C43A (white object)

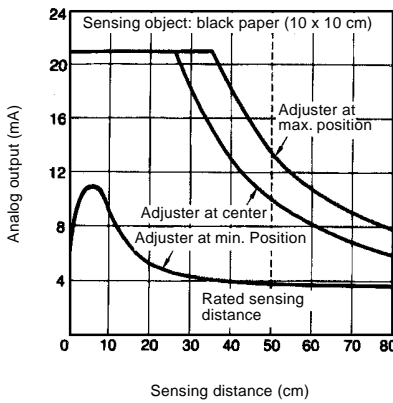

Diffuse Reflective Type
E3SA-DS50C43A (black object)

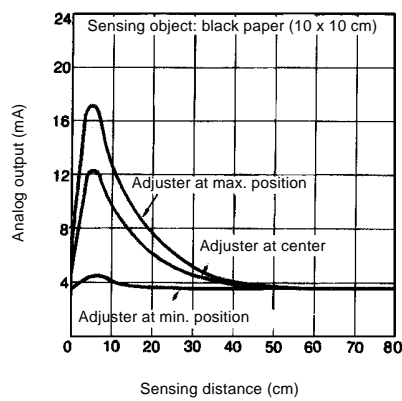


Mark Sensor Type E3SA-VSRC43A

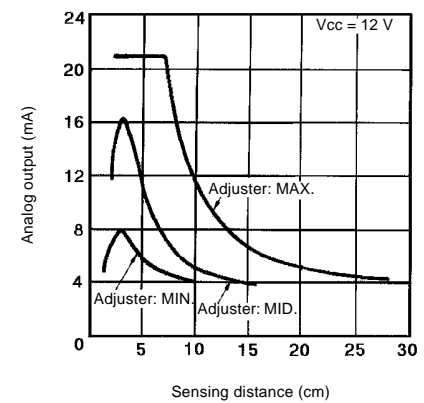


■ **OBJECT SIZE vs. OUTPUT**


Diffuse Reflective Type
E3SA-DS50C43A

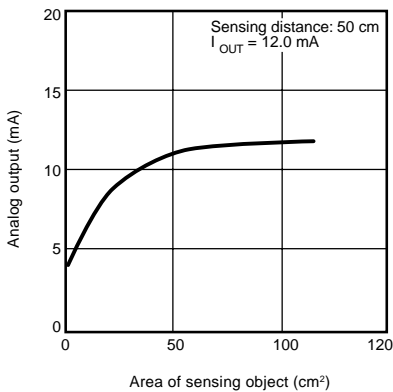

Diffuse Reflective Type
E3SA-DS50C43A

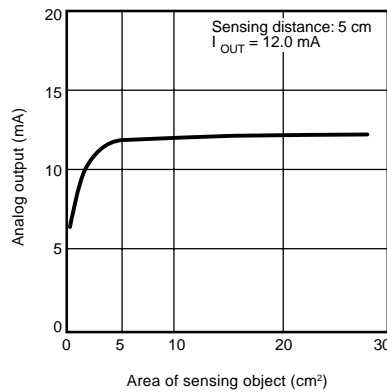


Mark Sensor Type E3SA-VSRC43A

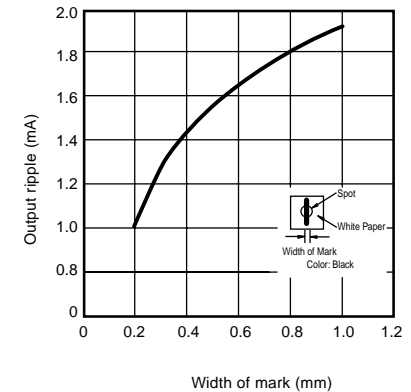


E3SA **OMRON** **E3SA**

Polarized Retroreflective Type
E3SA-RS50C43A

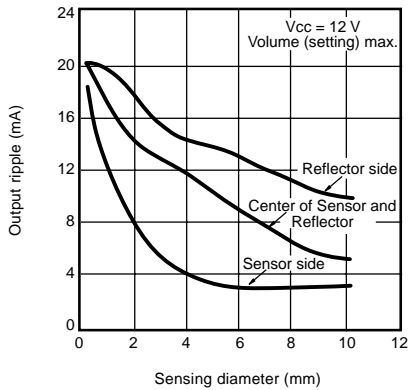


■ LIGHT INTERRUPTING CHARACTERISTICS


Through-Beam Type E3SA-2C43A Without Slit, in Y Direction

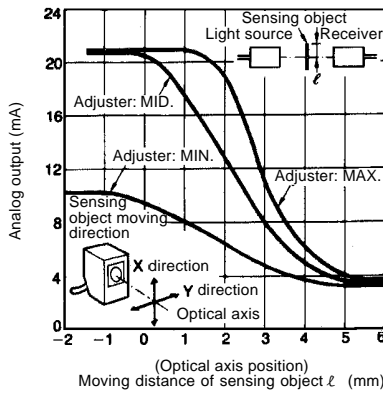


Through-Beam Type E3SA-2C43A Without Slit, in X Direction

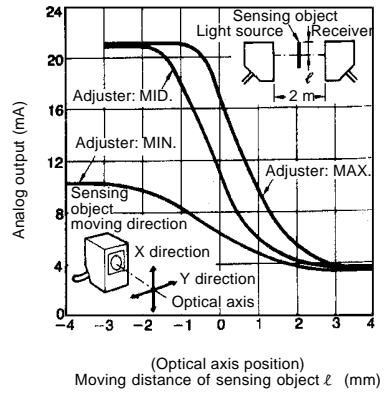

Through-Beam Type E3SA-2C43A With Slit, in Y Direction

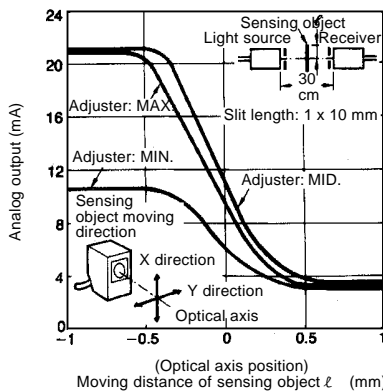


Through-Beam Type E3SA-2C43A With Slit, in X Direction

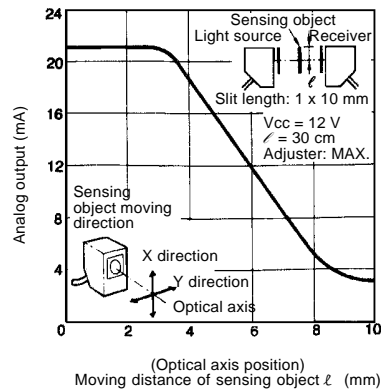


MUTUAL INTERFERENCE


If sensors are installed side by side, provide at least the minimum distance shown in the shaded region of the following charts between sets of fibers to prevent mutual interference.



**Through-Beam Type
E3SA-2C43A Without Slit**

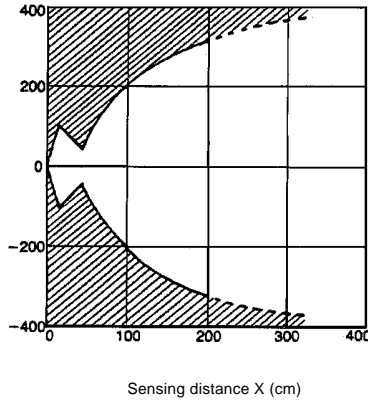


**Through-Beam Type
E3SA-2C43A With Slit**

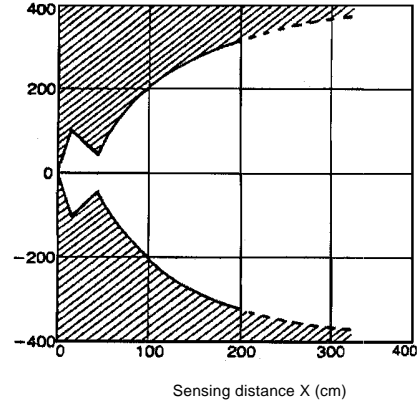


INFLUENCE OF EXTERNAL LIGHT INTERFERENCE


**Through-Beam Type
E3SA-2C43A Without Slit**

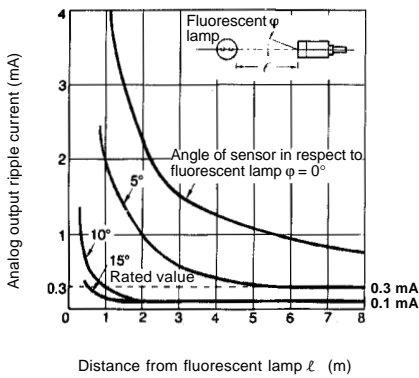


**Through-Beam Type
E3SA-2C43A With Slit**

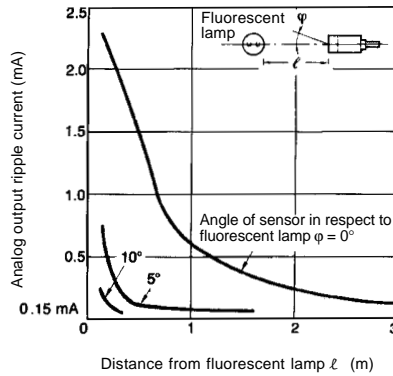


**Retroreflective Type
E3SA-RS50C43A**

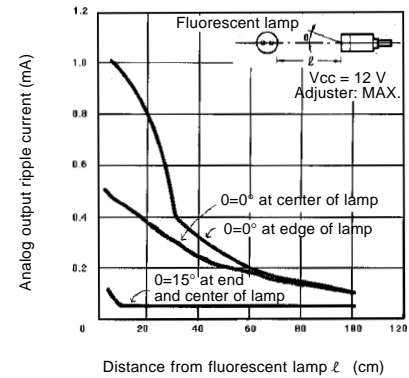

**Diffuse Reflective Type
E3SA-DS50C43A**

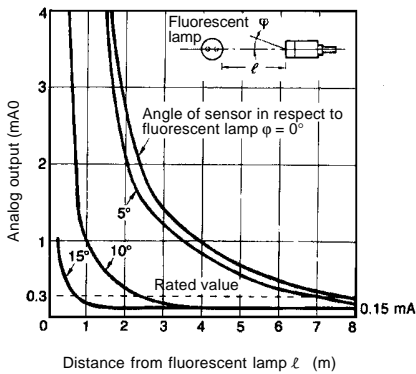

**Diffuse Reflective Type
E3SA-VS5RC43A**

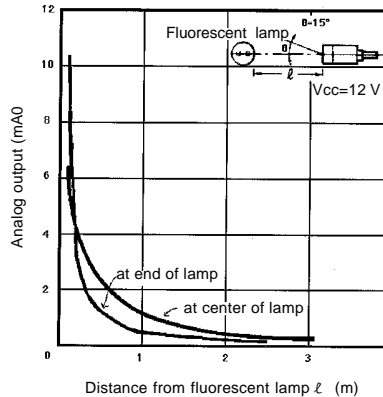


E3SA

OMRON

E3SA


■ **TRANSPARENCY AND COLOR vs. ANALOG OUTPUT**

Through-Beam Type E3SA-2C43A Without Slit

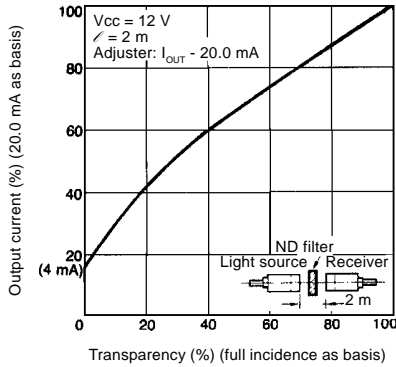


■ **COLOR MARK DETECTION CAPABILITY**

Mark Sensor Type E3SA-VS5RC43A

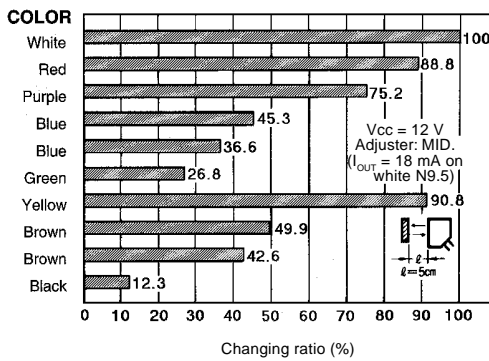



Diffuse Reflective Type E3SA-DS5C43A

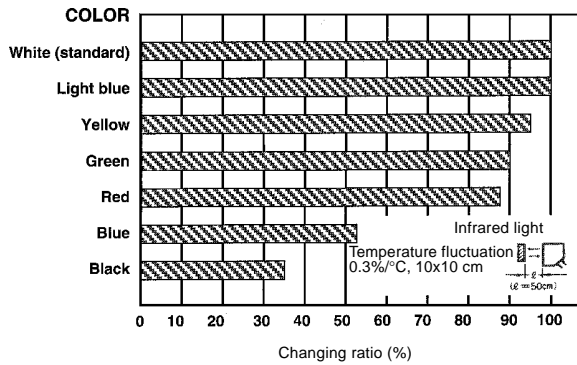


Dimensions

Unit: mm (inch)

Through-Beam Type E3SA-2C43A

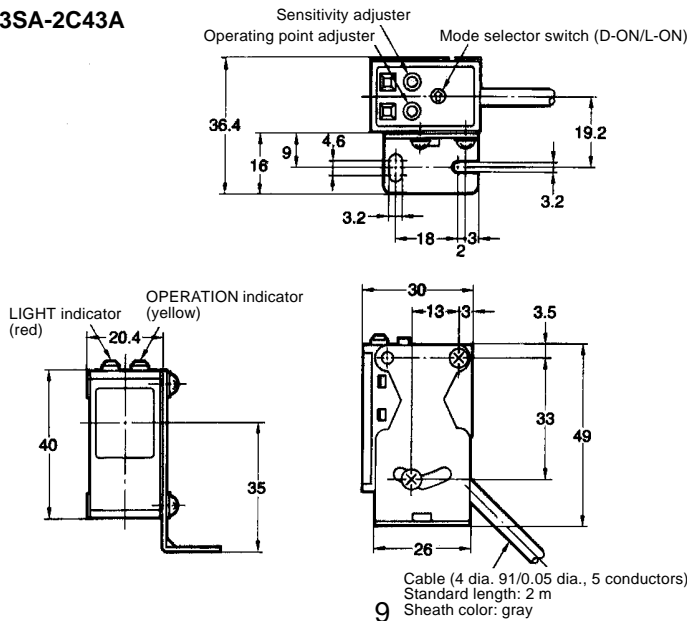

Mounting holes



E3SA




OMRON

E3SA

Retroreflective Type E3SA-RS50C43A (included E39-R1 reflector)


Diffuse Reflective Type E3SA-DS50C43A

Mark Sensor E3SA-VS5RC43A



Cable (3.8 dia. 91/0.05 dia., 4 conductors)
Standard length: 2 m
Sheath color: gray


Mounting holes



■ REFLECTORS


E39-R1 Reflector supplied with each

E3SA-RS50C43A Retroreflective Sensor

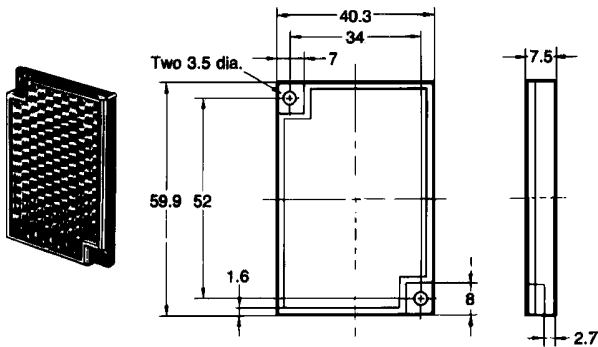

Operation

■ NOMENCLATURE

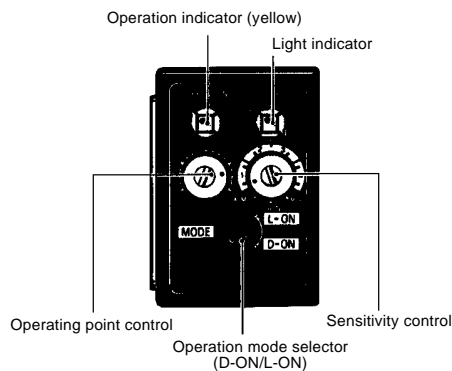

E3SA

OMRON

E3SA

■ ADJUSTMENTS

For Through-Beam and Retroreflective Sensors

Using Indication:

Mount the emitter or reflector, then loosely mount the receiver. Aim the receiver to get the maximum brightness on the Light Indicator. Adjust the Sensitivity Control (gain) to maximize the brightness. Then securely mount the receiver to maintain the position.

Using Analog Output:

Use an ammeter to measure the milliamp current output from the sensor. Mount the emitter or reflector, then loosely mount the

receiver. Aim the receiver to get the maximum analog output (20 mA). Move the receiver up and down, left to right to determine the area that produces maximum output. Aim the receiver in the center of that area then securely mount the receiver to maintain the position. Adjust the gain using the Sensitivity Control to produce 20 mA or the desired maximum current output.

To ensure proper adjustment for best sensitivity, be certain that the current has not become saturated above the 20 mA

maximum limit. This makes normal detection impossible because the deviation of output at saturation becomes too small for differentiation.

The Easy Method:

The simple way is to use the Operation Point control. Set the operating point at 20 mA (fully clockwise), then search for the position that turns on the Operation Indicator.

For Diffuse Reflective Sensors

Using Indication:

Securely mount the diffuse reflective or mark detecting sensor, or diffuse reflective fiber-optic sensing head. Place the object to be detected at the position where detection should occur. Adjust the Sensitivity Control (gain) to the point where the Operation Indicator lights. Then fine-tune the gain to maximize the brightness of the Light Indicator.

Using Analog Output:

Securely mount the diffuse reflective or mark detecting sensor, or diffuse reflective fiber-optic sensing head. Use an ammeter to measure the milliamp output from the sensor or E3XA amplifier. Place the object to be detected at the position where detection should occur. Adjust the gain using the Sensitivity Control to produce

20 mA or the desired maximum current output.


To ensure proper adjustment for best sensitivity, be certain that the current has not become saturated above the 20 mA maximum limit. This makes normal detection impossible because the deviation of output at saturation becomes too small for differentiation.

■ INFLUENCE OF FLUORESCENT LIGHTING


Do not allow direct exposure of fluorescent light on the receiver (through-beam types) or emitter/receiver (reflective types). This may have adverse affects on the analog output current.

When mounting the sensor, keep the angle formed between the light of the fluorescent lamp and the optical axis of the sensor at more than 15 degrees.

CORRECT

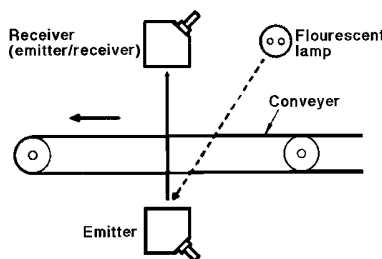

INCORRECT

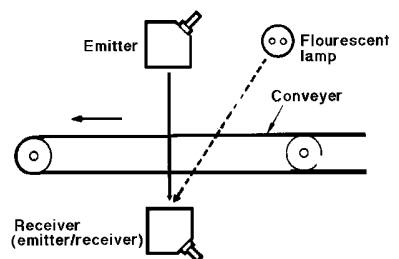

■ AMPLIFIER OUTPUTS

Analog Output

Set the analog output by allowing a hysteresis of more than 2% full scale (about 0.3 mA), also taking into account the effects of external fluctuations. This effect is already taken into account when using S3A-D and S3A2 analog sensor controllers.

Logic (On/Off) Output

The differential for the discrete On/Off logic output is set at about 2 mA. Output short-circuit protection is provided.



Distributor of Omron Automation & Safety: Excellent Integrated System Limited

Datasheet of E39-L52 - BRACKET FOR E3SA

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

E3SA **OMRON** **E3SA**

OMRON

OMRON ELECTRONICS LLC

One East Commerce Drive
Schaumburg, IL 60173

1-800-55-OMRON

Cat. No. CEDSAX4

11/01

OMRON ON-LINE

Global - <http://www.omron.com>

USA - <http://www.omron.com/oei>

Canada - <http://www.omron.com/oci>

Specifications subject to change without notice.

OMRON CANADA, INC.

885 Milner Avenue
Scarborough, Ontario M1B 5V8

416-286-6465

Printed in the U.S.A.