

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Eaton \(formerly Cooper Bussmann\)](#)  
[FWK-10A20F](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

Ferrule

## FWK 750V 5-60A

Electrical Characteristics				Ordering Information				Dimensions	Curves	
Size	Rated Current RMS-Amps	I <sup>2</sup> t (A <sup>2</sup> S)		Watts Loss	Part Number	Carton Qty.	Carton Weight (kg)	Figure Number	BIF #	
		Pre-arc	Clearing at 750 Vdc							
20 × 127mm (13/16")	5	8.5	16	—	FWK-5A20F	10	0.95	Fig. 1	35785031	
	8	50	100	—	FWK-8A20F					
	10	95	200	—	FWK-10A20F					
	15	100	240	—	FWK-15A20F					
	20	125	315	—	FWK-20A20F					
	25	400	1100	—	FWK-25A20F					
	30	800	2600	—	FWK-30A20F					
25 × 146mm (1")	35	1300	4300	—	FWK-35A25F	10	1.65	Fig. 2		
	40	1600	5300	—	FWK-40A25F					
	50	3100	12000	—	FWK-50A25F					
	60	5900	24000	—	FWK-60A25F					

■ Interrupting rating 45kA RMS symmetrical.

■ 750 Vdc rating for 5 through 60 amperes (Time constant = 10-15 mS).

1 kg = 2.2 lbs. 1 lb = 0.45 kg

### Dimensions

Fig. 1: 5-30 Amp Range


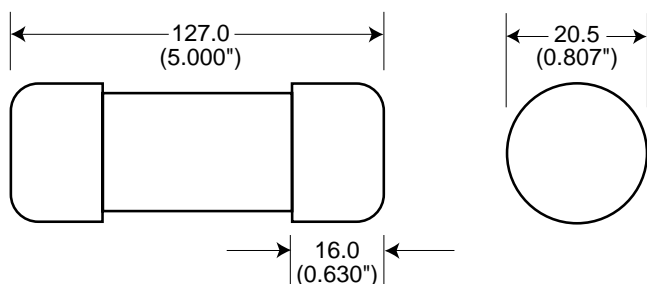


Fig. 2: 35-60 Amp Range

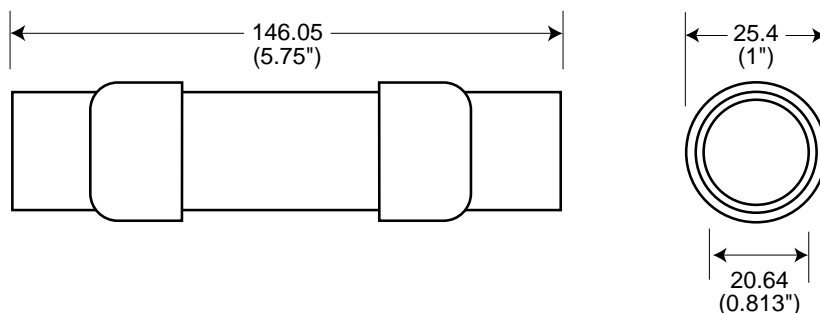

Dimension in mm.  
1mm = 0.0394" 1" = 25.4mm

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.