

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Powerex Inc.](#)  
[M81701FP](#)



For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**M81701FP**

**HVIC**  
**High Voltage Integrated Circuit**  
**600 Volts/±2 Amperes**

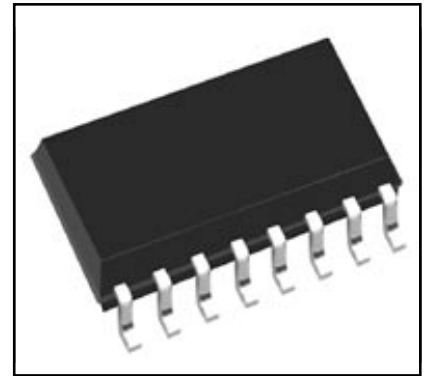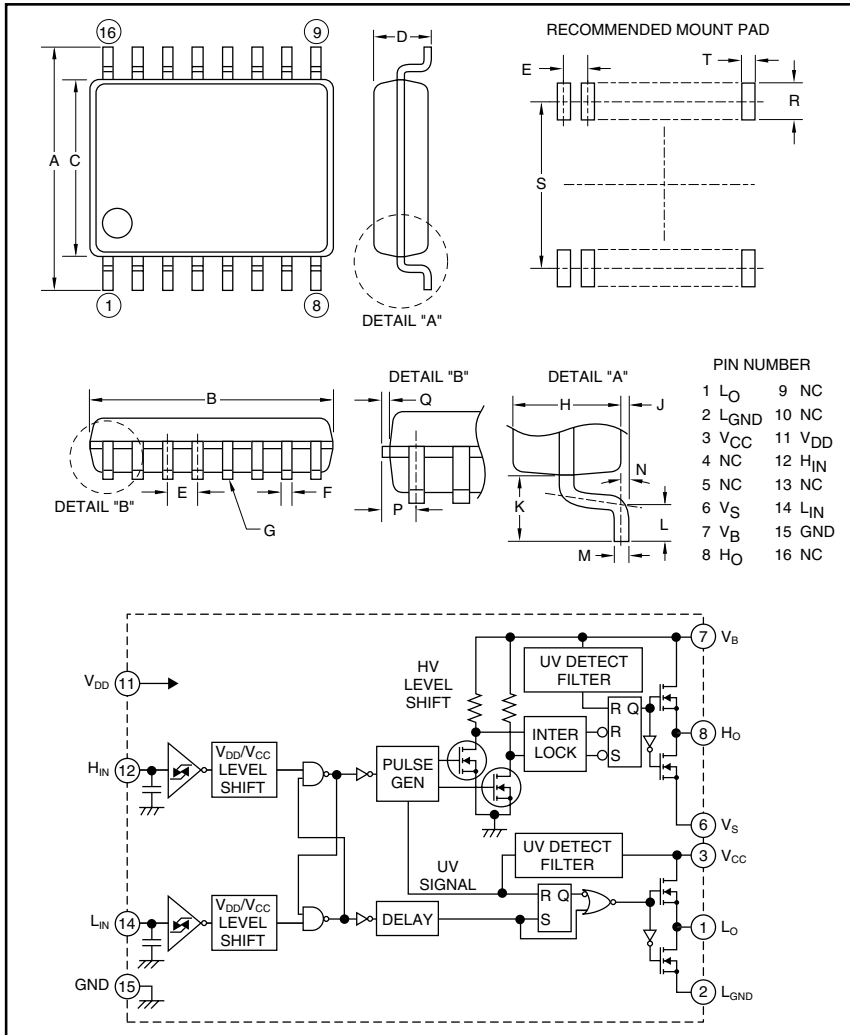

**Description:**  
 M81701FP is a high voltage Power MOSFET and IGBT module driver for half-bridge applications.

- Features:**
- Floating Supply Voltage
  - Output Current
  - Half-Bridge Driver
  - SOP-16

- Applications:**
- HID
  - PDP
  - MOSFET Driver
  - IGBT Driver
  - Inverter Module Control

**Ordering Information:**  
 M81701FP is a ±2 Ampere, 600 Volt HVIC, High Voltage Integrated Circuit

**Outline Drawing and Circuit Diagram**

Dimensions	Inches	Millimeters
A	0.31±0.01	7.8±0.3
B	0.41±0.004	10.1±0.1
C	0.21±0.004	5.3±0.1
D	0.12	2.10
E	0.05	1.27
F	0.02±0.002	0.4±0.05
G	0.004	0.1
H	0.07	1.8
J	0.01±0.004	0.1±0.1

Dimensions	Inches	Millimeters
K	0.05	1.25
L	0.024±0.008	0.6±0.2
M	0.1±0.002	0.2±0.05
N	4°±4°	4°±4°
P	0.03 Max.	0.755 Max.
Q	0.006	0.15
R	0.05 Min.	Min. 1.27
S	0.30	7.62
T	0.029	0.76



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272


**M81701FP**  
**HVIC, High Voltage Integrated Circuit**  
 600 Volts/±2 Amperes

**Absolute Maximum Ratings,  $T_a = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	M81701FP	Units
High Side Floating Supply Absolute Voltage	$V_B$	-0.5 ~ 624	Volts
High Side Floating Supply Offset Voltage	$V_S$	-0.5 ~ 600	Volts
High Side Floating Supply Voltage ( $V_{BS} = V_B - V_S$ )	$V_{BS}$	-0.5 ~ 24	Volts
Allowable Offset Supply Voltage Minus Surge ( $P_W < 1\mu\text{s}$ )	$-V_S$	-5	Volts
High Side Output Voltage	$V_{HO}$	$V_S - 0.5 \sim V_B + 0.5$	Volts
Low Side Fixed Supply Voltage	$V_{CC}$	-0.5 ~ 24	Volts
Low Side Output Voltage	$V_{LO}$	-0.5 ~ $V_{CC} + 0.5$	Volts
Logic Supply Voltage	$V_{DD}$	-0.5 ~ 24	Volts
Logic Input Voltage ( $H_{IN}, L_{IN}$ )	$V_{IN}$	-0.5 ~ $V_{DD} + 0.5$	Volts
Low Side Return Offset Voltage ( $V_{CC} - L_{GND} < 24\text{V}$ )	$L_{GND}$	-5 ~ $V_{CC} + 0.5$	Volts
Allowable Offset Supply Voltage Transient	$dV_S/dt$	±50	V/ns
Package Power Dissipation ( $T_a = 25^\circ\text{C}$ , On Board)	$P_d$	0.88	Watts
Linear Derating Factor ( $T_a > 25^\circ\text{C}$ , On Board)	$K_\theta$	-8.8	mW/°C
Junction to Case Thermal Resistance	$R_{th(j-c)}$	50	°C/W
Junction Temperature	$T_j$	-20 ~ 125	°C
Operation Temperature	$T_{opr}$	-20 ~ 75	°C
Storage Temperature	$T_{stg}$	-40 ~ 125	°C

**Recommended Operating Conditions**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
High Side Floating Supply Absolute Voltage	$V_B$		$V_S + 10$	—	$V_S + 20$	Volts
High Side Floating Supply Offset Voltage	$V_S$		0	—	500	Volts
High Side Floating Supply Voltage	$V_{BS}$	$V_{BS} = V_B - V_S$	10	—	20	Volts
Low Side Fixed Supply Voltage	$V_{CC}$		10	—	20	Volts
Logic Supply Voltage	$V_{DD}$		5	—	20	Volts
Logic Input Voltage	$V_{IN}$	$H_{IN}, L_{IN}$	0	—	$V_{DD}$	Volts
Low Side Return Offset Voltage	$L_{GND}$		-5	—	5	Volts

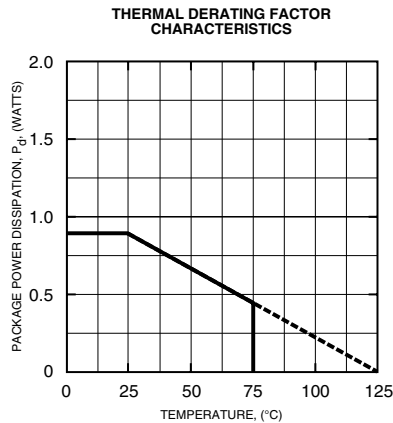



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**M81701FP**  
**HVIC, High Voltage Integrated Circuit**  
 600 Volts/±2 Amperes

### Electrical Characteristics

$T_a = 25^\circ\text{C}$ ,  $V_{CC} = V_{BS} (= V_B - V_S) = V_{DD} = 15\text{V}$ ,  $L_{GND} = 0\text{V}$  unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Floating Supply Leakage Current	$I_{FS}$	$V_B = V_S = 600\text{V}$	—	—	1	$\mu\text{A}$
$V_{BS}$ Standby Current	$I_{BS}$		—	0.4	0.7	mA
$V_{CC}$ Standby Current	$I_{CC}$		—	0.75	1.5	mA
$V_{DD}$ Standby Current	$I_{DD}$		—	—	10	$\mu\text{A}$
High Level Output Voltage	$V_{OH}$	$I_O = 0\text{A}$ , $L_O$ , $H_O$	13.8	14.4	—	Volts
Low Level Output Voltage	$V_{OL}$	$I_O = 0\text{A}$ , $L_O$ , $H_O$	—	—	0.1	Volts
High Level Input Threshold Voltage	$V_{IH15}$	$H_{IN}$ , $L_{IN}$	—	8.4	9.5	Volts
Low Level Input Threshold Voltage	$V_{IL15}$	$H_{IN}$ , $L_{IN}$	6.0	6.8	—	Volts
High Level Input Threshold Voltage	$V_{IH5}$	$H_{IN}$ , $L_{IN}$ ( $V_{DD} = 5\text{V}$ )	—	3.1	4.1	volts
Low Level Input Threshold Voltage	$V_{IL5}$	$H_{IN}$ , $L_{IN}$ ( $V_{DD} = 5\text{V}$ )	1.4	2.4	—	Volts
High Level Input Bias Current	$I_{IH}$	$V_{IN} = 15\text{V}$	—	75	150	$\mu\text{A}$
Low Level Input Bias Current	$I_{IL}$	$V_{IN} = 0\text{V}$	—	—	1.0	$\mu\text{A}$
$V_{BS}$ Supply UV Reset Voltage	$V_{BSuvr}$		7.5	8.6	9.7	Volts
$V_{BS}$ Supply UV Hysteresis Voltage	$V_{BSuvh}$		0.1	0.4	0.7	Volts
$V_{BS}$ Supply UV Filter Time	$t_{VBSuv}$		—	10	—	$\mu\text{s}$
$V_{CC}$ Supply UV Reset Voltage	$V_{CCuvr}$		7.5	8.6	9.7	Volts
$V_{CC}$ Supply UV Hysteresis Voltage	$V_{CCuvh}$		0.1	0.4	0.7	Volts
$V_{CC}$ Supply UV Filter Time	$t_{VCCuv}$		—	10	—	$\mu\text{s}$
Output High Level Short Circuit Pulsed Current	$I_{OH}$	$V_O = 0\text{V}$ , $V_{IN} = 15\text{V}$ , $P_W < 10\mu\text{s}$	—	-2.5	—	Amperes
Output Low Level Short Circuit Pulsed Current	$I_{OL}$	$V_O = 15\text{V}$ , $V_{IN} = 0\text{V}$ , $P_W < 10\mu\text{s}$	—	2.5	—	Amperes
Output High Level ON Resistance	$R_{OH}$	$I_O = -200\text{mA}$ , $R_{OH} = (V_{OH} - V_O)/I_O$	—	10	13	$\Omega$
Output Low Level ON Resistance	$R_{OL}$	$I_O = 200\text{mA}$ , $R_{OL} = V_O/I_O$	—	2.5	3	$\Omega$
High Side Turn-On Propagation Delay	$t_{dLH(HO)}$	$C_L = 1000\text{pF}$ between $H_O - V_S$	—	—	350	ns
High Side Turn-Off Propagation Delay	$t_{dHL(HO)}$	$C_L = 1000\text{pF}$ between $H_O - V_S$	—	—	330	ns
High Side Turn-On Rise Time	$t_{rH}$	$C_L = 1000\text{pF}$ between $H_O - V_S$	—	—	60	ns
High Side Turn-Off Fall Time	$t_{fH}$	$C_L = 1000\text{pF}$ between $H_O - V_S$	—	—	30	ns
Low Side Turn-On Propagation Delay	$t_{dLH(LO)}$	$C_L = 1000\text{pF}$ between $L_O - \text{GND}$	—	—	350	ns
Low Side Turn-Off Propagation Delay	$t_{dHL(LO)}$	$C_L = 1000\text{pF}$ between $L_O - \text{GND}$	—	—	330	ns
Low Side Turn-On Rise Time	$t_{rL}$	$C_L = 1000\text{pF}$ between $L_O - \text{GND}$	—	—	60	ns
Low Side Turn-Off Rise Time	$t_{fL}$	$C_L = 1000\text{pF}$ between $L_O - \text{GND}$	—	—	30	ns
Delay Matching, High Side and Low Side Turn-On	$\Delta t_{dLH}$	$ t_{dLH(HO)} - t_{dLH(LO)} $	—	—	30	ns
Delay Matching, High Side and Low Side Turn-Off	$\Delta t_{dHL}$	$ t_{dHL(HO)} - t_{dHL(LO)} $	—	—	30	ns



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**M81701FP**  
**HVIC, High Voltage Integrated Circuit**  
 600 Volts/±2 Amperes

FUNCTION TABLE (X: H or L)


H <sub>IN</sub>	L <sub>IN</sub>	V <sub>BS</sub> UV	V <sub>CC</sub> UV	H <sub>O</sub>	L <sub>O</sub>	Behavioral State
L	L	H	H	L	L	LO = OFF, HO = OFF
L	H	H	H	L	H	LO = ON, HO = OFF
H	L	H	H	H	L	LO = OFF, HO = ON
H	H	H	H	*	*	
X	L	L	H	L	L	LO = OFF, HO = OFF, V <sub>BS</sub> UV tripped
X	H	L	H	L	H	LO = ON, HO = OFF, V <sub>BS</sub> UV tripped
L	X	H	L	L	L	LO = OFF, HO = OFF, V <sub>CC</sub> UV tripped
H	X	H	L	L	L	LO = OFF, HO = OFF, V <sub>CC</sub> UV tripped

Note : "L" state of V<sub>BS</sub> UV and V<sub>CC</sub> UV means that UV trip voltage.  
 \* If both input signals are "H", refer to TIMING DIAGRAM.


**TIMING DIAGRAM**

**1. Input/Output Timing Diagram**

When input signal (H<sub>IN</sub> or L<sub>IN</sub>) is "H", then output signal (H<sub>O</sub> or L<sub>O</sub>) is "H". In the case of both input signals (H<sub>IN</sub> and L<sub>IN</sub>) are "H", first coming input signal (H<sub>IN</sub> or L<sub>IN</sub>) "H" is only accepted. Corresponding this signal, output signal (H<sub>O</sub> or L<sub>O</sub>) becomes "H". Corresponding the other signal (L<sub>IN</sub> or H<sub>IN</sub>), output signal (L<sub>O</sub> or H<sub>O</sub>) keeps "L".

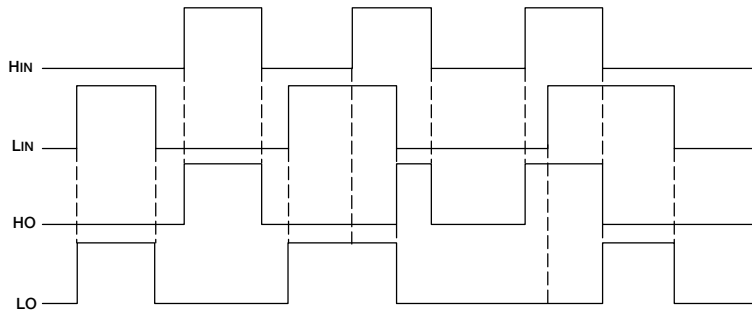

**2. V<sub>CC</sub> (V<sub>BS</sub>) Supply Under Voltage Lockout Timing Diagram**

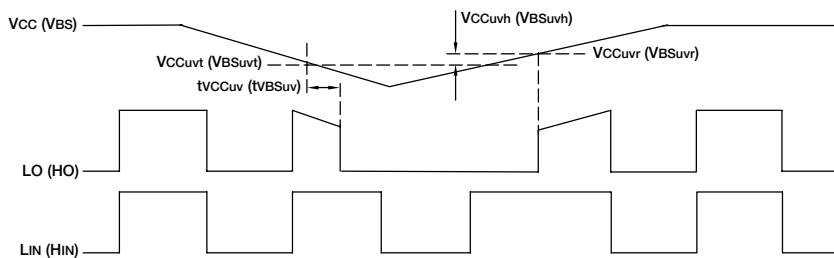

**3. Allowable Supply Voltage Transient**

Allowable high side floating supply voltage (V<sub>BS</sub>) transient or low side fixed supply voltage (V<sub>CC</sub>) transient are below 50V/μs. In case V<sub>BS</sub> or V<sub>CC</sub> are started more than 50V/μs, output signal (H<sub>O</sub> or L<sub>O</sub>) may be "H".