

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Powerex Inc.](#)
[PM75B5LA060](#)

For any questions, you can email us directly:

sales@integrated-circuit.com




Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PM75B5LA060 PM75B5LB060

Photo Voltaic IPM
H-Bridge + 1 Chopper
75 Amperes/600 Volts


Package A

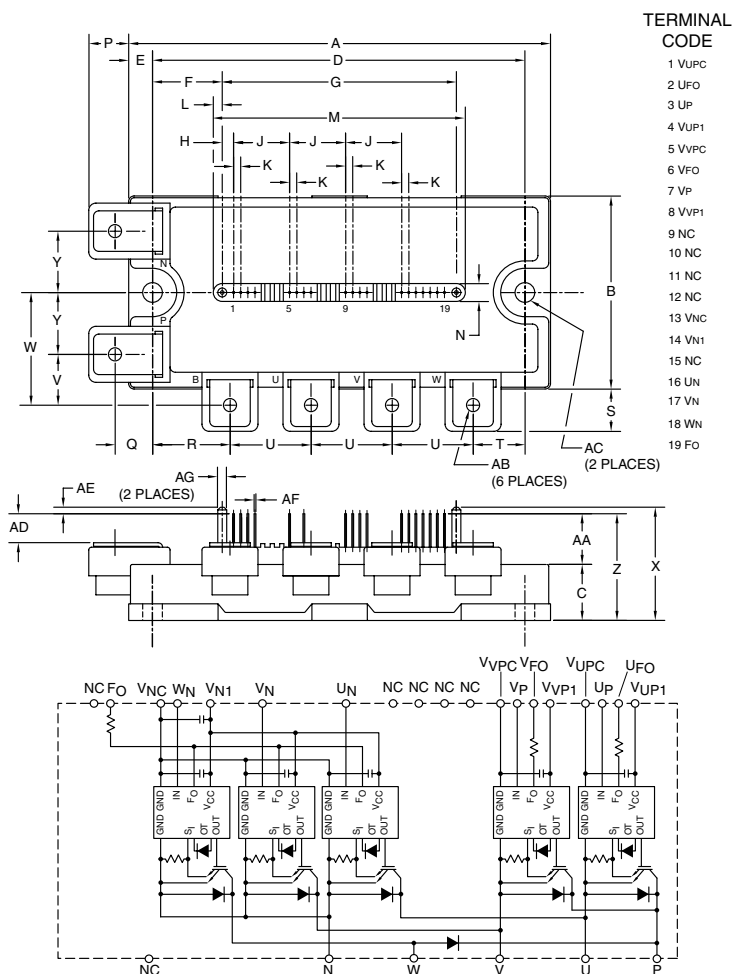

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	4.72	120.0
B	2.17	55.0
C	0.63	16.0
D	4.17	106.0
E	0.28	7.0
F	0.78	19.75
G	2.62	66.5
H	0.13	3.25
J	0.63	16.0
K	0.08	2.0
L	0.10	2.5
M	2.81	71.5
N	0.20	5.0
P	0.43	11.0
Q	0.42	10.75
R	0.87	22.0

Dimensions	Inches	Millimeters
S	0.46	11.75
T	0.59	15.0
U	0.91	23.0
V	0.57	14.5
W	1.26	32.0
X	1.22	31.0
Y	0.69	17.5
Z	1.14	29.0
AA	0.51	13.0
AB	M5 Metric	M5
AC	0.22 Dia.	Dia. 5.5
AD	0.28	7.0
AE	0.08	2.0
AF	0.02 Sq.	Sq. 0.5
AG	0.10 Dia.	Dia. 2.5

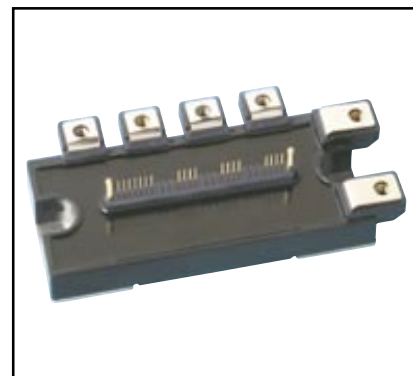

Description:

Powerex Intellimod™ 5th generation PV-IPMs are isolated base modules designed for power switching applications operating at frequencies to 30kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free-wheel diode power devices.

Features:

- ☐ Complete Output Power Circuit
- ☐ Gate Drive Circuit
- ☐ Protection Logic
 - Short Circuit
 - Over Temperature Using On-chip Temperature Sensing
 - Under Voltage
- ☐ Low Loss Using 5th Generation IGBT Chip

Applications:

- ☐ PV Inverters
- ☐ PV UPS
- ☐ PV Power Supplies

Ordering Information:

Example: Select the complete part number from the table below -i.e. PM75B5LA060 (Package A) is a 600V, 75 Ampere PV-IPM.

Type	Current Rating Amperes	V _{CEs} Volts (x 10)
PM	75	60





Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PM75B5LA060 / PM75B5LB060

Photo Voltaic IPM

H-Bridge + 1 Chopper

75 Amperes/600 Volts

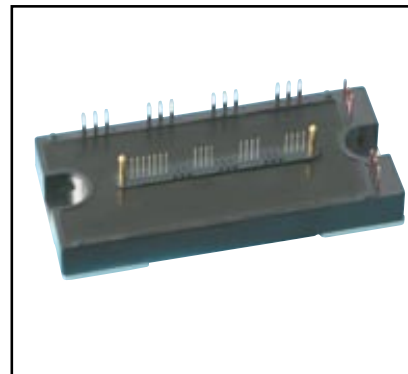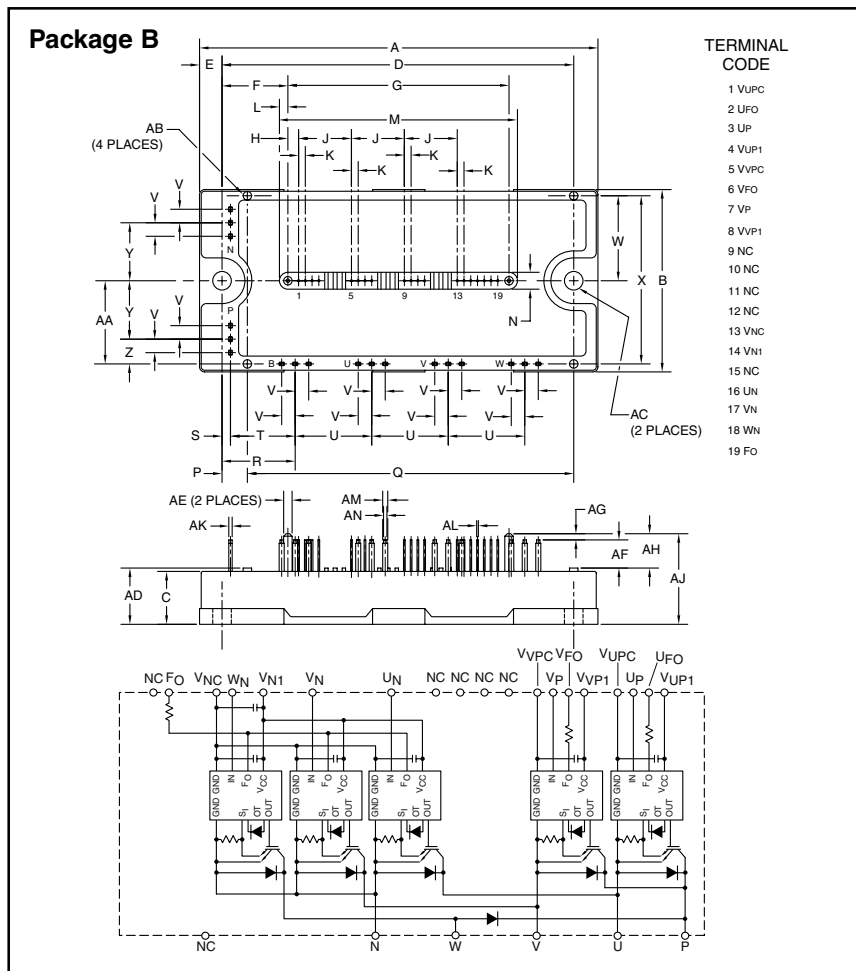

Description:

Powerex Intellimod™ 5th generation PV-IPMs are isolated base modules designed for power switching applications operating at frequencies to 30kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free-wheel diode power devices.

Features:

- ☐ Complete Output Power Circuit
- ☐ Gate Drive Circuit
- ☐ Protection Logic
 - Short Circuit
 - Over Temperature
 - Using On-chip Temperature Sensing
 - Under Voltage
- ☐ Low Loss Using 5th Generation IGBT Chip

Applications:

- ☐ PV Inverters
- ☐ PV UPS
- ☐ PV Power Supplies

Ordering Information:

Example: Select the complete part number from the table below -i.e. PM75B5LB060 (Package B) is a 600V, 75 Ampere PV-IPM.

Type	Current Rating Amperes	V _{CES} Volts (x 10)
PM	75	60

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	4.72	120.0
B	2.17	55.0
C	0.63	16.0
D	4.17	106.0
E	0.28	7.0
F	0.78	19.75
G	2.62	66.5
H	0.13	3.25
J	0.63	16.0
K	0.08	2.0
L	0.10	2.5
M	2.81	71.5
N	0.20	5.0
P	0.31	7.75
Q	3.87	98.25
R	0.87	22.0
S	0.10	2.5
T	0.77	19.5
U	0.91	23.0

Dimensions	Inches	Millimeters
V	0.16	4.0
W	1.01	25.75
X	2.00	50.75
Y	0.69	17.5
Z	0.30	7.5
AA	0.98	25.0
AB	0.10 Dia.	Dia. 2.5
AC	0.22 Dia.	Dia. 5.5
AD	0.67	17.0
AE	0.10 Dia.	Dia. 2.5
AF	0.33	8.5
AG	0.08	2.0
AH	0.41	10.5
AJ	1.08	27.5
AK	0.04	1.0
AL	0.02 Sq.	Sq. 0.5
AM	0.06	1.5
AN	0.04	1.0



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PM75B5LA060 / PM75B5LB060

Photo Voltaic IPM

H-Bridge + 1 Chopper

75 Amperes/600 Volts

Absolute Maximum Ratings, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	PM75B5LA060 / PM75B5LB060	Units
Power Device Junction Temperature	T_j	-20 to 150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to 125	$^\circ\text{C}$
Module Case Operating Temperature (Note 1)	T_C	-20 to 100	$^\circ\text{C}$
Mounting Torque, M5 Mounting Screws	—	31	in-lb
Mounting Torque, M5 Main Terminal Screws (Package A only)	—	31	in-lb
Package A Module Weight (Typical)	—	380	Grams
Package B Module Weight (Typical)	—	340	Grams
Supply Voltage, Surge (Applied between P-N)	$V_{\text{CC(surge)}}$	550	Volts
Operation of Short Circuit Protections (Applied between P-N, $V_D = 13.5 \sim 16.5\text{V}$, Inverter Part, $T_j = 125^\circ\text{C}$ Start)	$V_{\text{CC(prot.)}}$	400	Volts
Isolation Voltage, AC 1 minute, 60Hz Sinusoidal	V_{ISO}	2500	Volts

IGBT Inverter Part

Collector-Emitter Voltage ($V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$)	V_{CES}	600	Volts
Collector Current ($T_C = 25^\circ\text{C}$)	$\pm I_C$	75	Amperes
Peak Collector Current ($T_C = 25^\circ\text{C}$)	$\pm I_{\text{CP}}$	150	Amperes
Collector Dissipation ($T_C = 25^\circ\text{C}$) (Note 1)	P_C	390	Watts

Converter Part

Collector-Emitter Voltage ($V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$)	V_{CES}	600	Volts
Collector Current ($T_C = 25^\circ\text{C}$)	$\pm I_C$	75	Amperes
Peak Collector Current ($T_C = 25^\circ\text{C}$)	$\pm I_{\text{CP}}$	150	Amperes
Collector Dissipation ($T_C = 25^\circ\text{C}$) (Note 1)	P_C	390	Watts
Diode Rated DC Reverse Voltage ($T_C = 25^\circ\text{C}$)	$V_{\text{R(DC)}}$	600	Volts
Diode Forward Current	I_F	75	Amperes

Control Part

Supply Voltage (Applied between $V_{\text{UP1}}-V_{\text{UPC}}$, $V_{\text{VP1}}-V_{\text{VPC}}$, $V_{\text{N1}}-V_{\text{NC}}$)	V_D	20	Volts
Input Voltage (Applied between U_P-V_{UPC} , V_P-V_{VPC} , U_N-V_{NC} , $W_N-\text{Br}-V_{\text{NC}}$)	V_{CIN}	20	Volts
Fault Output Supply Voltage (Applied between $U_{\text{FO}}-V_{\text{UPC}}$, $V_{\text{FO}}-V_{\text{VPC}}$, F_O-V_{NC})	V_{FO}	20	Volts
Fault Output Supply Current (Sink Current at U_{FO} , V_{FO} , F_O Terminals)	I_{FO}	20	mA



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PM75B5LA060 / PM75B5LB060

Photo Voltaic IPM

H-Bridge + 1 Chopper

75 Amperes/600 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified


Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
IGBT Inverter Part						
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 75\text{A},$ Pulsed, $T_j = 25^\circ\text{C}$	—	1.5	—	Volts
		$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 75\text{A},$ Pulsed, $T_j = 125^\circ\text{C}$	—	1.55	—	Volts
Diode Forward Voltage	V_{EC}	$-I_C = 75\text{A}, V_{CIN} = 15\text{V}, V_D = 15\text{V}$	—	2.2	3.3	Volts
Inductive Load Switching Times	t_{on}		0.3	0.7	1.4	μs
	t_{rr}	$V_D = 15\text{V}, V_{CIN} = 0 \leftrightarrow 15\text{V}$	—	0.1	0.2	μs
	$t_{C(on)}$	$V_{CC} = 300\text{V}, T_j = 125^\circ\text{C}$	—	0.2	0.4	μs
	t_{off}	Inductive Load (Per 1 Arm)	—	0.9	1.8	μs
	$t_{C(off)}$		—	0.2	0.4	μs
Collector-Emitter Cutoff Current	I_{CES}	$V_{CE} = V_{CES}, V_{CIN} = 15\text{V}, T_j = 25^\circ\text{C}$	—	—	1.0	mA
		$V_{CE} = V_{CES}, V_{CIN} = 15\text{V}, T_j = 125^\circ\text{C}$	—	—	10	mA

Converter Part


Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 75\text{A},$ Pulsed, $T_j = 25^\circ\text{C}$	—	1.5	—	Volts
		$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 75\text{A},$ Pulsed, $T_j = 125^\circ\text{C}$	—	1.55	—	Volts
Diode Forward Voltage	V_{EC}	$-I_C = 75\text{A}, V_{CIN} = 15\text{V}, V_D = 15\text{V}$	—	2.2	3.3	Volts
Diode Forward Voltage	V_{FM}	$I_F = 50\text{A}$	—	1.7	2.7	Volts
Collector-Emitter Cutoff Current	I_{CES}	$V_{CE} = V_{CES}, V_{CIN} = 15\text{V}, T_j = 25^\circ\text{C}$	—	—	1.0	mA
		$V_{CE} = V_{CES}, V_{CIN} = 15\text{V}, T_j = 125^\circ\text{C}$	—	—	10	mA

Note 1: T_C (under the chip) Measurement Point

Package A

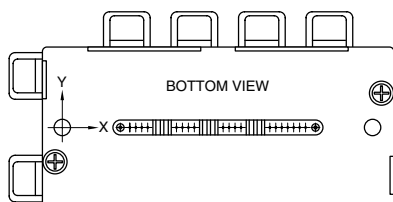

Package B

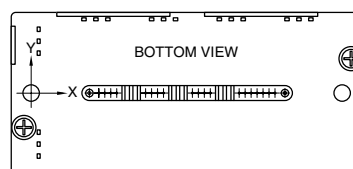



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PM75B5LA060 / PM75B5LB060

Photo Voltaic IPM

H-Bridge + 1 Chopper

75 Amperes/600 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Control Part						
Control Supply Voltage	V_D	Applied between $V_{UP1}-V_{UPC}$, $V_{VP1}-V_{VPC}$, $V_{N1}-V_N$	13.5	15.0	16.5	Volts
Circuit Current	I_D	$V_D = 15\text{V}$, $V_{CIN} = 15\text{V}$, $V_{N1}-V_{NC}$	—	20	30	mA
		$V_D = 15\text{V}$, $V_{CIN} = 15\text{V}$, $V_{XP1}-V_{XPC}$	—	5	10	mA
Input ON Threshold Voltage	$V_{th(on)}$	Applied between U_P-V_{UPC} ,	1.2	1.5	1.8	Volts
Input OFF Threshold Voltage	$V_{th(off)}$	V_P-V_{VPC} , U_N-V_N , W_N-Br-V_{NC}	1.7	2.0	2.3	Volts
Short Circuit Trip Level	SC	Inverter Part	150	—	—	Amperes
($-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, $V_D = 15\text{V}$, Inductive Load per 1 Arm)		Brake Part	150	—	—	Amperes
Short Circuit Current Delay Time	$t_{off(SC)}$	$V_D = 15\text{V}$	—	10	—	μs
Over Temperature Protection*	OT	Trip Level	135	145	—	$^\circ\text{C}$
($V_D = 15\text{V}$)	OT_r	Reset Level	—	125	—	$^\circ\text{C}$
Supply Circuit Under-voltage Protection	UV	Trip Level	11.5	12.0	12.5	Volts
($T_j \leq 125^\circ\text{C}$)	UV_r	Reset Level	12.0	12.5	13.0	Volts
Fault Output Current*	$I_{FO(H)}$	$V_D = 15\text{V}$, $V_{FO} = 15\text{V}$	—	—	0.01	mA
	$I_{FO(L)}$	$V_D = 15\text{V}$, $V_{FO} = 15\text{V}$	—	10	15	mA
Fault Output Pulse Width*	t_{FO}	$V_D = 15\text{V}$	1.0	1.8	—	ms

*Fault output is given only when the internal SC, OT and UV protections schemes of either upper or lower device operate to protect it.
Fault output of SC protection given pulse. Fault output of OT, UV protection given pulse while over trip level.

Thermal Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Units
Junction to Case Thermal Resistance	$R_{th(j-c)Q}$	Inverter IGBT (Per 1 Element) (Note 1)	—	—	0.32	$^\circ\text{C/Watt}$
	$R_{th(j-c)D}$	Inverter FWDi (Per 1 Element) (Note 1)	—	—	0.53	$^\circ\text{C/Watt}$
	$R_{th(j-c)Q}$	Converter IGBT (Per 1 Element) (Note 1)	—	—	0.32	$^\circ\text{C/Watt}$
	$R_{th(j-c)D}$	Converter FWDi Upper Arm (Per 1 Element) (Note 1)	—	—	0.33	$^\circ\text{C/Watt}$
	$R_{th(j-c)D}$	Converter FWDi Lower Arm (Per 1 Element) (Note 1)	—	—	0.53	$^\circ\text{C/Watt}$
Contact Thermal Resistance	$R_{th(c-f)}$	Case to Fin (Per 1 Element), Thermal Grease Applied	—	—	0.038	$^\circ\text{C/Watt}$

Recommended Conditions for Use

Characteristic	Symbol	Condition	Value	Units
Supply Voltage	V_{CC}	Applied across P-N Terminals	≤ 400	Volts
Control Supply Voltage	V_D	Applied between $V_{UP1}-V_{UPC}$, $V_{VP1}-V_{VPC}$, $V_{N1}-V_{NC}$	15.0 ± 1.5	Volts
Input ON Voltage	$V_{CIN(on)}$	Applied between U_P-V_{UPC} ,	≤ 0.8	Volts
Input OFF Voltage	$V_{CIN(off)}$	V_P-V_{VPC} , U_N-V_N , W_N-Br-V_{NC}	≥ 9.0	Volts
PWM Input Frequency	f_{PWM}	Using Application Circuit	≤ 30	kHz
Arm Shoot-through Blocking Time	t_{DEAD}	Using Application Circuit of IPM's Input Signal of Each Arm	≥ 2.0	μs



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272


PM75B5LA060 / PM75B5LB060

Photo Voltaic IPM


H-Bridge + 1 Chopper

75 Amperes/600 Volts


**OUTPUT CHARACTERISTICS
(TYPICAL - INVERTER PART)**

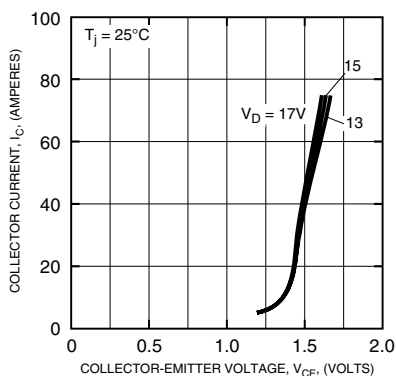


**COLLECTOR-EMITTER
SATURATION VOLTAGE CHARACTERISTICS
(TYPICAL - INVERTER PART)**

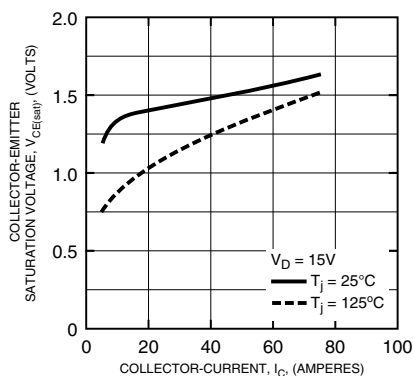


**COLLECTOR-EMITTER SATURATION VOLTAGE
VS. SUPPLY VOLTAGE CHARACTERISTICS
(TYPICAL - INVERTER PART)**

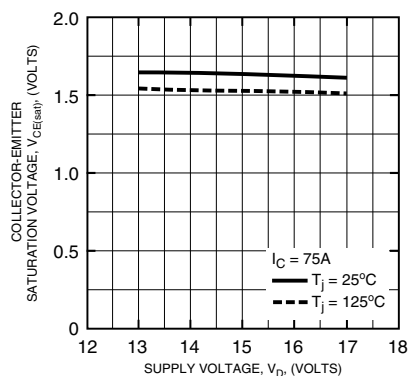


**FREE-WHEEL DIODE
FORWARD CHARACTERISTICS
(TYPICAL - INVERTER PART)**

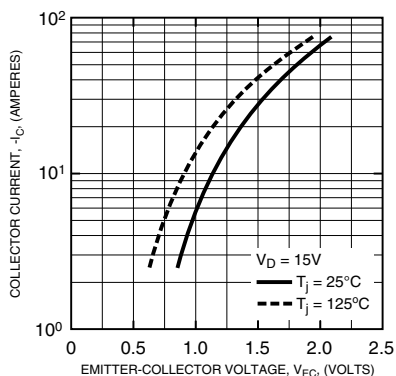


**REVERSE RECOVERY CHARACTERISTICS
(TYPICAL - INVERTER PART)**

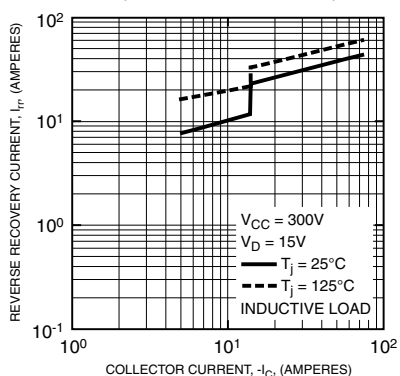


**REVERSE RECOVERY CHARACTERISTICS
(TYPICAL - INVERTER PART)**

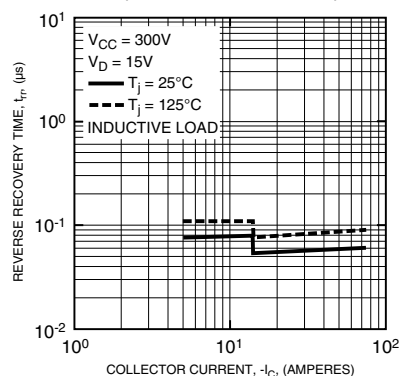


**SWITCHING LOSS (ON) VS.
COLLECTOR CURRENT
(TYPICAL - INVERTER PART)**

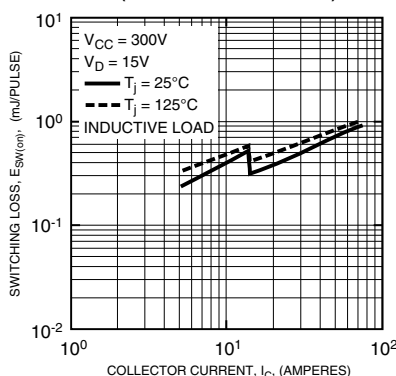

**SWITCHING LOSS (OFF) VS.
COLLECTOR CURRENT
(TYPICAL - INVERTER PART)**

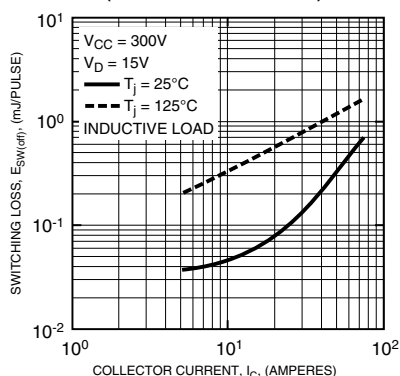

**SWITCHING TIME VS.
COLLECTOR CURRENT
(TYPICAL - INVERTER PART)**

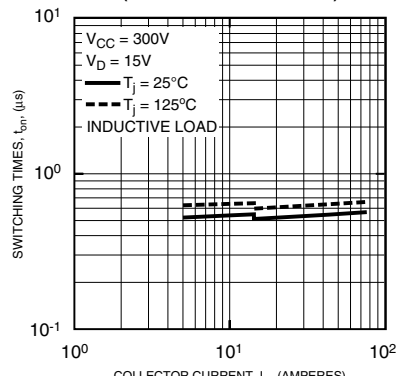




Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PM75B5LA060 / PM75B5LB060

Photo Voltaic IPM

H-Bridge + 1 Chopper

75 Amperes/600 Volts

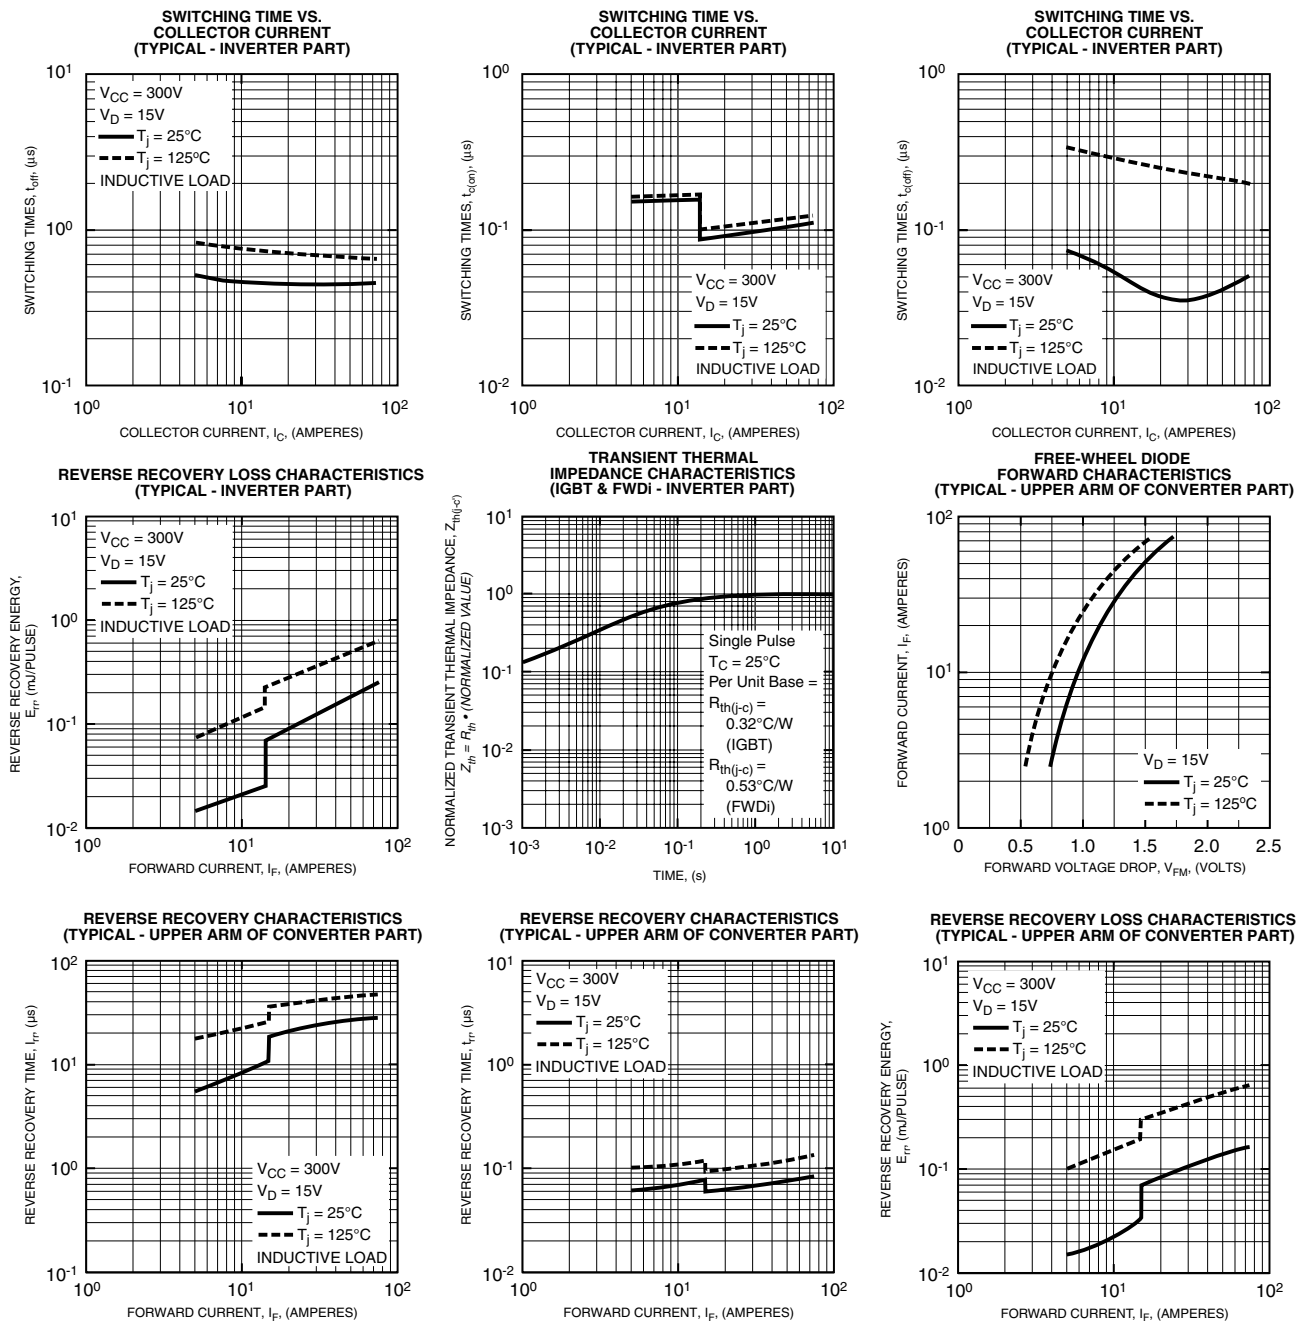



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PM75B5LA060 / PM75B5LB060

Photo Voltaic IPM

H-Bridge + 1 Chopper

75 Amperes/600 Volts

