

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Texas Instruments](#)

[PT5101A](#)

For any questions, you can email us directly:


[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

## PT5100 Series

1-A Positive Step-down  
Integrated Switching Regulator

**SLTS028B**

(Revised 11/8/2001)

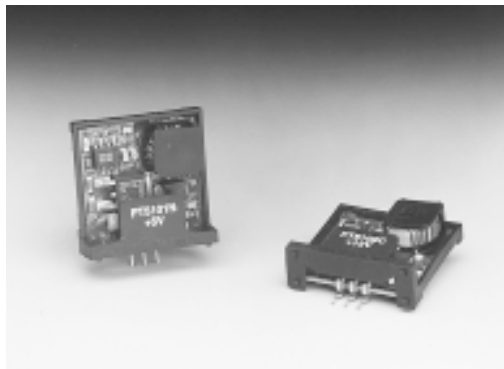

### Features

- 90%+ Efficiency
- Internal Short-Circuit Protection
- Pin-Compatible with 3-Terminal Linear Regulators
- Laser-Trimmed Output Voltage
- Over-Temperature Protection
- Small Footprint
- Wide Input Range
- 5-Pin Mount Option (Suffixes L & M)

### Description

The PT5100 modules are a series of economical, easy-to-use 1-A positive step-down, Integrated Switching Regulators (ISRs). These ISRs are compatible with most TO-220 style linear regulators, and when employed as a linear replacement, provide significant benefits in both efficiency and power dissipation. They are recommended for use in a wide variety of on-board power regulation applications. These include computer, data storage, industrial controls, and battery powered equipment. Modules are laser-trimmed for optimal output voltage accuracy, and exhibit excellent line and load regulation. The PT5100 also features output current limiting and thermal shutdown protection.


### Ordering Information

<b>PT5101</b> □	=	+5.0 Volts
<b>PT5102</b> □	=	+12.0 Volts
<b>PT5103</b> □	=	+3.3 Volts
<b>PT5105</b> □	=	+6.5 Volts
<b>PT5107</b> □	=	+15.0 Volts
<b>PT5109</b> □	=	+5.6 Volts
<b>PT5110</b> □	=	+9.0 Volts
<b>PT5111</b> □	=	+10.0 Volts
<b>PT5112</b> □	=	+8.0 Volts

### PT Series Suffix (PT1234x)

Case/Pin Configuration	Order Suffix	Package Code
Vertical	<b>N</b>	(EAD)
Horizontal	<b>A</b>	(EAA)
SMD	<b>C</b>	(EAC)
Horizontal, 2-pin Tab	<b>M</b>	(EAM)
SMD, 2-Pin Tab	<b>L</b>	(EAL)


(Reference the applicable package code drawing for the dimensions and PC board layout)



### Pin-Out Information

Pin	Function
1	V <sub>in</sub>
2	GND
3	V <sub>out</sub>

### Standard Application

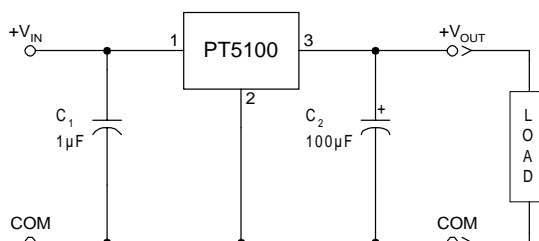

C<sub>1</sub> = Optional 1μF ceramic capacitor  
C<sub>2</sub> = Required 100μF electrolytic

## PT5100 Series

### 1-A Positive Step-down Integrated Switching Regulator

#### Specifications (Unless otherwise stated, $T_a = 25^\circ\text{C}$ , $V_{in} = V_{inmin}$ , $C_{out} = 100\mu\text{F}$ , and $I_o = I_{omax}$ )

Characteristic	Symbol	Conditions	PT5100 SERIES			Units
			Min	Typ	Max	
Output Current	$I_o$	Over $V_{in}$ range	0.1 (1)	—	1.0	A
Input Voltage Range	$V_{in}$	Over $I_o$ Range	$V_o = 3.3\text{V}$	9	26	VDC
			$V_o = 5.0\text{V}$	9	38	
			$V_o > 5.0\text{V}$	$V_o + 4$	38	
Set Point Voltage Tolerance	$V_o \text{ tol}$		—	$\pm 1$	$\pm 2$	$\%V_o$
Temperature Variation	$\text{Reg}_{temp}$	$0^\circ \leq T_a \leq +60^\circ\text{C}$ , $I_o = I_{omin}$	—	$\pm 0.5$	—	$\%V_o$
Line Regulation	$\text{Reg}_{line}$	Over $V_{in}$ range	—	$\pm 5$	$\pm 10$	mV
Load Regulation	$\text{Reg}_{load}$	Over $I_o$ range	—	$\pm 5$	$\pm 10$	mV
Total Output Voltage Variation	$\Delta V_{otot}$	Includes set-point, line, load, $0^\circ \leq T_a \leq +60^\circ\text{C}$	—	$\pm 1.5$	$\pm 3$	$\%V_o$
Efficiency	$\eta$		$V_o = 15\text{V}$	95	—	%
			$V_o = 12\text{V}$	94	—	
			$V_o = 10\text{V}$	92	—	
			$V_o = 5.0\text{V}$	90	—	
			$V_o = 3.3\text{V}$	82	—	
$V_o$ Ripple (pk-pk)	$V_r$	20MHz bandwidth	—	2	—	$\%V_o$
Transient Response	$t_{tr}$	1A/ $\mu\text{s}$ load step, 50% to 100% $I_{omax}$	—	100	200	$\mu\text{s}$
	$\Delta V_{tr}$	$V_o$ over/undershoot	—	$\pm 5.0$	—	$\%V_o$
Current Limit	$I_{lim}$	$\Delta V_o = -1\%$	1.2	2.6	—	A
Switching Frequency	$f_s$	Over $V_{in}$ range	$V_o \geq 5.0\text{V}$	500	650	kHz
			$V_o \leq 3.3\text{V}$	575	725	
External Output Capacitance	$C_{out}$		100	—	—	$\mu\text{F}$
Operating Temperature Range	$T_a$	Over $V_{in}$ range	$-40$ (2)	—	$+85$ (3)	$^\circ\text{C}$
Thermal Resistance	$\theta_{ja}$	Free-air convection (40-60LFM)	$V_o = 3.3\text{V}$	45	—	$^\circ\text{C/W}$
			$V_o = 5.0\text{V}$	50	—	
			$V_o \geq 12\text{V}$	60	—	
Storage Temperature	$T_s$	—	$-40$	—	$+125$	$^\circ\text{C}$
Reliability	MTBF	Per Bellcore TR-332 50% stress, $T_a = 40^\circ\text{C}$ , ground benign	11.3	—	—	10 <sup>6</sup> Hrs
Mechanical Shock	—	Per Mil-Std-883D, method 2002.3, 1mS, half-sine, mounted to a fixture	—	500	—	G's
Mechanical Vibration	—	Per Mil-Std-883D, Method 2007.2 20-2000Hz, soldered in PC board	—	5 (4)	—	G's
Weight	—	Suffixes N, A, & C	—	4.5	—	grams
		Suffixes L & M	—	6.5	—	
Flammability	—	Materials meet UL 94V-0	—	—	—	—

**Notes:** (1) The ISR will operate at no load with reduced specifications.

(2) For operation below  $0^\circ\text{C}$ , use a tantalum type capacitor for  $C_2$ .

(3) See Thermal Derating curves.

(4) The tab pins on the S-pin mount package types (suffixes L & M) must be soldered. For more information see the applicable package outline drawing.


## PT5100 Series

### 1-A Positive Step-down Integrated Switching Regulator


## Typical Characteristics

#### PT5103, 3.3 VDC (See Note A)


##### Efficiency vs Output Current




##### Ripple vs Output Current

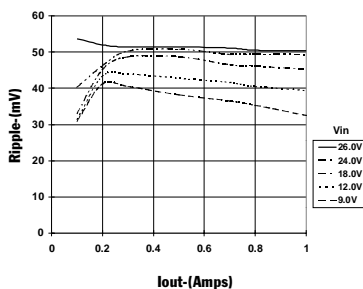

##### Thermal Derating ( $T_A$ ) (See Note B)

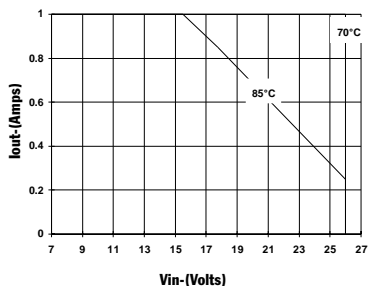


##### Power Dissipation vs Output Current

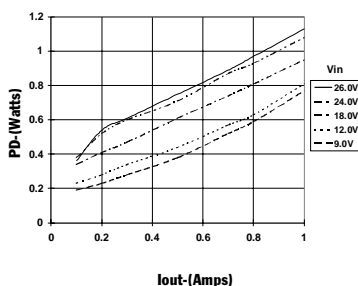


#### PT5101, 5.0 VDC (See Note A)


##### Efficiency vs Output Current

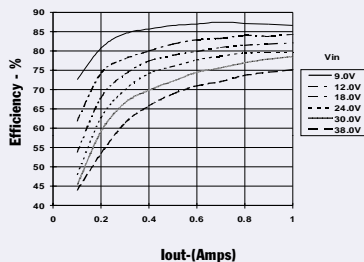


##### Ripple vs Output Current

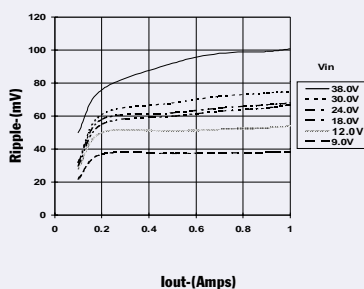

##### Thermal Derating ( $T_A$ ) (See Note B)

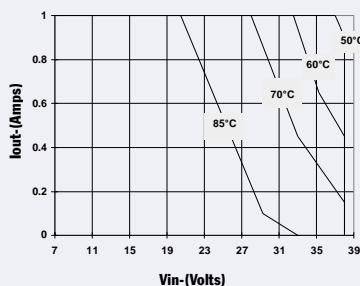


##### Power Dissipation vs Output Current

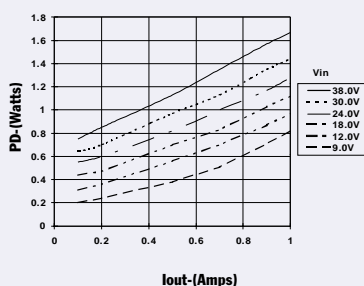


#### PT5102, 12.0 VDC (See Note A)


##### Efficiency vs Output Current

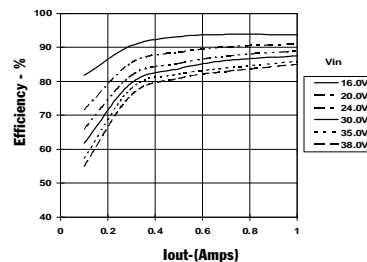


##### Ripple vs Output Current

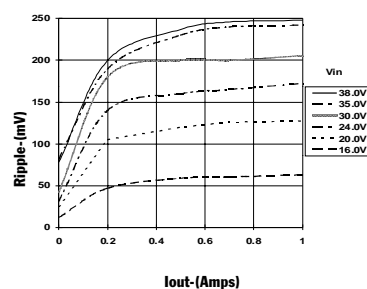

##### Thermal Derating ( $T_A$ ) (See Note B)

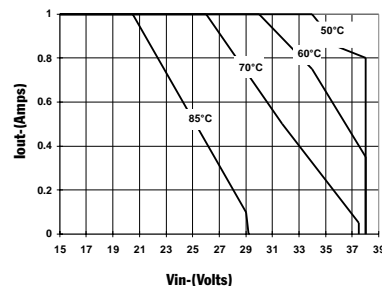

##### Power Dissipation vs Output Current

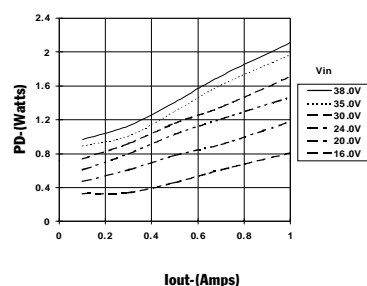

**Note A:** Characteristic data has been developed from actual products tested at 25°C. This data is considered typical data for the Converter.

**Note B:** Thermal derating graphs are developed in free-air convection cooling, which corresponds to approximately 40–60LFM of airflow.

### IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

#### Mailing Address:

Texas Instruments  
Post Office Box 655303  
Dallas, Texas 75265