Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Panduit F6S2-2M1Y

For any questions, you can email us directly: sales@integrated-circuit.com




Distributor of Panduit: Excellent Integrated System Limited

Datasheet of F6S2-2M1Y - CABLE ASSEMB FIBER OPTIC SIMPLEX



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

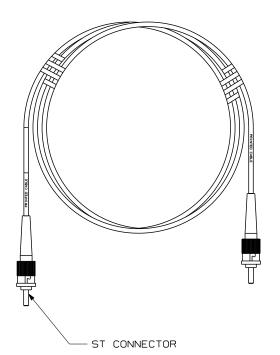

- NOTES:

 1. SEE SHEET 2 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.

 2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE OUANTITY.

 3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.

 4. TESTED TO EIA/TIA 568-B.3.

 5. PATCH CORD ROUTING CONFIGURATION A TO B.

 6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF ROHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE ROHS TECHNICAL ADAPTATION COMMITTEE.

										SIMPLEX FIBER OPTIC PATCH CORD ST TO ST CONFIGURATION CUSTOMER DRAWING				
											TINLEY PARK, ILL			
										THIRD ANGLE PROJECTION	ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.XX (.XXX):.010 (0.3) (.XXX):.03 (0.8) ANGLES	MO2779CF_DC_00	M.prt	
										DRAWN BY MC	REVIEW DRAWING NUMBERS	SEE TABLE, SH	HT. 2	
R	06-04-07	мС		RELEASED TO PRODUCTION	02779-36	5				05-23-07		02779-36	SIZE	
REV	DATE	BY	СНК	DESCRIPTION	ECN -	R	CUST	SUP	отн	CHK 'D		(SHT. 1 of 2)	. А	



Distributor of Panduit: Excellent Integrated System LimitedDatasheet of F6S2-2M1Y - CABLE ASSEMB FIBER OPTIC SIMPLEX

4

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

SIMPLEX FIBER OPTIC ST TO ST PATCH CORD									
PANDU I T		CABLE	ST CONNECTOR						
PART NO.	RATING	FIBER TYPE	COUNT	COLOR	MAX. IL	RL	COLOR		
F5S2-2M*Y		50/125um OM2		ORANGE	0.30dB	20dB	METALLIC FINISH		
F6S2-2M*Y	RISER (OFNR)	62.5/125um OMI	SIMPLEX 3.0mm	ORANGE	0.30dB	20dB	METALLIC FINISH		
F9S2-2M*Y		9/125um 0S1		YELLOW	0.75dB	55dB	METALLIC FINISH		

* - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

										SIMPLEX FIBER OPTIC PATCH CORD ST TO ST CONFIGURATION CUSTOMER DRAWING				
										THIRD ANGLE PROJECTION	UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.XX):.010 [0.3] (.XX):.03 [0.8] ANGLES	DRAWING FILENAME MO2779CF_DC_OOA.p SCALE NONE	prt	
										DRAWN BY MC		PART NO. SEE TABLE	E I ZE	
REV	06-04-07 DATE	MC BY	СНК	RELEASED TO PRODUCTION DESCRIPTION	02779-36 ECN -	R	CUST	SUP	отн	05-23-07		02779-36 (SHT. 2 of 2)	4	