

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Embedded Artists](#)

[EA-QSB-003](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



[About Us](#)

[Products](#)

[Services](#)

[Support](#)


[Projects](#)

[Web Shop](#)

**Products**

- > Board Comparison Chart
- » Developer's Kits
- » OEM Boards
- ↓ **QuickStart Boards**
- > LPC1343
- > LPC2106 RS232
- > **LPC2129 CAN**
- > LPC2148 USB
- > Prototype board
- > Christmas Tree
- > Color LCD Bluetooth Game
- » Education Boards
- » LPCXpresso & mbed
- » Displays
- » Tools
- » Accessories

## LPC2129 CAN QuickStart Board

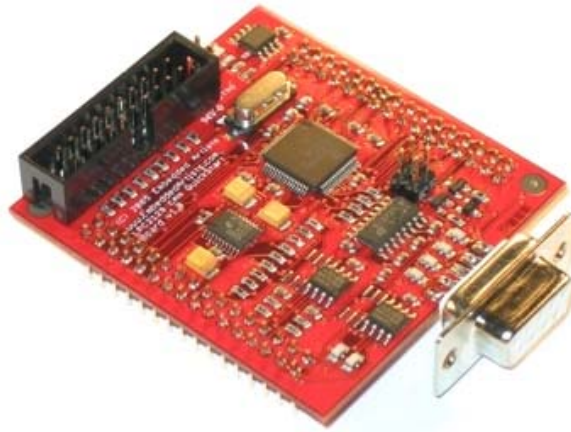

<b>Price Information</b>  <b>EUR</b>  Art.no: <b>EA-QSB-003</b> <a href="#">Buy</a>
---

<b>Price Information</b>  <b>EUR</b>  <i>With a prototype board</i>  Art.no: <b>EA-QSB-103</b> <a href="#">Buy</a>
--

- Overview
- Specification**
- MCU
- Related Products
- Resources
- FAQ

### LPC2129 CAN QuickStart Board

<i>Processor</i>	<u>NXP's ARM7TDMI LPC2129 microcontroller</u>
<i>Program Flash</i>	256 KB
<i>Data Memory</i>	16 KB
<i>CAN</i>	Dual CAN channels with TJA1040 or TJA1041 transceivers
<i>Clock Crystals</i>	<ul style="list-style-type: none"> <li>• 12.0000 MHz crystal for maximum execution speed and standard CAN bit rates (5 x PLL = 60 Mhz CPU clock)</li> </ul>
<i>Dimensions</i>	55 x 58 mm
<i>Power</i>	On-board low-dropout voltage and reset generation <ul style="list-style-type: none"> <li>• Generates +3.3V and +1.8V from a +5V supply</li> <li>• +3.3V available for external circuits, up to 300 mA</li> <li>• Power supply: 5 VDC</li> </ul>
<i>Connectors</i>	<ul style="list-style-type: none"> <li>• Dual 2x16 pins I/O connectors</li> <li>• All LPC2129 I/O pins are available on connectors</li> <li>• RS232, DSUB-9 (ESD/EMI protected)</li> </ul>
<i>Other</i>	<ul style="list-style-type: none"> <li>• 256 Kbit I2C E2PROM</li> <li>• Simple and automatic program download (ISP) via serial channel. Circuit that automatically controls the bootloader from RS232 channel</li> <li>• Four layer PCB (FR-4 material) for best noise immunity</li> <li>• Easy to connect to JTAG signals</li> </ul>