

## **Excellent Integrated System Limited**

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Anaren](#)  
[BD2425N5050AHF](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

# Xinger®

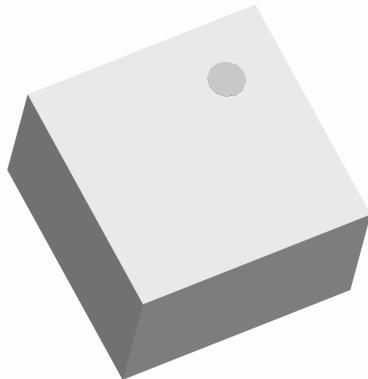

## Ultra Low Profile 0404 Balun 50Ω to 50Ω Balanced

### Description

The BD2425N5050AHF is a low profile, low impedance sub-miniature unbalanced to balanced transformer designed for differential inputs and output locations on modern chipsets targeted at 802.11 b+g, MIMO b+g, Bluetooth, Zigbee, ULPR and ISM band Applications in an easy to use surface mount package. The BD2425N5050AHF is ideal for high volume manufacturing and delivers higher performance than traditional ceramic baluns. The BD2425N5050AHF has an unbalanced port impedance of 50Ω and a 50Ω balanced port impedance. The output ports have equal amplitude (-3dB) with 180 degree phase differential. The BD2425N5050AHF is available on tape and reel for pick and place high volume manufacturing.

### Detailed Electrical Specifications:

Specifications subject to change without notice.

#### Features:


- 2400 – 2500 MHz
- 0.56 mm Height Profile
- 50 Ohm to 2 x 25 Ohm
- Low Insertion Loss
- Targeted At 802.11 b+g, MIMO b+g, Bluetooth, Zigbee, ULPR and ISM Band Applications
- Surface Mountable
- Tape & Reel
- Non-conductive Top Surface
- RoHS Compliant
- Halogen free

Parameter	ROOM (25°C)			Unit
	Min.	Typ.	Max	
Frequency	2400		2500	MHz
Unbalanced Port Impedance		50		Ω
Balanced Port Impedance		50		Ω
Return Loss	15	23		dB
Insertion Loss*		0.7	0.9	dB
Amplitude Balance		0.3	0.8	dB
Phase Balance		3	7	Degrees
CMRR		30		dB
Power Handling			0.75	Watts
Operating Temperature	-55		+85	°C


\* Insertion Loss stated at room temperature (Insertion Loss is approximately 0.1 dB higher at +85 °C)

### Outline Drawing


Top View (Near-side)

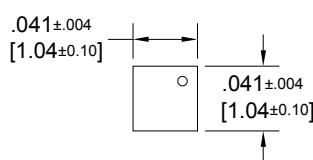

Side View



Bottom View (Far-side)

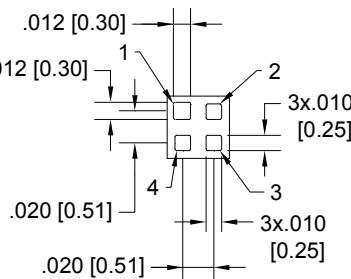

Pin	Designation
1	GND / DC Feed + RF GND
2	Unbalanced Port
3	Balanced Port
4	Balanced Port

Dimensions are in Inches [Millimeters]  
Mechanical Outline

Tolerances are Non-Cumulative




## Model BD2425N5050AHF

Rev B

**Anaren®**

### Typical Performance: 2300 MHz. to 2600 MHz.

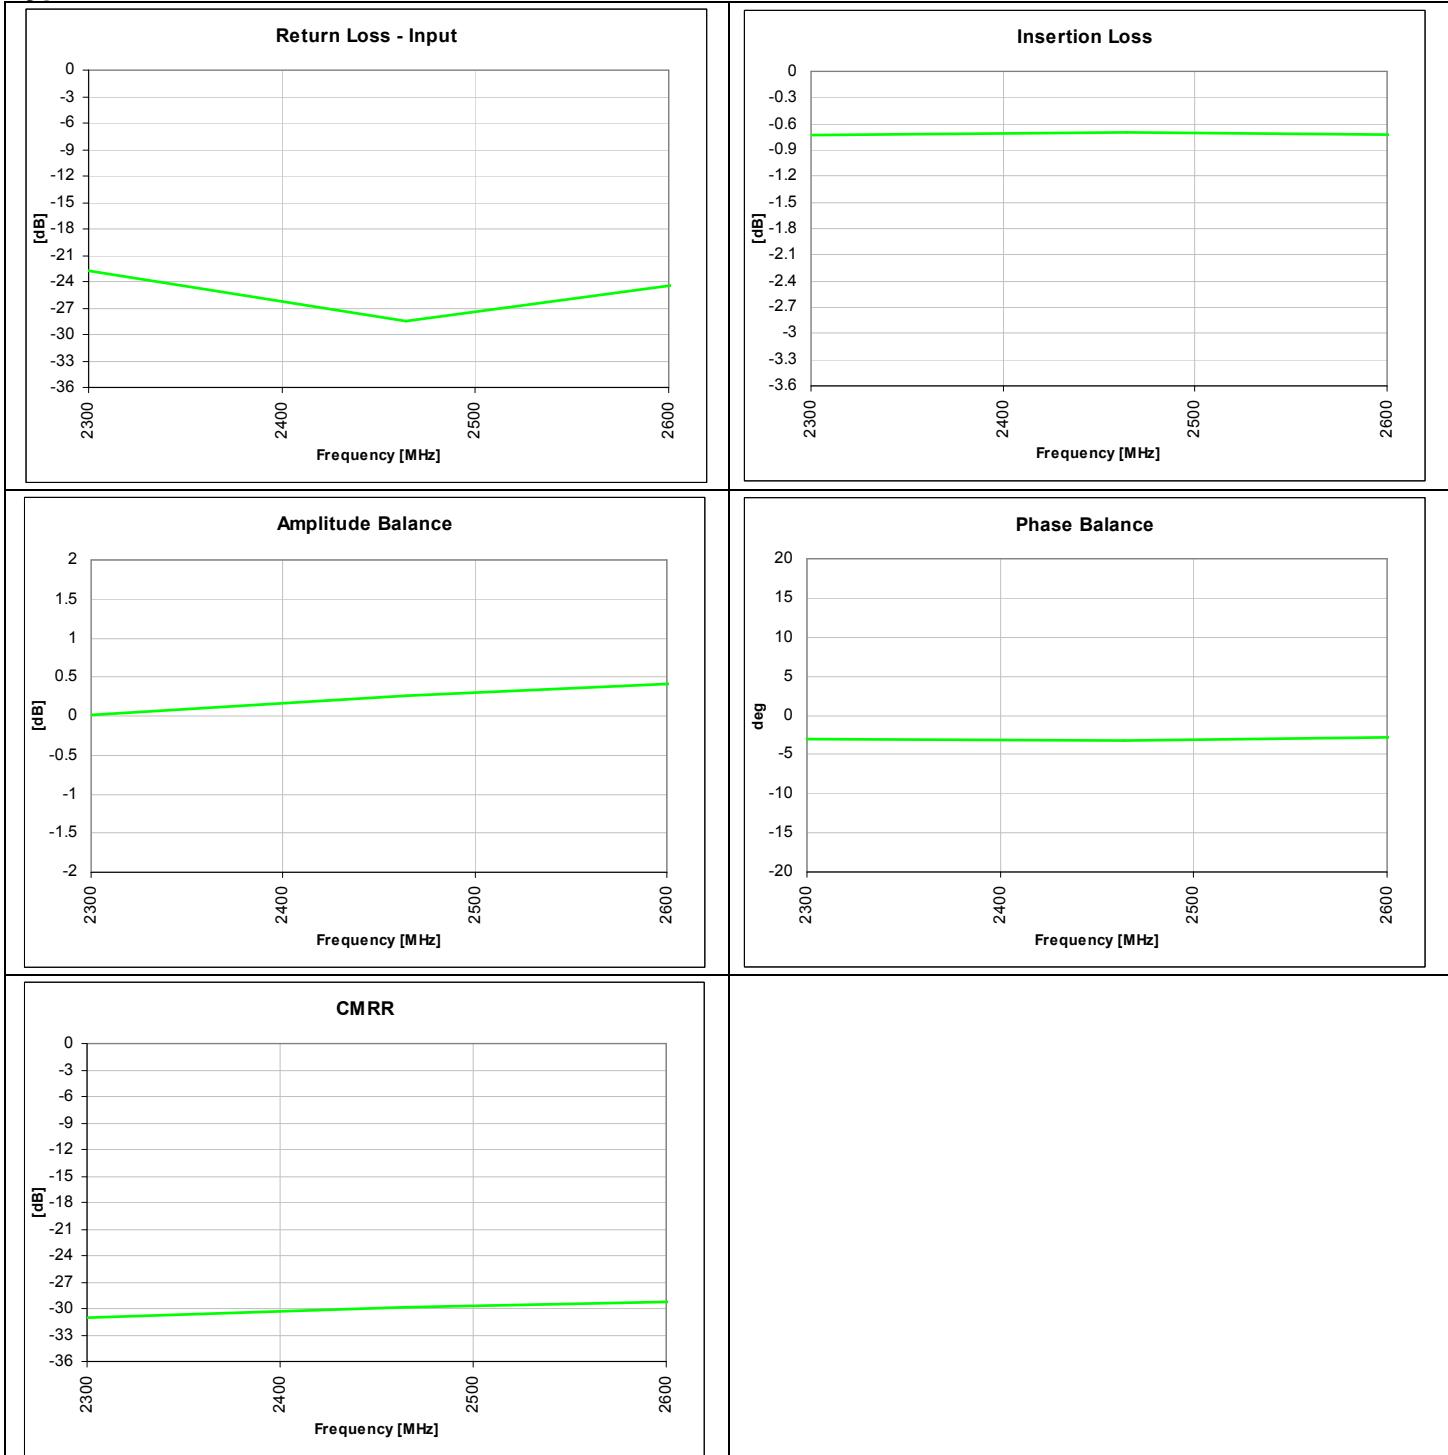






USA/Canada: (315) 432-8909  
Toll Free: (800) 411-6596  
Europe: +44 2392-232392

Available on Tape and  
Reel for Pick and Place  
Manufacturing.



**Anaren**  
What'll we think of next?™

**Wide Band Performance: 500 MHz. to 8500 MHz.**

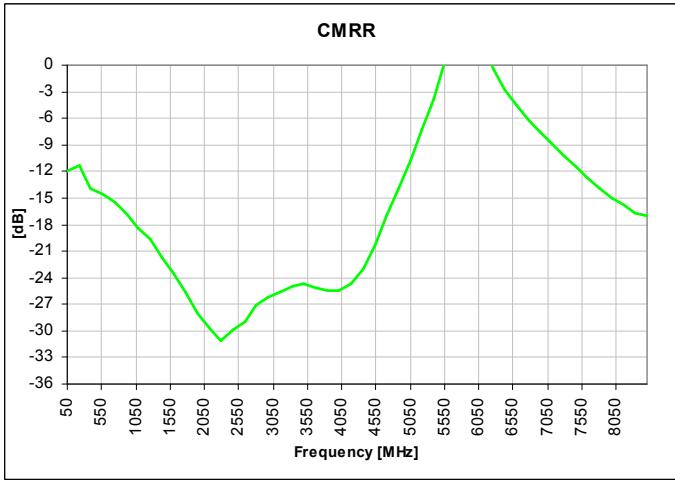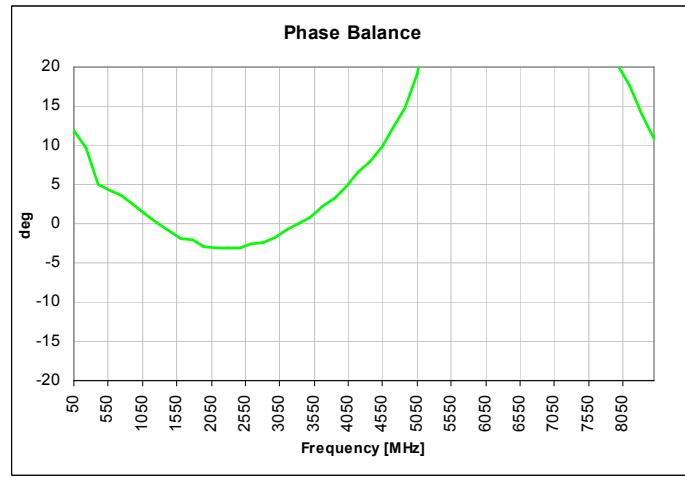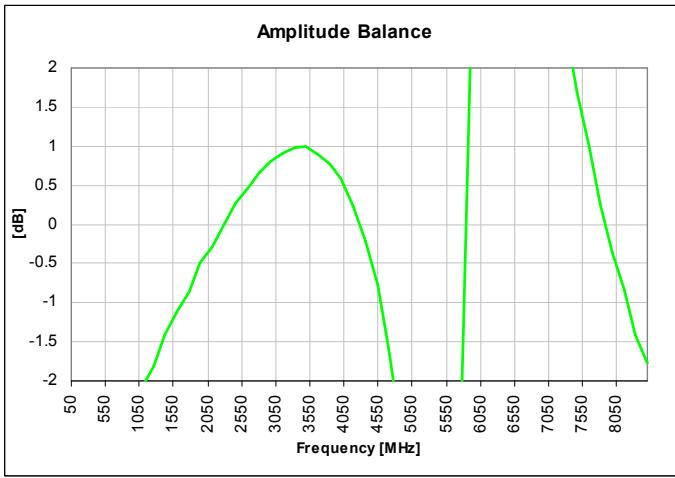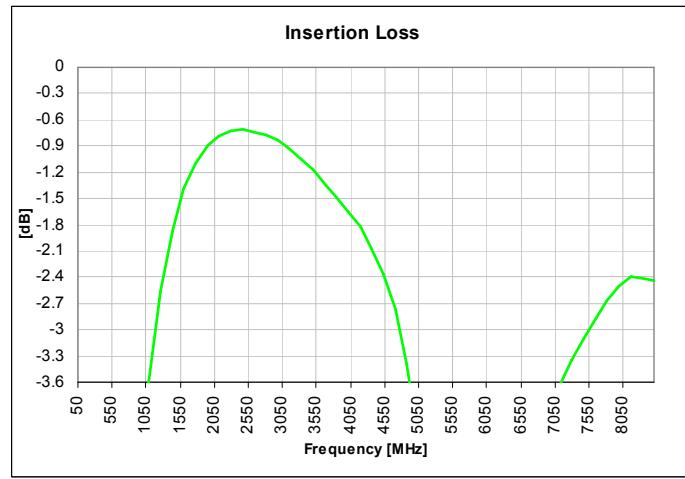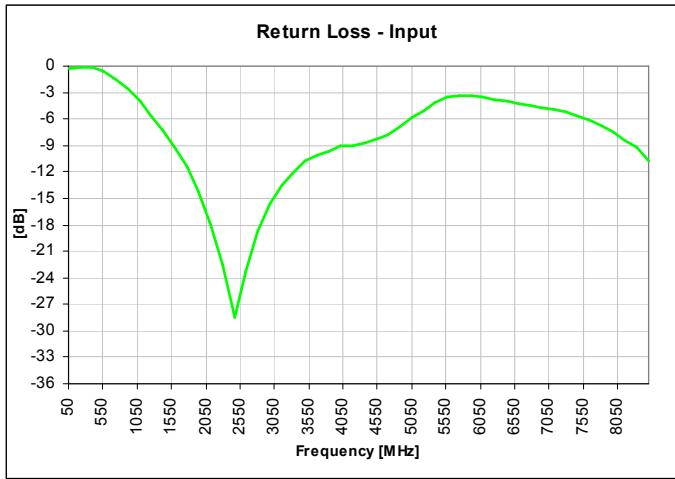

## Model BD2425N5050AHF

Rev B

**Anaren®**

### Mounting Configuration:

In order for Xinger surface mount components to work optimally, the proper impedance transmission lines must be used to connect to the RF ports. If this condition is not satisfied, insertion loss, Isolation and VSWR may not meet published specifications.

All of the Xinger components are constructed from ceramic filled PTFE composites which possess excellent electrical and mechanical stability having X and Y thermal coefficient of expansion (CTE) of 17 ppm/ $^{\circ}$ C.

An example of the PCB footprint used in the testing of these parts is shown below. An example of a DC-biased footprint is also shown below. In specific designs, the transmission line widths need to be adjusted to the unique dielectric coefficients and thicknesses as well as varying pick and place equipment tolerances.

With No DC Bias	With DC Bias
<p>Dimensions are in Inches [Millimeters] Mounting Footprint</p>	<p>Plated thru hole to ground Dimensions are in Inches [Millimeters] Mounting Footprint</p>



### Packaging and Ordering Information

Parts are available in reel and are packaged per EIA 481-2. Parts are oriented in tape and reel as shown below. Minimum order quantities are 4000 per reel. See Model Numbers below for further ordering information.

