

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Bel Fuse Inc.](#)
[QM48T40018-NDB0](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

QM48T40 DC-DC Converter Data Sheet

36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output

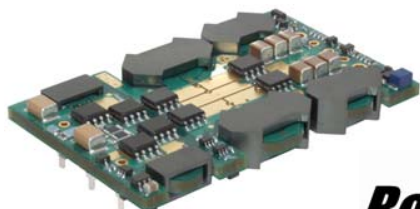

Applications

- Telecommunications
- Data communications
- Wireless communications
- Servers, workstations

Benefits

- High efficiency – no heat sink required
- Higher current capability at 70 °C than most competitors' 40 A half-bricks

Description

The QmaX™ Series of high current single output DC-DC converters set new standards for thermal performance and power density in the quarter-brick package.

The 40 A QM48 converters of the QmaX™ Series provide outstanding thermal performance in high temperature environments that is comparable to or exceeds the industry's leading 40 A half-bricks. This performance is accomplished through the use of patented/patent-pending circuit, packaging, and processing techniques to achieve ultra-high efficiency, excellent thermal management, and a very low-body profile.

The low-body profile and the preclusion of heat sinks minimize impedance to system airflow, thus enhancing cooling for both upstream and downstream devices. The use of 100% automation for assembly, coupled with advanced electronic circuits and thermal design, results in a product with extremely high reliability.

Operating from a 36-75 V input, the QmaX™ Series converters provide any standard output voltage from 3.3 V down to 1.0 V. Outputs can be trimmed from –20% to +10% of the nominal output voltage (±10% for output voltages 1.2 V and 1.0 V), thus providing outstanding design flexibility.

Features

- RoHS lead-free solder and lead-solder-exempted products are available
- Delivers up to 40 A (132 W)
- Industry-standard quarter-brick pinout
- On-board input differential LC-filter
- Outputs available: 3.3, 2.5, 2.0, 1.8, 1.5, 1.2 & 1.0 V
- Start-up into pre-biased load
- No minimum load required
- Low profile: 0.31" [7.9 mm]
- Low weight: 1.06 oz [30 g]
- Meets Basic Insulation requirements of EN60950
- Withstands 100 V input transient for 100 ms
- Fixed-frequency operation
- Remote output sense
- Fully protected with automatic recovery
- Positive or negative logic ON/OFF option
- Output voltage trim range: +10%/–20% with industry-standard trim equations (except 1.2 V and 1.0 V outputs with trim range ±10%)
- High reliability: MTBF = 2.6 million hours, calculated per Telcordia TR-332, Method I Case 1
- UL60950 recognized in US and Canada and DEMKO certified per IEC/EN60950
- Designed to meet Class B conducted emissions per FCC and EN55022 when used with external filter
- All materials meet UL94, V-0 flammability rating

QM48T40 DC-DC Converter Data Sheet

36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



Electrical Specifications (common to all versions)

Conditions: $T_A = 25^\circ\text{C}$, Airflow = 300 LFM (1.5 m/s), $V_{in} = 48\text{ VDC}$, All output voltages, unless otherwise specified.

Parameter	Notes	Min	Typ	Max	Units
Absolute Maximum ratings					
Input Voltage	Continuous	0		80	VDC
Operating Ambient Temperature		-40		85	$^\circ\text{C}$
Storage Temperature		-55		125	$^\circ\text{C}$
Input Characteristics					
Operating Input Voltage Range		36	48	75	VDC
Input Under Voltage Lockout	Non-latching				
Turn-on Threshold		33	34	35	VDC
Turn-off Threshold		31	32	33	VDC
Input Voltage Transient	100 ms			100	VDC
Isolation Characteristics					
I/O Isolation		2000			VDC
Isolation Capacitance			1.4		nF
Isolation Resistance		10			M Ω
Feature Characteristics					
Switching Frequency			415		kHz
Output Voltage Trim Range ¹	Industry-std. equations (3.3 - 1.5 V)	-20		+10	%
	Use trim equation on Page 4 (1.2 - 1.0 V)	-10		+10	%
Remote Sense Compensation ¹	Percent of $V_{OUT(NOM)}$			+10	%
Output Overvoltage Protection	Non-latching	117	128	140	%
Overtemperature Shutdown (PCB)	Non-latching		125		$^\circ\text{C}$
Auto-Restart Period	Applies to all protection features		100		ms
Turn-On Time			4		ms
ON/OFF Control (Positive Logic)					
Converter Off (logic low)		-20		0.8	VDC
Converter On (logic high)		2.4		20	VDC
ON/OFF Control (Negative Logic)					
Converter Off (logic high)		2.4		20	VDC
Converter On (logic low)		-20		0.8	VDC

Additional Notes:

- V_{out} can be increased up to 10% via the sense leads or up to 10% via the trim function. However, total output voltage trim from all sources should not exceed 10% of $V_{OUT(NOM)}$, in order to ensure specified operation of overvoltage protection circuitry.

QM48T40 DC-DC Converter Data Sheet

36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



Operation

Input and Output Impedance

These power converters have been designed to be stable with no external capacitors when used in low inductance input and output circuits.

In many applications, the inductance associated with the distribution from the power source to the input of the converter can affect the stability of the converter. The addition of a 33 μF electrolytic capacitor with an ESR $< 1 \Omega$ across the input helps to ensure stability of the converter. In many applications, the user has to use decoupling capacitance at the load. The power converter will exhibit stable operation with external load capacitance up to 40,000 μF on 3.3 – 1.0 V outputs.

ON/OFF (Pin 2)

The ON/OFF pin is used to turn the power converter on or off remotely via a system signal. There are two remote control options available, positive logic and negative logic with both referenced to $V_{in(-)}$. Typical connections are shown in Fig. A.

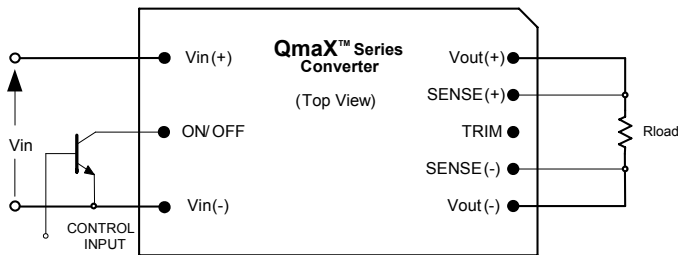


Fig. A: Circuit configuration for ON/OFF function.

The positive logic version turns on when the ON/OFF pin is at a logic high and turns off when at a logic low. The converter is on when the ON/OFF pin is left open. See the Electrical Specifications for logic high/low definitions.

The negative logic version turns on when the pin is at a logic low and turns off when the pin is at a logic high. The ON/OFF pin can be hard wired directly to $V_{in(-)}$ to enable automatic power up of the converter without the need of an external control signal.

ON/OFF pin is internally pulled up to 5 V through a resistor. A properly debounced mechanical switch, open-collector transistor, or FET can be used to drive the input of the ON/OFF pin. The device must be capable of sinking up to 0.2 mA at a low level voltage of $\leq 0.8 \text{ V}$. An external voltage source ($\pm 20 \text{ V}$ maximum) may be connected directly to the ON/OFF input, in which case it must be capable of sourcing

or sinking up to 1 mA depending on the signal polarity. See the Startup Information section for system timing waveforms associated with use of the ON/OFF pin.

Remote Sense (Pins 5 and 7)

The remote sense feature of the converter compensates for voltage drops occurring between the output pins of the converter and the load. The SENSE(-) (Pin 5) and SENSE(+) (Pin 7) pins should be connected at the load or at the point where regulation is required (see Fig. B).

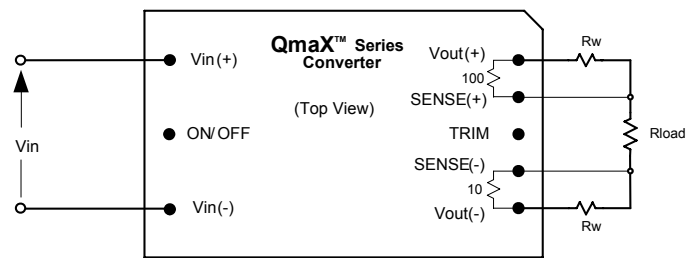


Fig. B: Remote sense circuit configuration.

CAUTION

If remote sensing is not utilized, the SENSE(-) pin must be connected to the $V_{out(-)}$ pin (Pin 4), and the SENSE(+) pin must be connected to the $V_{out(+)}$ pin (Pin 8) to ensure the converter will regulate at the specified output voltage. If these connections are not made, the converter will deliver an output voltage that is slightly higher than the specified data sheet value.

Because the sense leads carry minimal current, large traces on the end-user board are not required. However, sense traces should be located close to a ground plane to minimize system noise and ensure optimum performance.

The converter's output overvoltage protection (OVP) senses the voltage across $V_{out(+)}$ and $V_{out(-)}$, and not across the sense lines, so the resistance (and resulting voltage drop) between the output pins of the converter and the load should be minimized to prevent unwanted triggering of the OVP.

When utilizing the remote sense feature, care must be taken not to exceed the maximum allowable output power capability of the converter, equal to the product of the nominal output voltage and the allowable output current for the given conditions.

When using remote sense, the output voltage at the converter can be increased by as much as 10% above the nominal rating in order to maintain the required voltage across the load. Therefore, the designer must, if necessary, decrease the maximum current (originally obtained from the derating curves) by the same percentage to ensure the converter's actual output power remains at or below the maximum allowable output power.

QM48T40 DC-DC Converter Data Sheet

36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



Output Voltage Adjust /TRIM (Pin 6)

The output voltage can be adjusted up 10% or down 20% for $V_{out} \geq 1.5$ V, and $\pm 10\%$ for $V_{out} = 1.2$ V and 1.0 V relative to the rated output voltage by the addition of an externally connected resistor. For 3.3 V output voltage, trim up to 10% is guaranteed only at $V_{in} \geq 40$ V, and it is marginal (8% to 10%) at $V_{in} = 36$ V.

The TRIM pin should be left open if trimming is not being used. To minimize noise pickup, a 0.1 μ F capacitor is connected internally between the TRIM and SENSE(-) pins.

To increase the output voltage, refer to Fig. C. A trim resistor, R_{T-INCR} , should be connected between the TRIM (Pin 6) and SENSE(+) (Pin 7), with a value of:

$$R_{T-INCR} = \frac{5.11(100 + \Delta)V_{O-NOM} - 626}{1.225\Delta} - 10.22 \text{ [k}\Omega\text{]} (3.3-1.5 \text{ V})$$

$$R_{T-INCR} = \frac{84.6}{\Delta} - 7.2 \text{ [k}\Omega\text{]} (1.2\text{V})$$

$$R_{T-INCR} = \frac{120}{\Delta} - 9 \text{ [k}\Omega\text{]} (1.0 \text{ V})$$

where,

R_{T-INCR} = Required value of trim-up resistor [k Ω]

V_{O-NOM} = Nominal value of output voltage [V]

$$\Delta = \frac{(V_{O-REQ} - V_{O-NOM})}{V_{O-NOM}} \times 100 \text{ [%]}$$

V_{O-REQ} = Desired (trimmed) output voltage [V].

When trimming up, care must be taken not to exceed the converter's maximum allowable output power. See previous section for a complete discussion of this requirement.

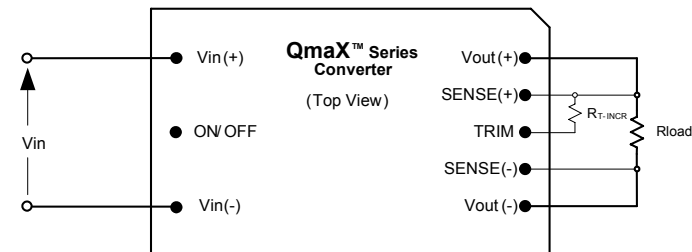


Fig. C: Configuration for increasing output voltage.

To decrease the output voltage (Fig. D), a trim resistor, R_{T-DECR} , should be connected between the TRIM (Pin 6) and SENSE(-) (Pin 5), with a value of:

$$R_{T-DECR} = \frac{511}{|\Delta|} - 10.22 \text{ [k}\Omega\text{]} \text{ (For 3.3 - 1.5 V)}$$

$$R_{T-DECR} = \frac{700}{|\Delta|} - 15 \text{ [k}\Omega\text{]} (1.2 \text{ V})$$

$$R_{T-DECR} = \frac{700}{|\Delta|} - 17 \text{ [k}\Omega\text{]} (1.0 \text{ V})$$

where,

R_{T-DECR} = Required value of trim-down resistor [k Ω]
 and Δ is as defined above.

Note: The above equations for calculation of trim resistor values match those typically used in conventional industry-standard quarter-bricks (except for 1.2 V and 1.0 V outputs).

Converters with output voltages 1.2 V and 1.0 V are available with alternative trim feature to provide the customers with the flexibility of second sourcing.

For 1.2 V and 1.0 V only, "T" version converter with a character "T" in the part number uses the following trim equations:

$$R_{T-INCR} = \frac{485}{\Delta} \text{ [k}\Omega\text{]} (1.2 \text{ V})$$

$$R_{T-INCR} = \frac{323}{\Delta} - 2 \text{ [k}\Omega\text{]} (1.0 \text{ V})$$

$$R_{T-DECR} = \frac{511}{|\Delta|} - 10.22 \text{ [k}\Omega\text{]} \text{ (For 1.2 V and 1.0 V)}$$

For 1.2 V only, "U" version converter with a character "U" in the part number uses the following trim equations:

$$R_{T-INCR} = \frac{100}{\Delta} \text{ [k}\Omega\text{]}$$

$$R_{T-DECR} = \frac{100}{|\Delta|} - 2 \text{ [k}\Omega\text{]}$$

QM48T40 DC-DC Converter Data Sheet

36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output

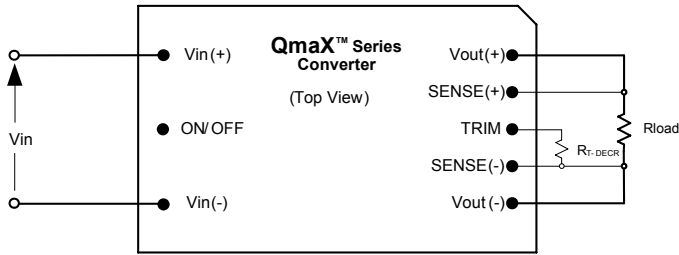


Fig. D: Configuration for decreasing output voltage.

Trimming/sensing beyond 110% of the rated output voltage is not an acceptable design practice, as this condition could cause unwanted triggering of the output overvoltage protection (OVP) circuit. The designer should ensure that the difference between the voltages across the converter's output pins and its sense pins does not exceed 10% of $V_{OUT(NOM)}$, or:

$$[V_{OUT(+)} - V_{OUT(-)}] - [V_{SENSE(+)} - V_{SENSE(-)}] \leq V_o - NOM \times 10\% [V]$$

This equation is applicable for any condition of output sensing and/or output trim.

Protection Features

Input Undervoltage Lockout

Input undervoltage lockout is standard with this converter. The converter will shut down when the input voltage drops below a pre-determined voltage.

The input voltage must be at least 35 V for the converter to turn on. Once the converter has been turned on, it will shut off when the input voltage drops below 31 V. This feature is beneficial in preventing deep discharging of batteries used in telecom applications.

Output Overcurrent Protection (OCP)

The converter is protected against overcurrent or short circuit conditions. Upon sensing an overcurrent condition, the converter will switch to constant current operation and thereby begin to reduce output voltage. When the output voltage drops below 60% of the nominal value of output voltage, the converter will shut down.

Once the converter has shut down, it will attempt to restart nominally every 100 ms with a typical 1-2% duty cycle. The attempted restart will continue indefinitely until the overload or short circuit conditions are removed or the output voltage rises above 60% of its nominal value.

Output Overvoltage Protection (OVP)

The converter will shut down if the output voltage across $V_{out}(+)$ (Pin 8) and $V_{out}(-)$ (Pin 4) exceeds the threshold of the OVP circuitry. The OVP circuitry contains its own reference, independent of the output voltage regulation loop. Once the converter has shut down, it will attempt to restart every 100 ms until the OVP condition is removed.

Overtemperature Protection (OTP)

The converter will shut down under an overtemperature condition to protect itself from overheating caused by operation outside the thermal derating curves, or operation in abnormal conditions such as system fan failure. After the converter has cooled to a safe operating temperature, it will automatically restart.

Safety Requirements

The converters meet North American and International safety regulatory requirements per UL60950 and EN60950. Basic Insulation is provided between input and output.

To comply with safety agencies' requirements, an input line fuse must be used external to the converter. The Table below provides the recommended fuse rating for use with this family of products.

Output Voltage	Fuse Rating
3.3 V	7.5 A
2.5 - 1.8 V	5 A
1.5 - 1.0 V	3 A

Modules are UL approved for maximum fuse rating of 15 Amps. To protect a group of modules with a single fuse, the rating can be increased from the recommended values above.

Electromagnetic Compatibility (EMC)

EMC requirements must be met at the end-product system level, as no specific standards dedicated to EMC characteristics of board mounted component dc-dc converters exist. However, Power-One tests its converters to several system level standards, primary of which is the more stringent EN55022, *Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement*.

QM48T40 DC-DC Converter Data Sheet

36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



An effective internal LC differential filter significantly reduces input reflected ripple current, and improves EMC.

With the addition of a simple external filter, all versions of the **QmaX™ Series** of converters pass the requirements of Class B conducted emissions per EN55022 and FCC, and meet at a minimum, Class A radiated emissions per EN55022 and Class B per FCC Title 47CFR, Part 15-J. Please contact Power-One Applications Engineering for details of this testing.

Characterization

General Information

The converter has been characterized for many operational aspects, to include thermal derating (maximum load current as a function of ambient temperature and airflow) for vertical and horizontal mounting, efficiency, startup and shutdown parameters, output ripple and noise, transient response to load step-change, overload, and short circuit.

The figures are numbered as Fig. x.y, where x indicates the different output voltages, and y associates with specific plots (y = 1 for the vertical thermal derating, ...). For example, Fig. x.1 will refer to the vertical thermal derating for all the output voltages in general.

The following pages contain specific plots or waveforms associated with the converter. Additional comments for specific data are provided below.

Test Conditions

All data presented were taken with the converter soldered to a test board, specifically a 0.060" thick printed wiring board (PWB) with four layers. The top and bottom layers were not metalized. The two inner layers, comprised of two-ounce copper, were used to provide traces for connectivity to the converter.

The lack of metalization on the outer layers as well as the limited thermal connection ensured that heat transfer from the converter to the PWB was minimized. This provides a worst-case but consistent scenario for thermal derating purposes.

All measurements requiring airflow were made in the vertical and horizontal wind tunnel using Infrared (IR) thermography and thermocouples for thermometry.

Ensuring components on the converter do not exceed their ratings is important to maintaining high reliability. If one anticipates operating the converter at or close to the maximum loads specified in the derating curves, it is prudent to check actual operating temperatures in the application.

Thermographic imaging is preferable; if this capability is not available, then thermocouples may be used. The use of AWG #40 gauge thermocouples is recommended to ensure measurement accuracy. Careful routing of the thermocouple leads will further minimize measurement error. Refer to Figure H for optimum measuring thermocouple location.

Thermal Derating

Load current vs. ambient temperature and airflow rates are given in Figs. x.1 and x.2 for vertical and horizontal converter mounting. Ambient temperature was varied between 25 °C and 85 °C, with airflow rates from 30 to 500 LFM (0.15 to 2.5 m/s).

For each set of conditions, the maximum load current was defined as the lowest of:

- (i) The output current at which any FET junction temperature does not exceed a maximum specified temperature (120 °C) as indicated by the thermographic image, or
- (ii) The nominal rating of the converter (40 A on 3.3 – 1.0 V).

During normal operation, derating curves with maximum FET temperature less or equal to 120 °C should not be exceeded. Temperature on the PCB at the thermocouple location shown in Fig. H should not exceed 118 °C in order to operate inside the derating curves.

Efficiency

Fig. x.3 shows the efficiency vs. load current plot for ambient temperature of 25 °C, airflow rate of 300 LFM (1.5 m/s) with vertical mounting and input voltages of 36 V, 48 V and 72 V. Also, a plot of efficiency vs. load current, as a function of ambient temperature with $V_{in} = 48$ V, airflow rate of 200 LFM (1 m/s) with vertical mounting is shown in Fig. x.4.

Power Dissipation

Fig. x.5 shows the power dissipation vs. load current plot for $T_a = 25$ °C, airflow rate of 300 LFM (1.5 m/s) with vertical mounting and input voltages of 36 V, 48 V and 72 V. Also, a plot of power dissipation vs. load current, as a function of ambient temperature with $V_{in} = 48$ V, airflow rate of 200 LFM (1 m/s) with vertical mounting is shown in Fig. x.6.

Startup

Output voltage waveforms, during the turn-on transient using the ON/OFF pin for full rated load currents (resistive load) are shown without and with external load capacitance in Fig. x.7 and Fig. x.8, respectively.

QM48T40 DC-DC Converter Data Sheet 36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



Ripple and Noise

Fig. x.10 shows the output voltage ripple waveform, measured at full rated load current with a 10 μ F tantalum and 1 μ F ceramic capacitor across the output. Note that all output voltage waveforms are measured across a 1 μ F ceramic capacitor.

The input reflected ripple current waveforms are obtained using the test setup shown in Fig x.11. The corresponding waveforms are shown in Fig. x.12 and Fig. x.13.

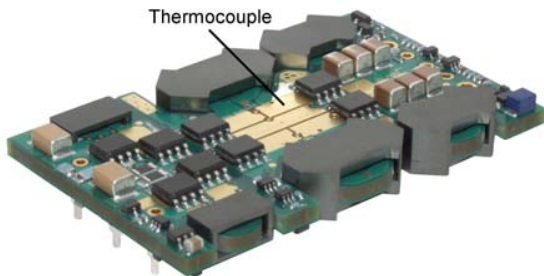


Fig. H: Location of the thermocouple for thermal testing.

QM48T40 DC-DC Converter Data Sheet

36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



Startup Information (using negative ON/OFF)

Scenario #1: Initial Startup From Bulk Supply

ON/OFF function enabled, converter started via application of V_{IN} . See Figure E.

Time	Comments
t_0	ON/OFF pin is ON; system front end power is toggled on, V_{IN} to converter begins to rise.
t_1	V_{IN} crosses Under-Voltage Lockout protection circuit threshold; converter enabled.
t_2	Converter begins to respond to turn-on command (converter turn-on delay).
t_3	Converter V_{OUT} reaches 100% of nominal value.

For this example, the total converter startup time ($t_3 - t_1$) is typically 4 ms.

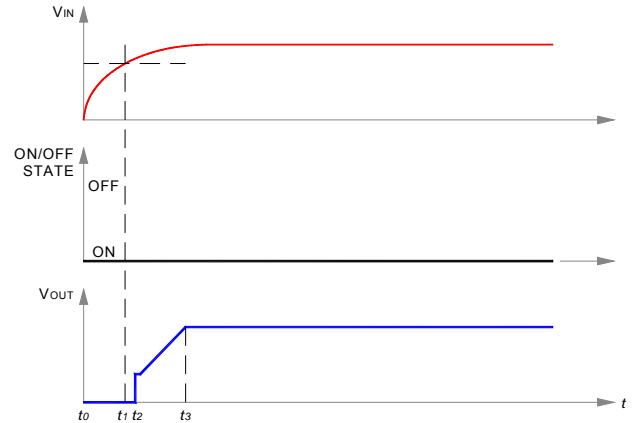


Fig. E: Startup scenario #1.

Scenario #2: Initial Startup Using ON/OFF Pin

With V_{IN} previously powered, converter started via ON/OFF pin. See Figure F.

Time	Comments
t_0	V_{INPUT} at nominal value.
t_1	Arbitrary time when ON/OFF pin is enabled (converter enabled).
t_2	End of converter turn-on delay.
t_3	Converter V_{OUT} reaches 100% of nominal value.

For this example, the total converter startup time ($t_3 - t_1$) is typically 4 ms.

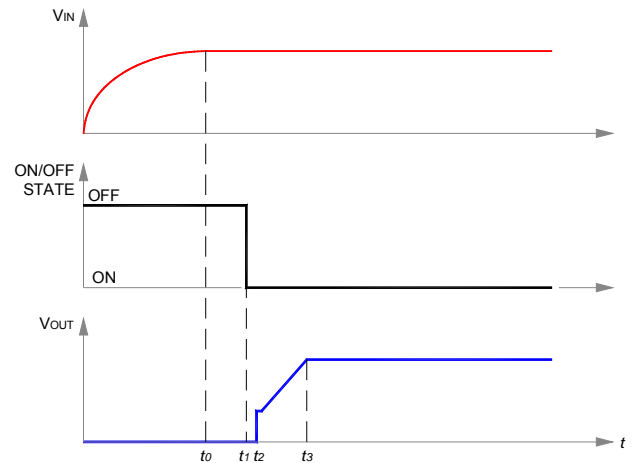


Fig. F: Startup scenario #2.

Scenario #3: Turn-off and Restart Using ON/OFF Pin

With V_{IN} previously powered, converter is disabled and then enabled via ON/OFF pin. See Figure G.

Time	Comments
t_0	V_{IN} and V_{OUT} are at nominal values; ON/OFF pin ON.
t_1	ON/OFF pin arbitrarily disabled; converter output falls to zero; turn-on inhibit delay period (100 ms typical) is initiated, and ON/OFF pin action is internally inhibited.
t_2	ON/OFF pin is externally re-enabled. If $(t_2 - t_1) \leq 100$ ms, external action of ON/OFF pin is locked out by startup inhibit timer. If $(t_2 - t_1) > 100$ ms, ON/OFF pin action is internally enabled.
t_3	Turn-on inhibit delay period ends. If ON/OFF pin is ON, converter begins turn-on; if off, converter awaits ON/OFF pin ON signal; see Figure F.
t_4	End of converter turn-on delay.
t_5	Converter V_{OUT} reaches 100% of nominal value.

For the condition, $(t_2 - t_1) \leq 100$ ms, the total converter startup time ($t_5 - t_2$) is typically 104 ms. For $(t_2 - t_1) > 100$ ms, startup will be typically 4 ms after release of ON/OFF pin.

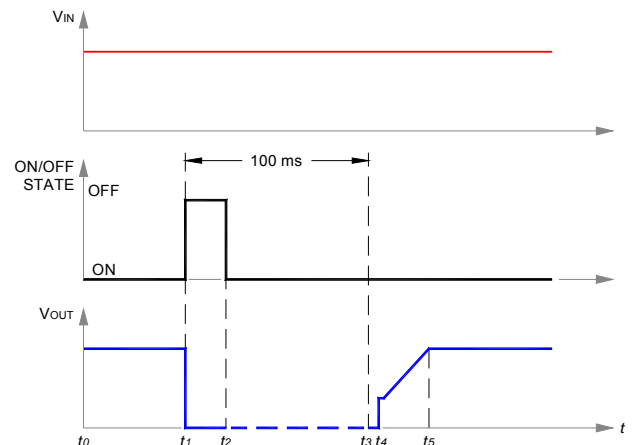


Fig. G: Startup scenario #3.

QM48T40 DC-DC Converter Data Sheet

36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



Electrical Specifications: QM48T40033 (3.3 Volts Out)

Conditions: $T_A = 25^\circ\text{C}$, Airflow = 300 LFM (1.5 m/s), $V_{in} = 48\text{ VDC}$, $V_{out} = 3.3\text{ VDC}$ unless otherwise specified.

Parameter	Notes	Min	Typ	Max	Units
Input Characteristics					
Maximum Input Current	40 ADC, 3.3 VDC Out @ 36 VDC In			4.1	ADC
Input Stand-by Current	$V_{in} = 48\text{ V}$, converter disabled		3		mADC
Input No Load Current (0 load on the output)	$V_{in} = 48\text{ V}$, converter enabled		63		mADC
Input Reflected-Ripple Current	25 MHz bandwidth		7.5		$\text{mA}_{\text{PK-PK}}$
Input Voltage Ripple Rejection	120 Hz		TBD		dB
Output Characteristics					
Output Voltage Set Point (no load)	-40 °C to 85 °C	3.267	3.300	3.333	VDC
Output Regulation					
Over Line			±2	±5	mV
Over Load			±2	±5	mV
Output Voltage Range	Over line, load and temperature	3.250		3.350	VDC
Output Ripple and Noise – 25 MHz bandwidth	Full load + 10 μF tantalum + 1 μF ceramic		30	50	$\text{mV}_{\text{PK-PK}}$
External Load Capacitance	Plus full load (resistive)			40,000	μF
Output Current Range		0		40	ADC
Current Limit Inception	Non-latching	42	47	52	ADC
Peak Short-Circuit Current	Non-latching, Short = 10 m Ω		50	60	A
RMS Short-Circuit Current	Non-latching		10	15	Arms
Dynamic Response					
Load Change 25% of Iout Max, di/dt = 1 A/ μs	$C_o = 470\text{ }\mu\text{F}$ tantalum + 1 μF ceramic		120		mV
Setting Time to 1%			80		μs
Efficiency					
100% Load			90.5		%
50% Load			92.5		%

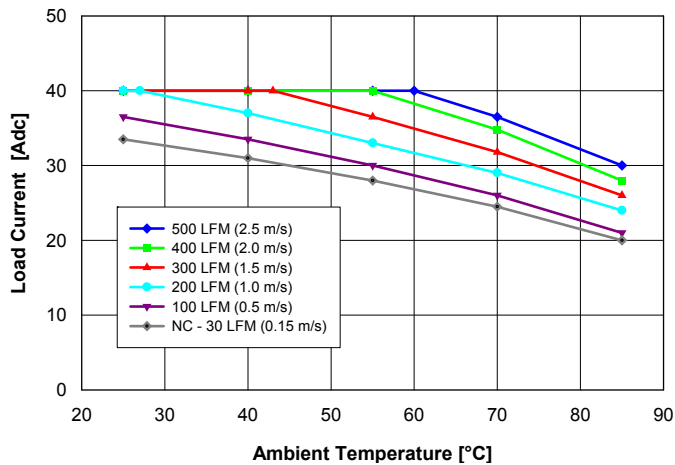


Fig. 3.3V.1: Available load current vs. ambient air temperature and airflow rates for QM48T40033 converter with B height pins mounted vertically with air flowing from pin 3 to pin 1, MOSFET temperature $\leq 120^\circ\text{C}$, $V_{in} = 48\text{ V}$.

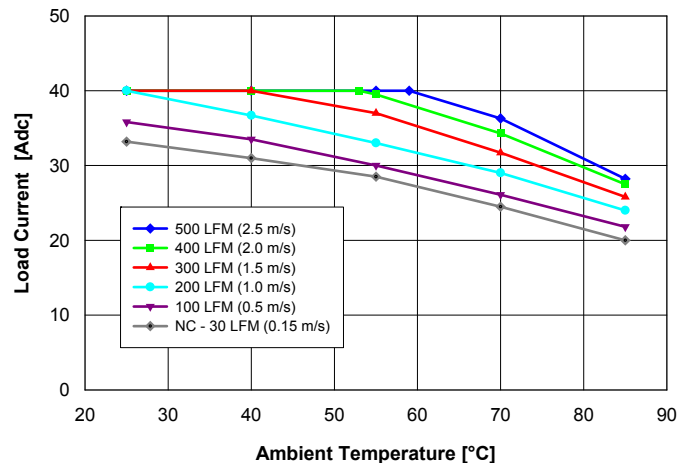


Fig. 3.3V.2: Available load current vs. ambient air temperature and airflow rates for QM48T40033 converter with B height pins mounted horizontally with air flowing from pin 3 to pin 1, MOSFET temperature $\leq 120^\circ\text{C}$, $V_{in} = 48\text{ V}$.

Note: NC – Natural convection

QM48T40 DC-DC Converter Data Sheet
36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



QM48T40033 (3.3 Volts Out)

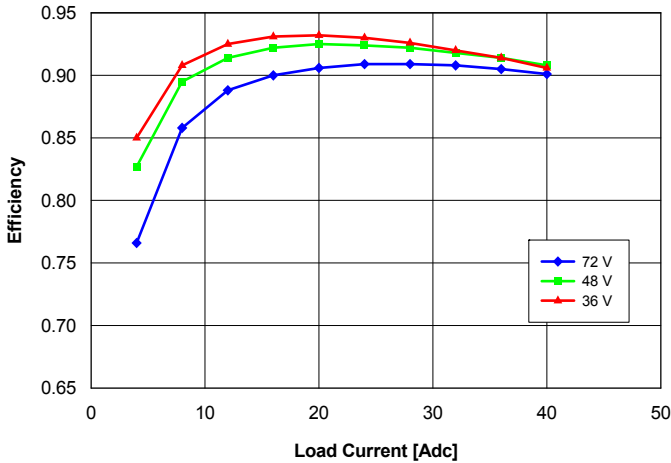


Fig. 3.3V.3: Efficiency vs. load current and input voltage for converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and Ta = 25 °C.

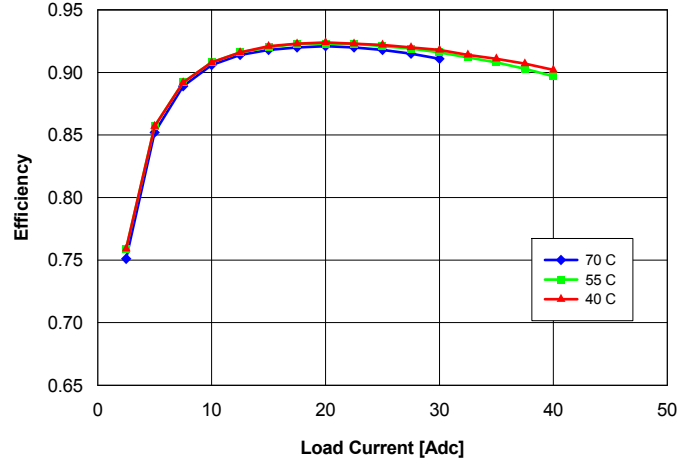


Fig. 3.3V.4: Efficiency vs. load current and ambient temperature for converter mounted vertically with Vin = 48 V and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

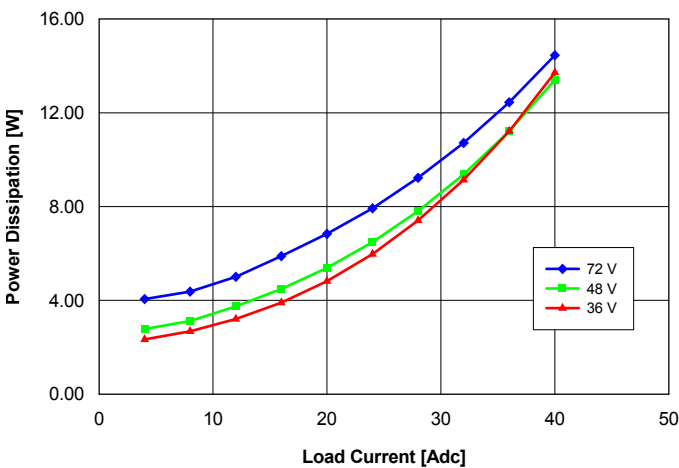


Fig. 3.3V.5: Power dissipation vs. load current and input voltage for converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and Ta = 25 °C.

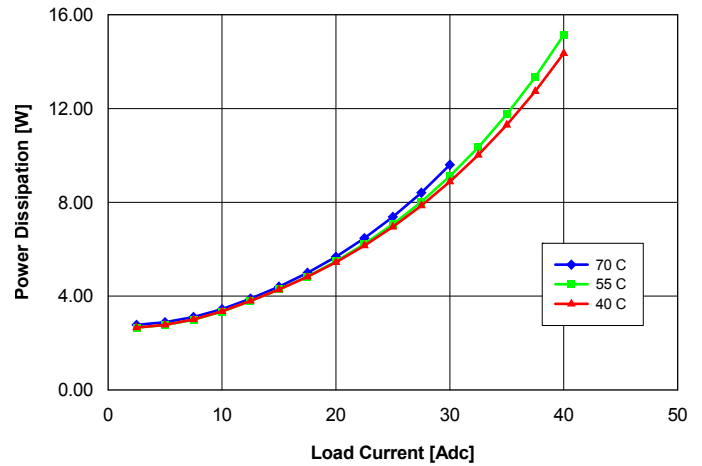


Fig. 3.3V.6: Power dissipation vs. load current and ambient temperature for converter mounted vertically with Vin = 48 V and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

QM48T40 DC-DC Converter Data Sheet
36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



QM48T40033 (3.3 Volts Out)

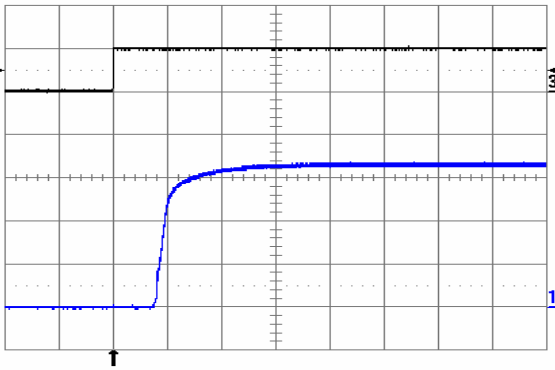


Fig. 3.3V.7: Turn-on transient at full rated load current (resistive) with no output capacitor at $V_{in} = 48\text{ V}$, triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (1 V/div.) Time scale: 2 ms/div.

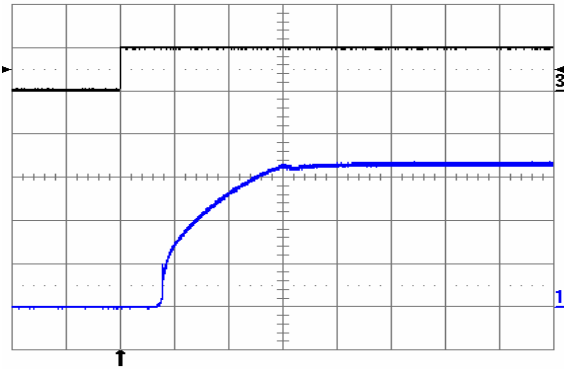


Fig. 3.3V.8: Turn-on transient at full rated load current (resistive) plus 40,000 μF at $V_{in} = 48\text{ V}$, triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (1 V/div.). Time scale: 2 ms/div.

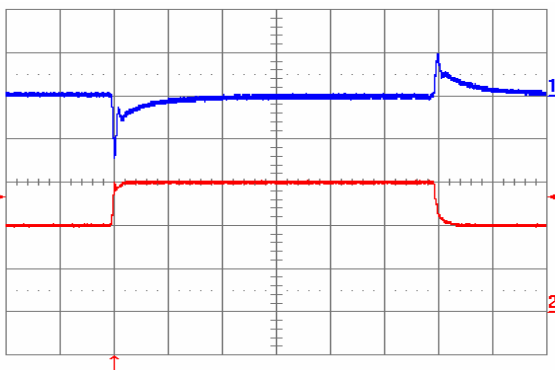


Fig. 3.3V.9: Output voltage response to load current step-change (20 A – 30 A – 20 A) at $V_{in} = 48\text{ V}$. Top trace: output voltage (100 mV/div.). Bottom trace: load current (10 A/div). Current slew rate: 1 A/ μs . $C_o = 470\text{ }\mu\text{F}$ tantalum + 1 μF ceramic. Time scale: 0.2 ms/div.

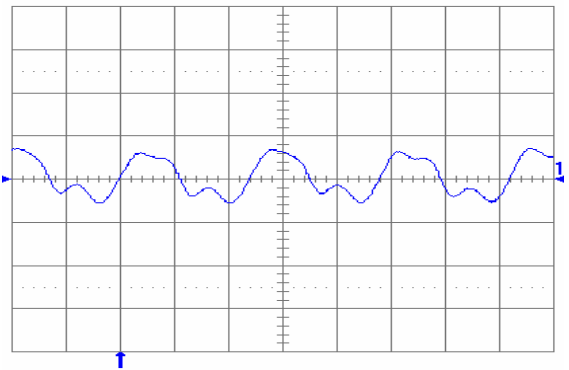


Fig. 3.3V.10: Output voltage ripple (20 mV/div.) at full rated load current into a resistive load with $C_o = 10\text{ }\mu\text{F}$ tantalum + 1 μF ceramic and $V_{in} = 48\text{ V}$. Time scale: 1 μs /div.

QM48T40 DC-DC Converter Data Sheet
36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



QM48T40033 (3.3 Volts Out)

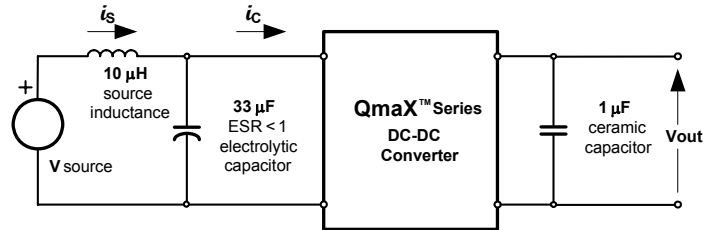


Fig. 3.3V.11: Test setup for measuring input reflected ripple currents, i_c and i_s .

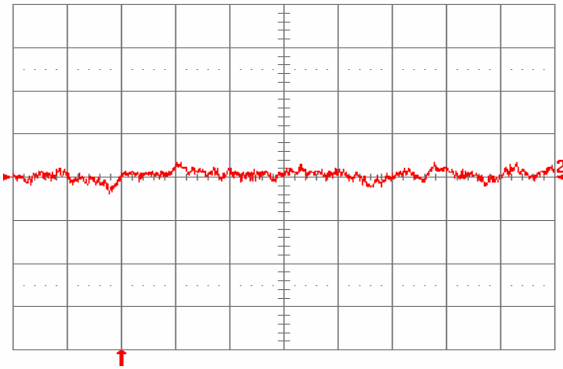


Fig. 3.3V.12: Input reflected ripple current, i_s (10 mA/div), measured through 10 μ H at the source at full rated load current and $V_{in} = 48$ V. Refer to Fig. 3.3V.11 for test setup. Time scale: 1 μ s/div.

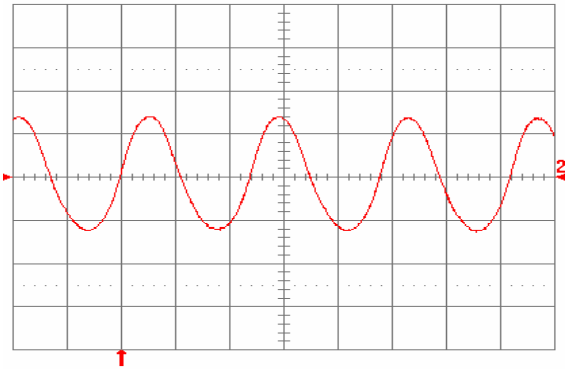


Fig. 3.3V.13: Input reflected ripple current, i_c (100 mA/div), measured at input terminals at full rated load current and $V_{in} = 48$ V. Refer to Fig. 3.3V.11 for test setup. Time scale: 1 μ s/div.

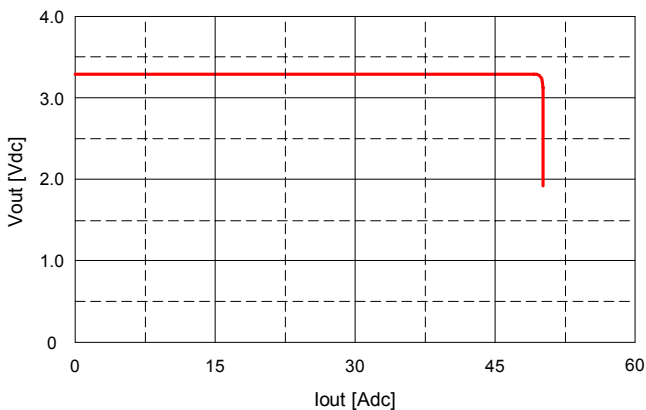


Fig. 3.3V.14: Output voltage vs. load current showing current limit point and converter shutdown point. Input voltage has almost no effect on current limit characteristic.

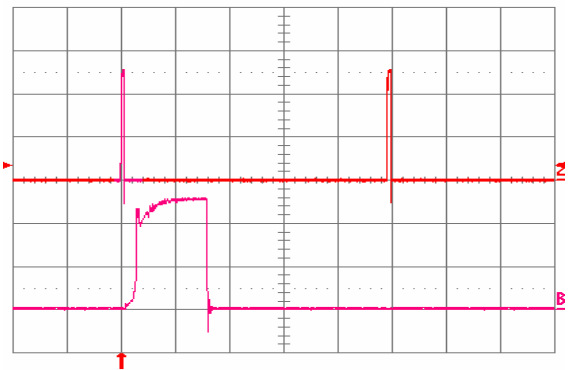


Fig. 3.3V.15: Load current (top trace, 20 A/div, 20 ms/div) into a 10 m Ω short circuit during restart, at $V_{in} = 48$ V. Bottom trace (20 A/div, 1 ms/div) is an expansion of the on-time portion of the top trace.

QM48T40 DC-DC Converter Data Sheet

36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



Electrical Specifications: QM48T40025 (2.5 Volts Out)

Conditions: $T_A = 25^\circ\text{C}$, Airflow = 300 LFM (1.5 m/s), $V_{in} = 48\text{ VDC}$, $V_{out} = 2.5\text{ VDC}$ unless otherwise specified.

Parameter	Notes	Min	Typ	Max	Units
Input Characteristics					
Maximum Input Current	40 ADC, 2.5 VDC Out @ 36 VDC In			3.2	ADC
Input Stand-by Current	$V_{in} = 48\text{ V}$, converter disabled		3		mADC
Input No Load Current (0 load on the output)	$V_{in} = 48\text{ V}$, converter enabled		50		mADC
Input Reflected-Ripple Current	25 MHz bandwidth		10		$\text{mA}_{\text{PK-PK}}$
Input Voltage Ripple Rejection	120 Hz		TBD		dB
Output Characteristics					
Output Voltage Set Point (no load)	-40°C to 85°C	2.475	2.500	2.525	VDC
Output Regulation					
Over Line			± 2	± 5	mV
Over Load			± 2	± 5	mV
Output Voltage Range	Over line, load and temperature	2.462		2.538	VDC
Output Ripple and Noise – 25 MHz bandwidth	Full load + 10 μF tantalum + 1 μF ceramic		30	50	$\text{mV}_{\text{PK-PK}}$
External Load Capacitance	Plus full load (resistive)			40,000	μF
Output Current Range		0		40	ADC
Current Limit Inception	Non-latching	42	47	52	ADC
Peak Short-Circuit Current	Non-latching, Short = 10 $\text{m}\Omega$		50	60	A
RMS Short-Circuit Current	Non-latching		10	15	Arms
Dynamic Response					
Load Change 25% of Iout Max, $di/dt = 1\text{ A}/\mu\text{s}$	$C_o = 470\text{ }\mu\text{F}$ tantalum + 1 μF ceramic		120		mV
Setting Time to 1%			100		μs
Efficiency					
100% Load			89		%
50% Load			91		%

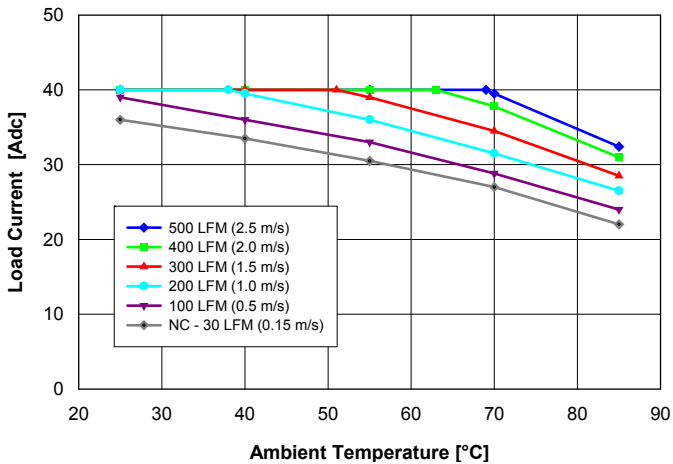


Fig. 2.5V.1: Available load current vs. ambient air temperature and airflow rates for QM48T40025 converter with B height pins mounted vertically with air flowing from pin 3 to pin 1, MOSFET temperature $\leq 120^\circ\text{C}$, $V_{in} = 48\text{ V}$.

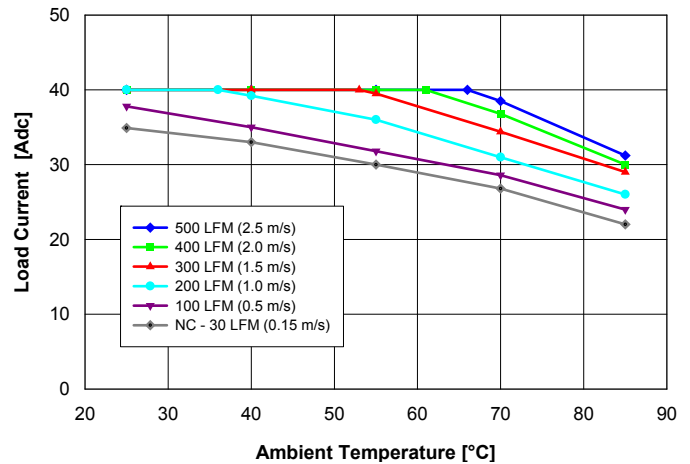


Fig. 2.5V.2: Available load current vs. ambient air temperature and airflow rates for QM48T40025 converter with B height pins mounted horizontally with air flowing from pin 3 to pin 1, MOSFET temperature $\leq 120^\circ\text{C}$, $V_{in} = 48\text{ V}$.

Note: NC – Natural convection

QM48T40 DC-DC Converter Data Sheet
36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



QM48T40025 (2.5 Volts Out)

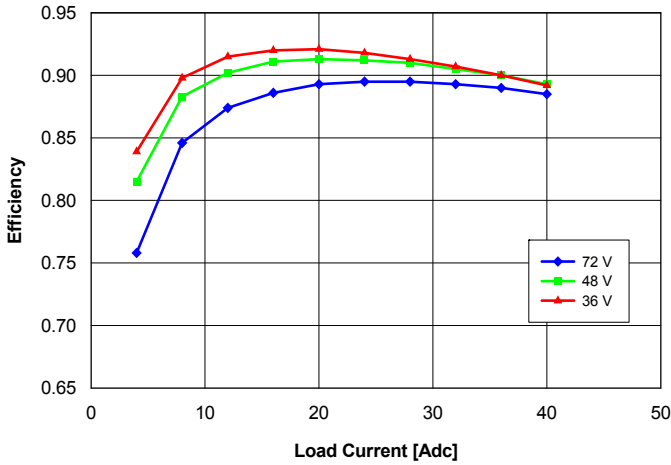


Fig. 2.5V.3: Efficiency vs. load current and input voltage for converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and Ta = 25 °C.

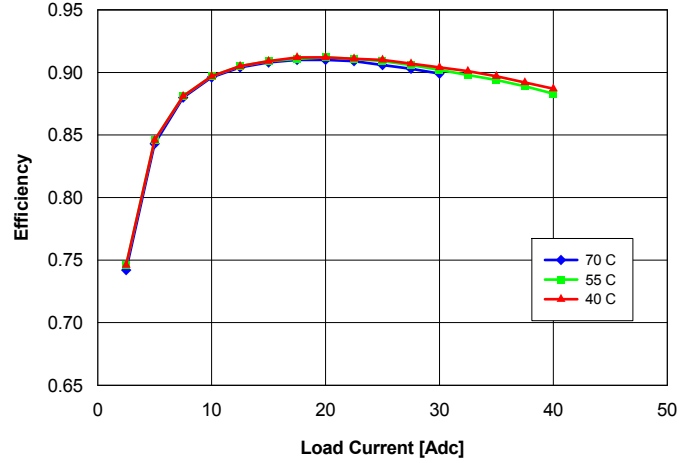


Fig. 2.5V.4: Efficiency vs. load current and ambient temperature for converter mounted vertically with Vin = 48 V and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

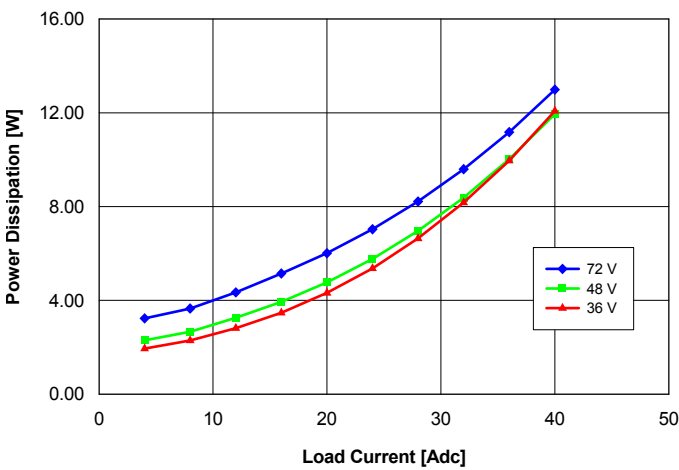


Fig. 2.5V.5: Power dissipation vs. load current and input voltage for converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and Ta = 25 °C.

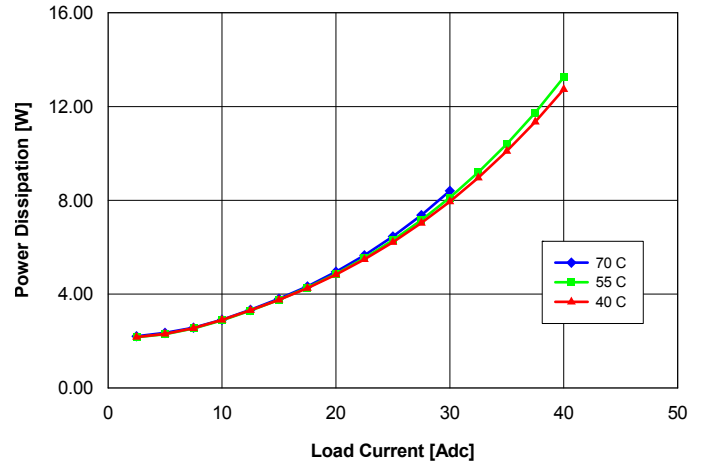


Fig. 2.5V.6: Power dissipation vs. load current and ambient temperature for converter mounted vertically with Vin = 48 V and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

QM48T40 DC-DC Converter Data Sheet
36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



QM48T40025 (2.5 Volts Out)

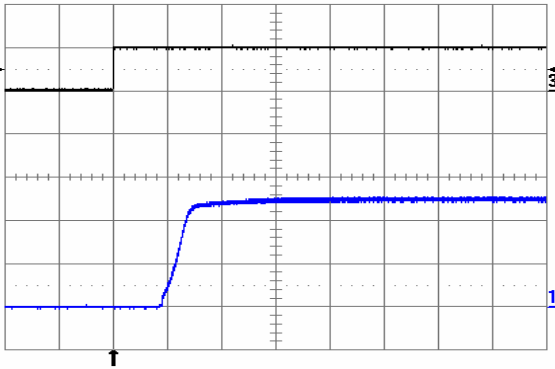


Fig. 2.5V.7: Turn-on transient at full rated load current (resistive) with no output capacitor at $V_{in} = 48\text{ V}$, triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (1 V/div.) Time scale: 2 ms/div.

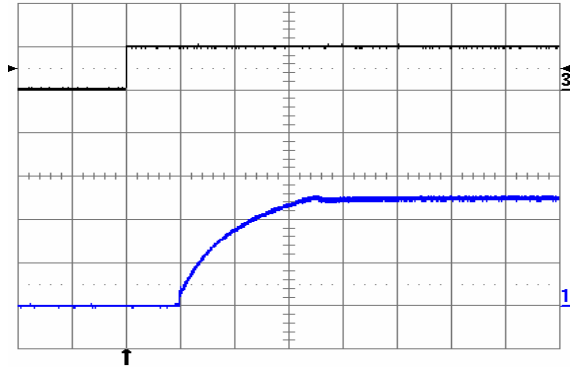


Fig. 2.5V.8: Turn-on transient at full rated load current (resistive) plus 40,000 μF at $V_{in} = 48\text{ V}$, triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (1 V/div.). Time scale: 2 ms/div.

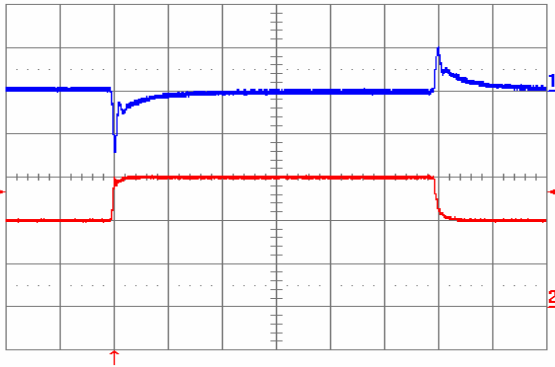


Fig. 2.5V.9: Output voltage response to load current step-change (20 A – 30 A – 20 A) at $V_{in} = 48\text{ V}$. Top trace: output voltage (100 mV/div.). Bottom trace: load current (10 A/div). Current slew rate: 1 A/ μs . $C_o = 470\text{ }\mu\text{F}$ tantalum + 1 μF ceramic. Time scale: 0.2 ms/div.

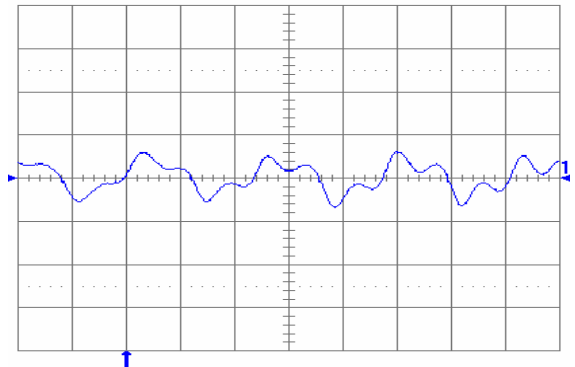


Fig. 2.5V.10: Output voltage ripple (20 mV/div.) at full rated load current into a resistive load with $C_o = 10\text{ }\mu\text{F}$ tantalum + 1 μF ceramic and $V_{in} = 48\text{ V}$. Time scale: 1 μs /div.

QM48T40 DC-DC Converter Data Sheet
36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



QM48T40025 (2.5 Volts Out)

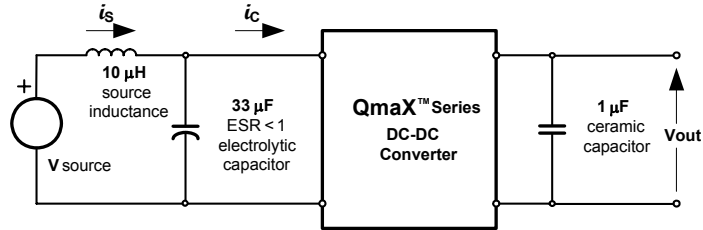


Fig. 2.5V.11: Test Setup for measuring input reflected ripple currents, i_c and i_s .

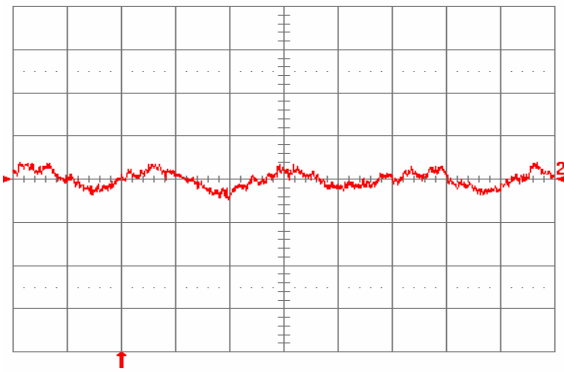


Fig. 2.5V.12: Input reflected ripple current, i_s (10 mA/div), measured through 10 μ H at the source at full rated load current and $V_{in} = 48$ V. Refer to Fig. 2.5V.11 for test setup. Time scale: 1 μ s/div.

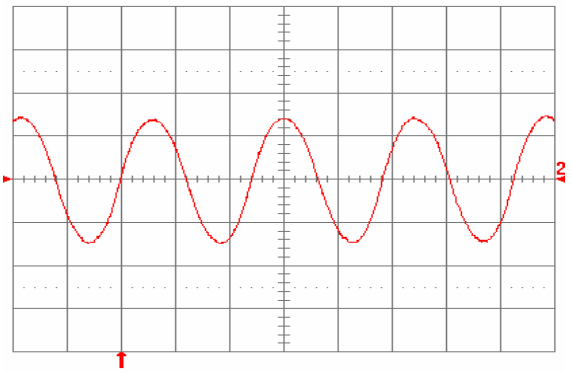


Fig. 2.5V.13: Input reflected ripple current, i_c (100 mA/div), measured at input terminals at full rated load current and $V_{in} = 48$ V. Refer to Fig. 2.5V.11 for test setup. Time scale: 1 μ s/div.

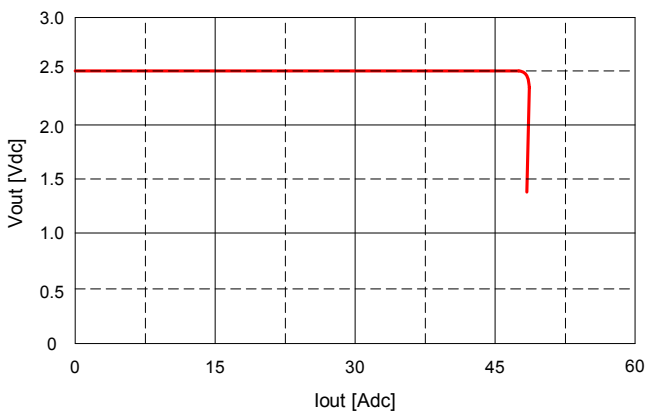


Fig. 2.5V.14: Output voltage vs. load current showing current limit point and converter shutdown point. Input voltage has almost no effect on current limit characteristic.

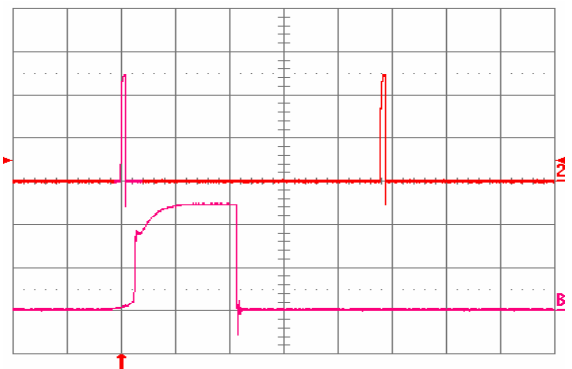


Fig. 2.5V.15: Load current (top trace, 20 A/div, 20 ms/div) into a 10 m Ω short circuit during restart, at $V_{in} = 48$ V. Bottom trace (20 A/div, 1 ms/div) is an expansion of the on-time portion of the top trace.

QM48T40 DC-DC Converter Data Sheet

36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



Electrical Specifications: QM48T40020 (2.0 Volts Out)

Conditions: $T_A = 25^\circ\text{C}$, Airflow = 300 LFM (1.5 m/s), $V_{in} = 48\text{ VDC}$, $V_{out} = 2.0\text{ VDC}$ unless otherwise specified.

Parameter	Notes	Min	Typ	Max	Units
Input Characteristics					
Maximum Input Current	40 ADC, 2.0 VDC Out @ 36 VDC In			2.6	ADC
Input Stand-by Current	$V_{in} = 48\text{ V}$, converter disabled		3		mADC
Input No Load Current (0 load on the output)	$V_{in} = 48\text{ V}$, converter enabled		40		mADC
Input Reflected-Ripple Current	25 MHz bandwidth		7.5		$\text{mA}_{\text{PK-PK}}$
Input Voltage Ripple Rejection	120 Hz		TBD		dB
Output Characteristics					
Output Voltage Set Point (no load)	-40°C to 85°C	1.98	2.000	2.02	VDC
Output Regulation					
Over Line			± 2	± 5	mV
Over Load			± 2	± 5	mV
Output Voltage Range	Over line, load and temperature	1.970		2.030	VDC
Output Ripple and Noise – 25 MHz bandwidth	Full load + 10 μF tantalum + 1 μF ceramic		30	50	$\text{mV}_{\text{PK-PK}}$
External Load Capacitance	Plus full load (resistive)			40,000	μF
Output Current Range		0		40	ADC
Current Limit Inception	Non-latching	42	47	52	ADC
Peak Short-Circuit Current	Non-latching, Short = 10 $\text{m}\Omega$		50	60	A
RMS Short-Circuit Current	Non-latching		10	15	Arms
Dynamic Response					
Load Change 25% of Iout Max, $di/dt = 1\text{ A}/\mu\text{s}$	$C_o = 470\text{ }\mu\text{F}$ tantalum + 1 μF ceramic		120		mV
Setting Time to 1%			110		μs
Efficiency					
100% Load			88		%
50% Load			90		%

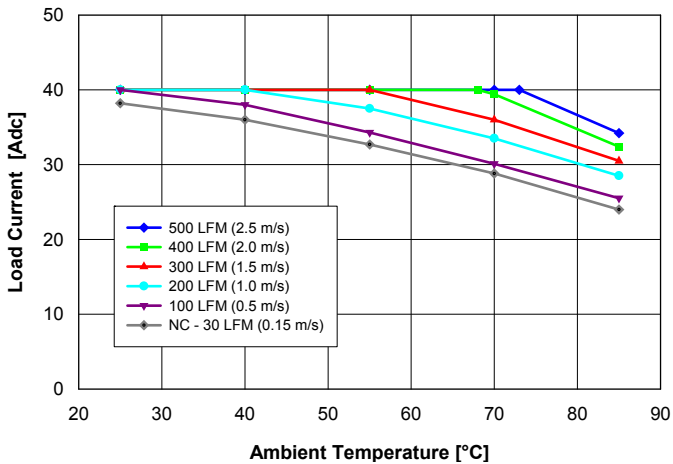


Fig. 2.0V.1: Available load current vs. ambient air temperature and airflow rates for QM48T40020 converter with B height pins mounted vertically with air flowing from pin 3 to pin 1, MOSFET temperature $\leq 120^\circ\text{C}$, $V_{in} = 48\text{ V}$.

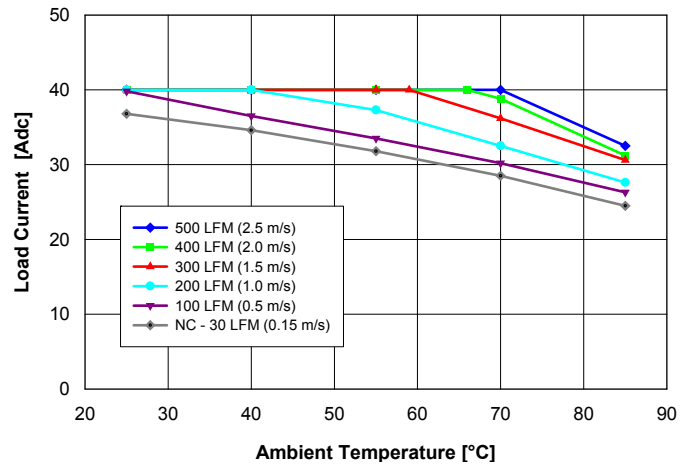


Fig. 2.0V.2: Available load current vs. ambient air temperature and airflow rates for QM48T40020 converter with B height pins mounted horizontally with air flowing from pin 3 to pin 1, MOSFET temperature $\leq 120^\circ\text{C}$, $V_{in} = 48\text{ V}$.

Note: NC – Natural convection

QM48T40 DC-DC Converter Data Sheet
36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



QM48T40020 (2.0 Volts Out)

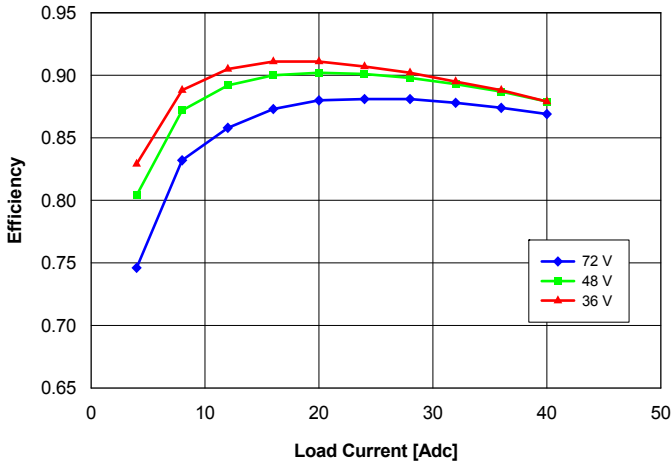


Fig. 2.0V.3: Efficiency vs. load current and input voltage for converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and Ta = 25 °C.

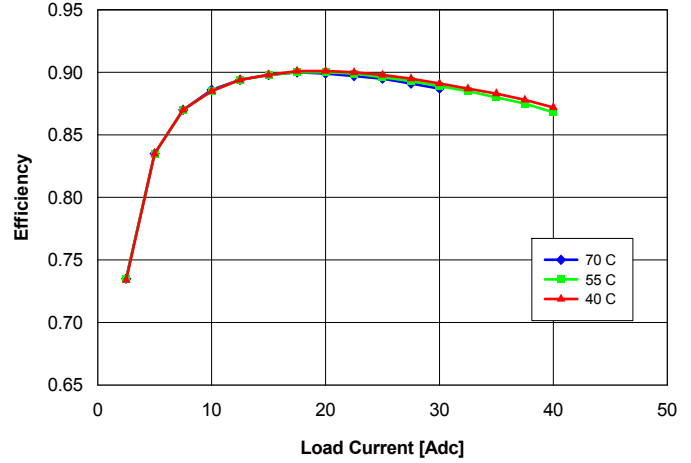


Fig. 2.0V.4: Efficiency vs. load current and ambient temperature for converter mounted vertically with Vin = 48 V and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

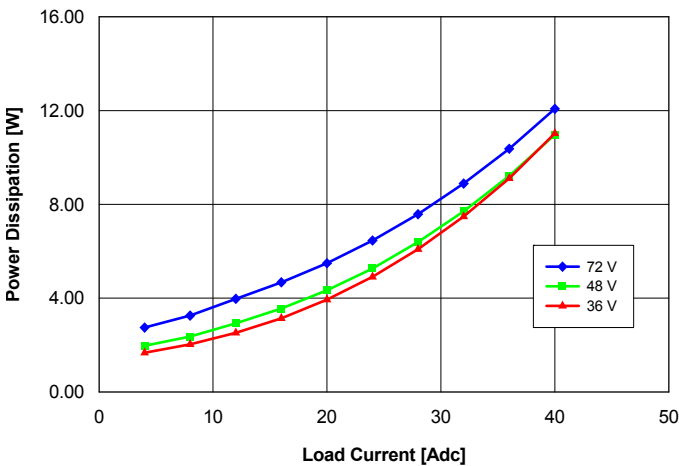


Fig. 2.0V.5: Power dissipation vs. load current and input voltage for converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and Ta = 25 °C.

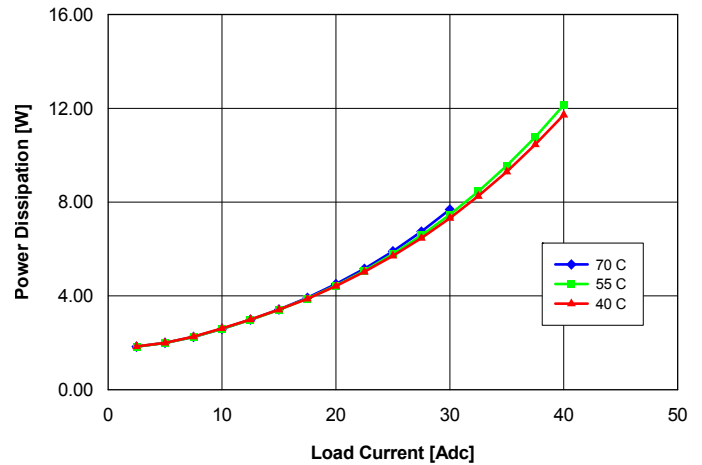


Fig. 2.0V.6: Power dissipation vs. load current and ambient temperature for converter mounted vertically with Vin = 48 V and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

QM48T40 DC-DC Converter Data Sheet
36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



QM48T40020 (2.0 Volts Out)

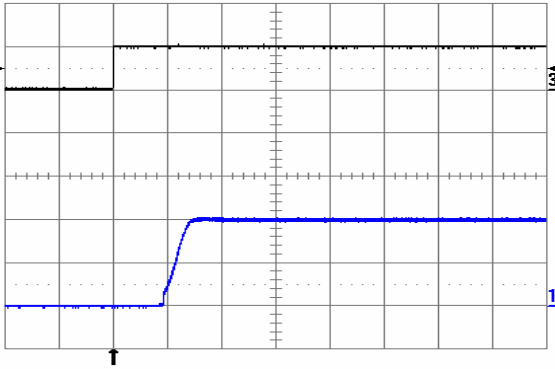


Fig. 2.0V.7: Turn-on transient at full rated load current (resistive) with no output capacitor at $V_{in} = 48\text{ V}$, triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (1 V/div.). Time scale: 2 ms/div.

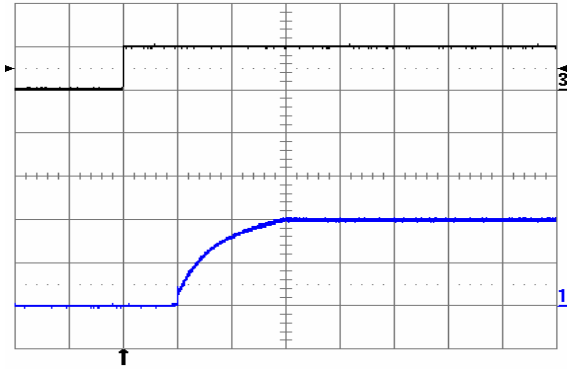


Fig. 2.0V.8: Turn-on transient at full rated load current (resistive) plus 40,000 μF at $V_{in} = 48\text{ V}$, triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (1 V/div.). Time scale: 2 ms/div.

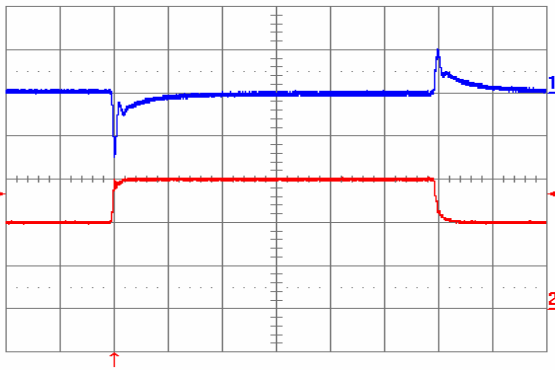


Fig. 2.0V.9: Output voltage response to load current step-change (20 A – 30 A – 20 A) at $V_{in} = 48\text{ V}$. Top trace: output voltage (100 mV/div.). Bottom trace: load current (10 A/div). Current slew rate: 1 A/ μs . $C_o = 470\text{ }\mu\text{F}$ tantalum + 1 μF ceramic. Time scale: 0.2 ms/div.

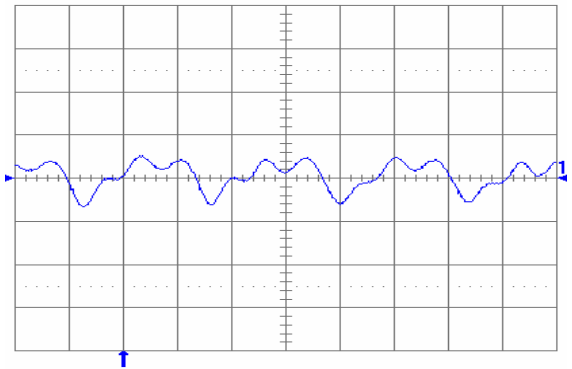


Fig. 2.0V.10: Output voltage ripple (20 mV/div.) at full rated load current into a resistive load with $C_o = 10\text{ }\mu\text{F}$ tantalum + 1 μF ceramic and $V_{in} = 48\text{ V}$. Time scale: 1 μs /div.

QM48T40 DC-DC Converter Data Sheet
36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



QM48T40020 (2.0 Volts Out)

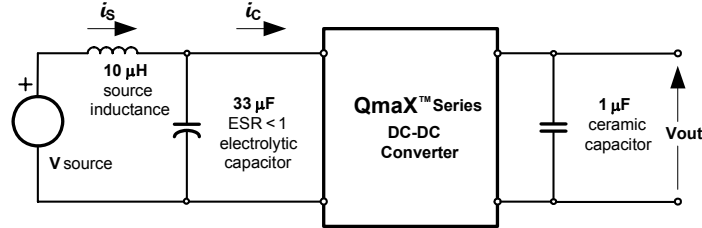


Fig. 2.0V.11: Test Setup for measuring input reflected ripple currents, i_c and i_s .

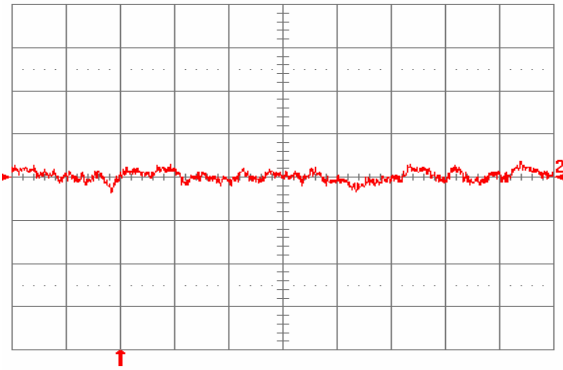


Fig. 2.0V.12: Input reflected ripple current, i_s (10 mA/div), measured through 10 μ H at the source at full rated load current and $V_{in} = 48$ V. Refer to Fig. 2.0V.11 for test setup. Time scale: 1 μ s/div.

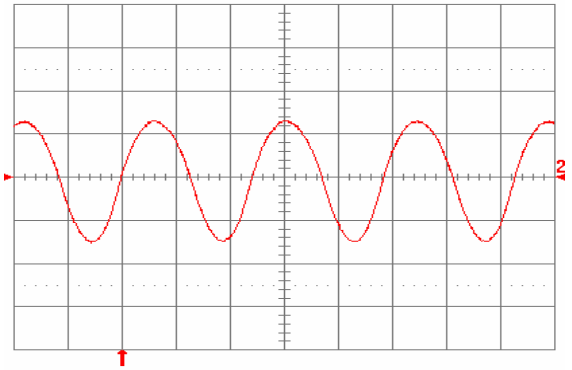


Fig. 2.0V.13: Input reflected ripple current, i_c (100 mA/div), measured at input terminals at full rated load current and $V_{in} = 48$ V. Refer to Fig. 2.0V.11 for test setup. Time scale: 1 μ s/div.

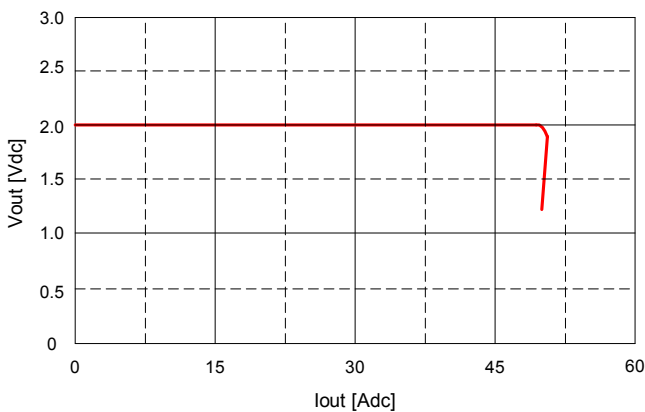


Fig. 2.0V.14: Output voltage vs. load current showing current limit point and converter shutdown point. Input voltage has almost no effect on current limit characteristic.

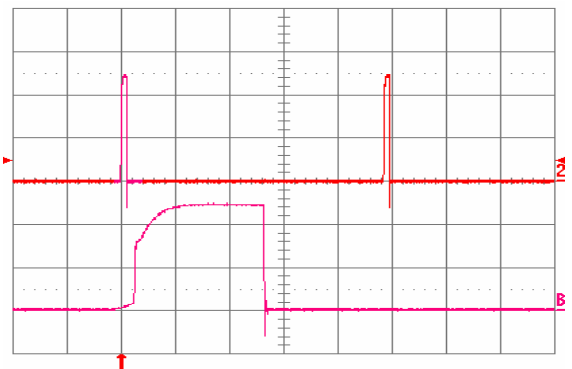


Fig. 2.0V.15: Load current (top trace, 20 A/div, 20 ms/div) into a 10 $m\Omega$ short circuit during restart, at $V_{in} = 48$ V. Bottom trace (20 A/div, 1 ms/div) is an expansion of the on-time portion of the top trace.

QM48T40 DC-DC Converter Data Sheet

36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



Electrical Specifications: QM48T40018 (1.8 Volts Out)

Conditions: $T_A = 25^\circ\text{C}$, Airflow = 300 LFM (1.5 m/s), $V_{in} = 48\text{ VDC}$, $V_{out} = 1.8\text{ VDC}$ unless otherwise specified.

Parameter	Notes	Min	Typ	Max	Units
Input Characteristics					
Maximum Input Current	40 ADC, 1.8 VDC Out @ 36 VDC In			2.4	ADC
Input Stand-by Current	$V_{in} = 48\text{ V}$, converter disabled		3		mADC
Input No Load Current (0 load on the output)	$V_{in} = 48\text{ V}$, converter enabled		38		mADC
Input Reflected-Ripple Current	25 MHz bandwidth		10		$\text{mA}_{\text{PK-PK}}$
Input Voltage Ripple Rejection	120 Hz		TBD		dB
Output Characteristics					
Output Voltage Set Point (no load)	-40°C to 85°C	1.782	1.800	1.818	VDC
Output Regulation					
Over Line			± 2	± 4	mV
Over Load			± 2	± 5	mV
Output Voltage Range	Over line, load and temperature	1.773		1.827	VDC
Output Ripple and Noise – 25 MHz bandwidth	Full load + 10 μF tantalum + 1 μF ceramic		30	50	$\text{mV}_{\text{PK-PK}}$
External Load Capacitance	Plus full load (resistive)			40,000	μF
Output Current Range		0		40	ADC
Current Limit Inception	Non-latching	42	47	52	ADC
Peak Short-Circuit Current	Non-latching, Short = 10 $\text{m}\Omega$		50	60	A
RMS Short-Circuit Current	Non-latching		10	15	Arms
Dynamic Response					
Load Change 25% of $I_{out\text{ Max}}$, $di/dt = 1\text{ A}/\mu\text{s}$	$C_o = 470\text{ }\mu\text{F}$ tantalum + 1 μF ceramic		120		mV
Setting Time to 1%			120		μs
Efficiency					
100% Load			87		%
50% Load			89.5		%

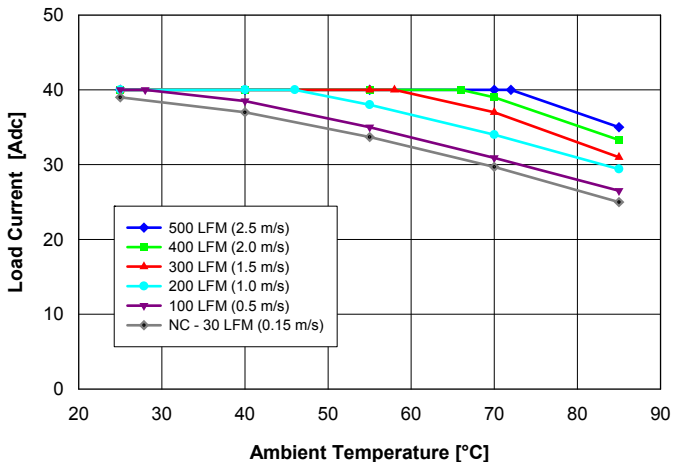


Fig. 1.8V.1: Available load current vs. ambient air temperature and airflow rates for QM48T40018 converter with B height pins mounted vertically with air flowing from pin 3 to pin 1, MOSFET temperature $\leq 120^\circ\text{C}$, $V_{in} = 48\text{ V}$.

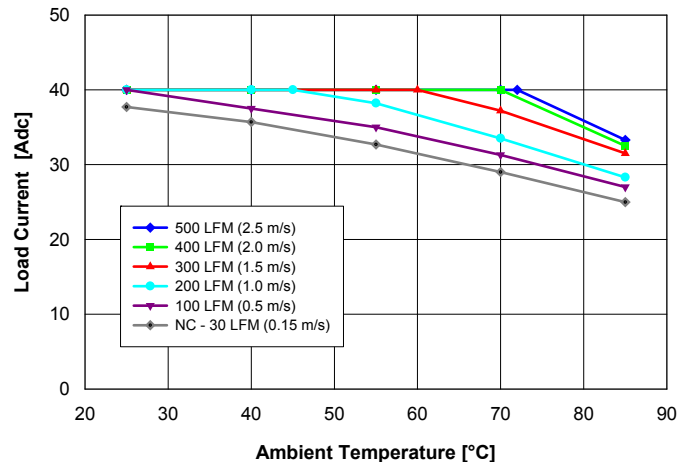


Fig. 1.8V.2: Available load current vs. ambient air temperature and airflow rates for QM48T40018 converter with B height pins mounted horizontally with air flowing from pin 3 to pin 1, MOSFET temperature $\leq 120^\circ\text{C}$, $V_{in} = 48\text{ V}$.

Note: NC – Natural convection

QM48T40 DC-DC Converter Data Sheet
36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



QM48T40018 (1.8 Volts Out)

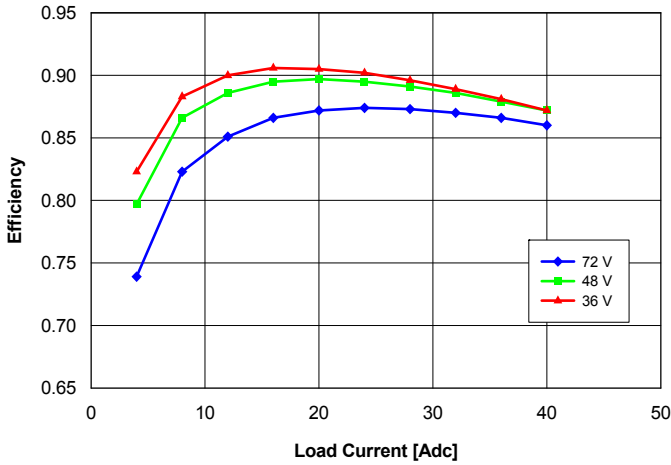


Fig. 1.8V.3: Efficiency vs. load current and input voltage for converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and Ta = 25 °C.

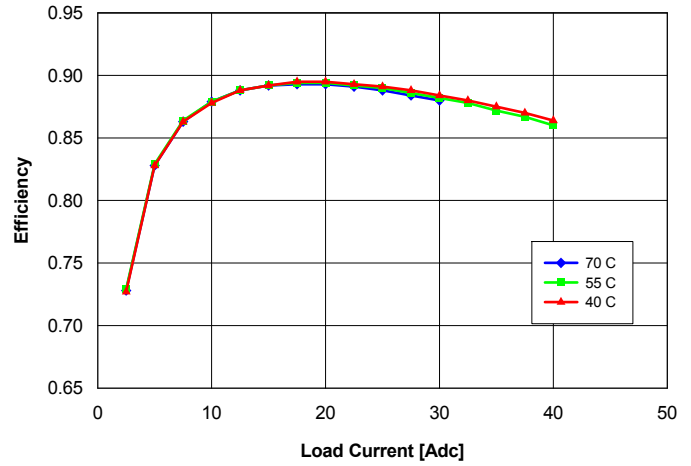


Fig. 1.8V.4: Efficiency vs. load current and ambient temperature for converter mounted vertically with Vin = 48 V and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

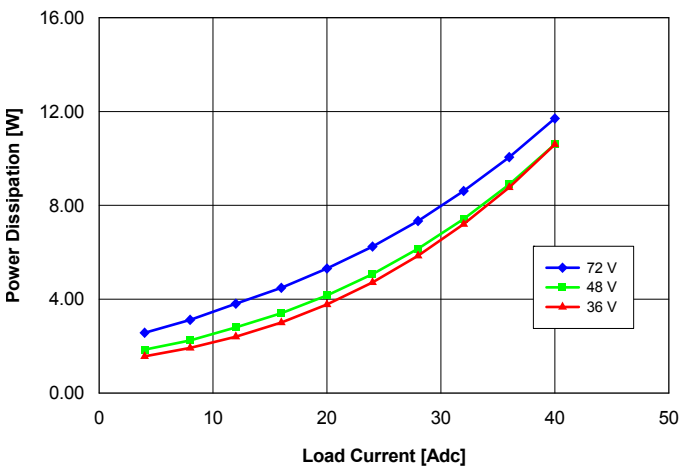


Fig. 1.8V.5: Power dissipation vs. load current and input voltage for converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and Ta = 25 °C.

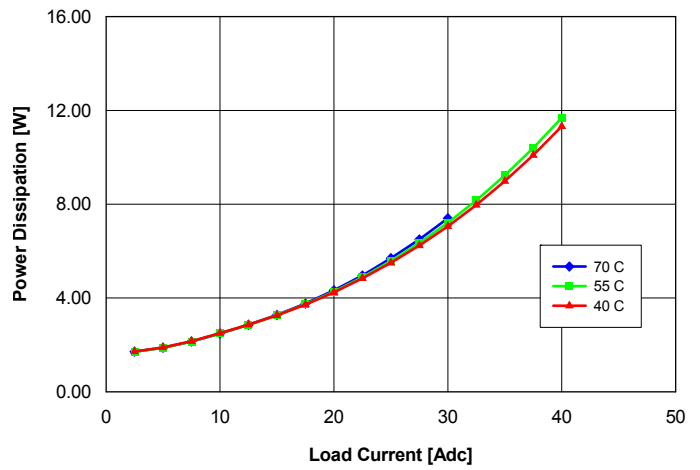


Fig. 1.8V.6: Power dissipation vs. load current and ambient temperature for converter mounted vertically with Vin = 48 V and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

QM48T40 DC-DC Converter Data Sheet
36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



QM48T40018 (1.8 Volts Out)

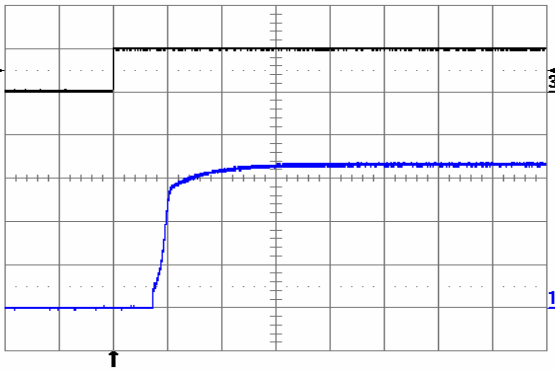


Fig. 1.8V.7: Turn-on transient at full rated load current (resistive) with no output capacitor at $V_{in} = 48\text{ V}$, triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (1 V/div.) Time scale: 2 ms/div.

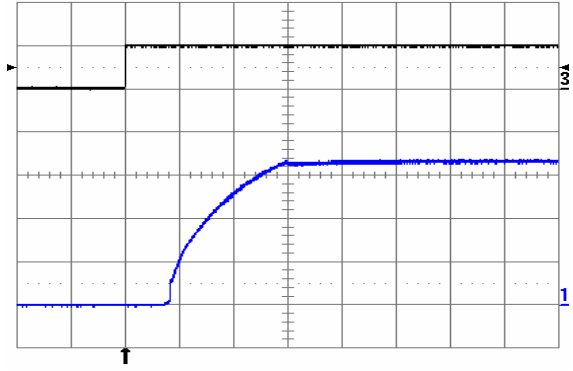


Fig. 1.8V.8: Turn-on transient at full rated load current (resistive) plus 40,000 μF at $V_{in} = 48\text{ V}$, triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (1 V/div.) Time scale: 2 ms/div.

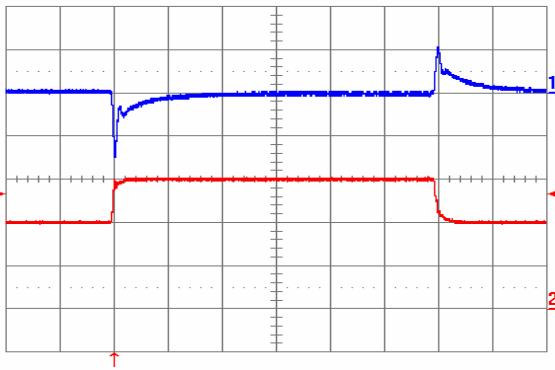


Fig. 1.8V.9: Output voltage response to load current step-change (20 A – 30 A – 20 A) at $V_{in} = 48\text{ V}$. Top trace: output voltage (100 mV/div.). Bottom trace: load current (10 A/div). Current slew rate: 1 A/ μs . $C_o = 470\text{ }\mu\text{F}$ tantalum + 1 μF ceramic. Time scale: 0.2 ms/div.

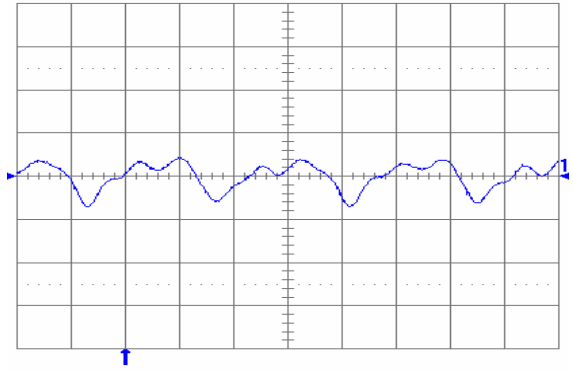


Fig. 1.8V.10: Output voltage ripple (20 mV/div.) at full rated load current into a resistive load with $C_o = 10\text{ }\mu\text{F}$ tantalum + 1 μF ceramic and $V_{in} = 48\text{ V}$. Time scale: 1 μs /div.

QM48T40 DC-DC Converter Data Sheet
36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



QM48T40018 (1.8 Volts Out)

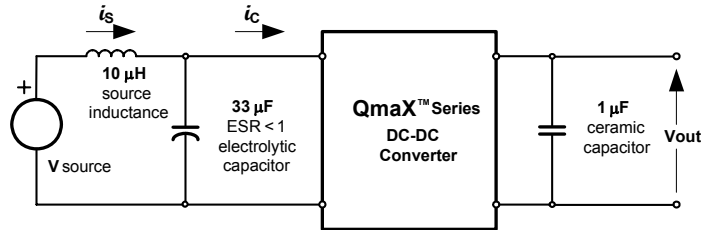


Fig. 1.8V.11: Test Setup for measuring input reflected ripple currents, i_c and i_s .

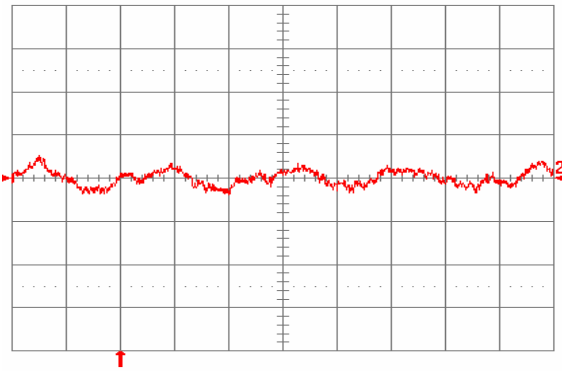


Fig. 1.8V.12: Input reflected ripple current, i_s (10 mA/div), measured through 10 μ H at the source at full rated load current and $V_{in} = 48$ V. Refer to Fig. 1.8V.11 for test setup. Time scale: 1 μ s/div.

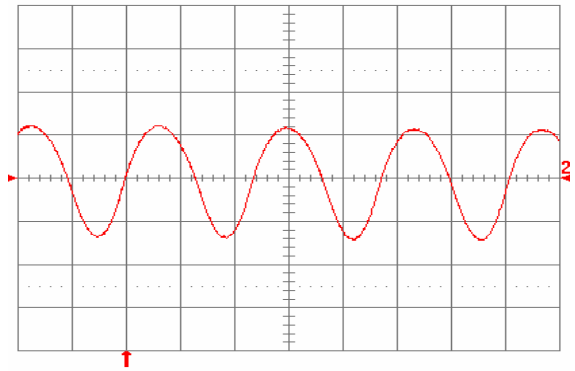


Fig. 1.8V.13: Input reflected ripple current, i_c (100 mA/div), measured at input terminals at full rated load current and $V_{in} = 48$ V. Refer to Fig. 1.8V.11 for test setup. Time scale: 1 μ s/div.

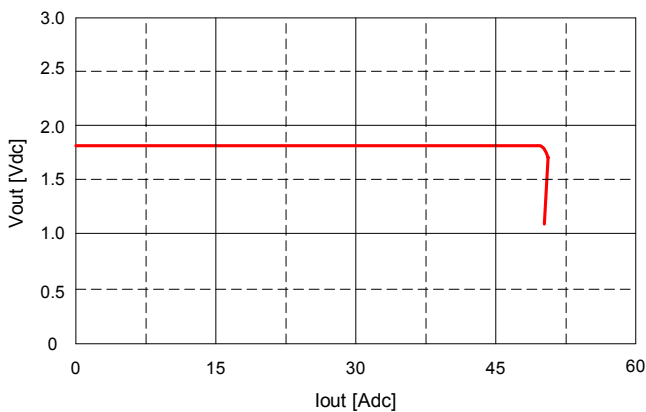


Fig. 1.8V.14: Output voltage vs. load current showing current limit point and converter shutdown point. Input voltage has almost no effect on current limit characteristic.

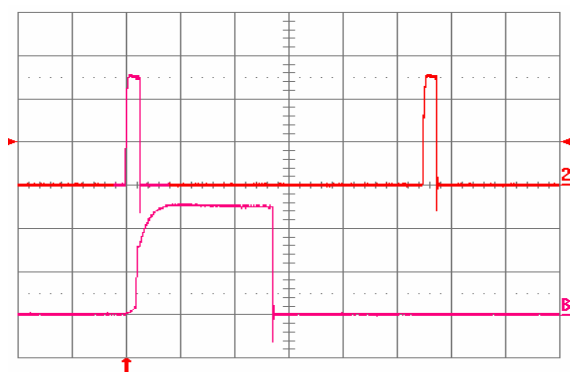


Fig. 1.8V.15: Load current (top trace, 20 A/div, 20 ms/div) into a 10 m Ω short circuit during restart, at $V_{in} = 48$ V. Bottom trace (20 A/div, 2 ms/div) is an expansion of the on-time portion of the top trace.

QM48T40 DC-DC Converter Data Sheet

36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



Electrical Specifications: QM48T40015 (1.5 Volts Out)

Conditions: $T_A = 25^\circ\text{C}$, Airflow = 300 LFM (1.5 m/s), $V_{in} = 48\text{ VDC}$, $V_{out} = 1.5\text{ VDC}$ unless otherwise specified.

Parameter	Notes	Min	Typ	Max	Units
Input Characteristics					
Maximum Input Current	40 ADC, 1.5 VDC Out @ 36 VDC In			2	ADC
Input Stand-by Current	$V_{in} = 48\text{ V}$, converter disabled		3		mADC
Input No Load Current (0 load on the output)	$V_{in} = 48\text{ V}$, converter enabled		32		mADC
Input Reflected-Ripple Current	25 MHz bandwidth		7.5		$\text{mA}_{\text{PK-PK}}$
Input Voltage Ripple Rejection	120 Hz		TBD		dB
Output Characteristics					
Output Voltage Set Point (no load)	-40°C to 85°C	1.485	1.500	1.515	VDC
Output Regulation					
Over Line			± 2	± 4	mV
Over Load			± 2	± 4	mV
Output Voltage Range	Over line, load and temperature	1.477		1.523	VDC
Output Ripple and Noise – 25 MHz bandwidth	Full load + 10 μF tantalum + 1 μF ceramic		30	50	$\text{mV}_{\text{PK-PK}}$
External Load Capacitance	Plus full load (resistive)			40,000	μF
Output Current Range		0		40	ADC
Current Limit Inception	Non-latching	42	47	52	ADC
Peak Short-Circuit Current	Non-latching, Short = 10 m Ω		50	60	A
RMS Short-Circuit Current	Non-latching		10	15	Arms
Dynamic Response					
Load Change 25% of Iout Max, di/dt = 1 A/ μs	$C_o = 470\text{ }\mu\text{F}$ tantalum + 1 μF ceramic		120		mV
Setting Time to 1%			150		μs
Efficiency					
100% Load			85.5		%
50% Load			88		%

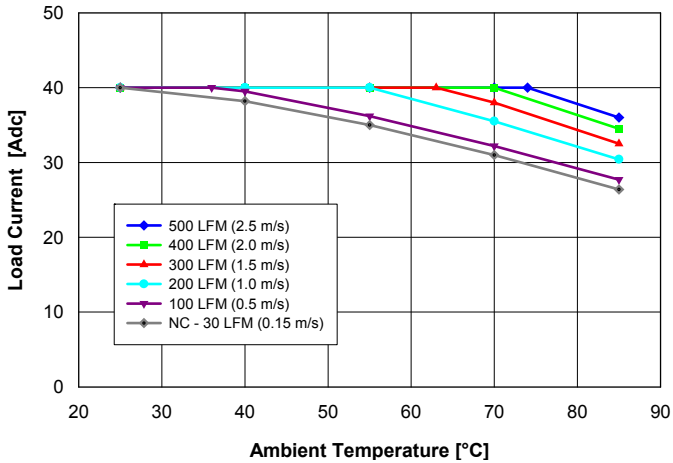


Fig. 1.5V.1: Available load current vs. ambient air temperature and airflow rates for QM48T40015 converter with B height pins mounted vertically with air flowing from pin 3 to pin 1, MOSFET temperature $\leq 120^\circ\text{C}$, $V_{in} = 48\text{ V}$.

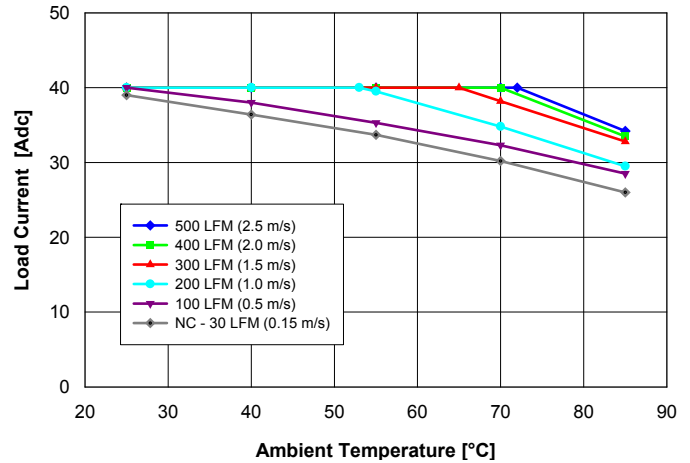


Fig. 1.5V.2: Available load current vs. ambient air temperature and airflow rates for QM48T40015 converter with B height pins mounted horizontally with air flowing from pin 3 to pin 1, MOSFET temperature $\leq 120^\circ\text{C}$, $V_{in} = 48\text{ V}$.

Note: NC – Natural convection

QM48T40 DC-DC Converter Data Sheet
36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



QM48T40015 (1.5 Volts Out)

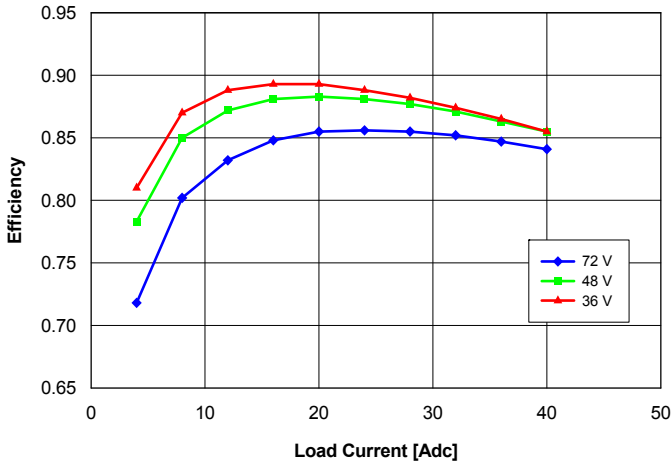


Fig. 1.5V.3: Efficiency vs. load current and input voltage for converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and Ta = 25 °C.

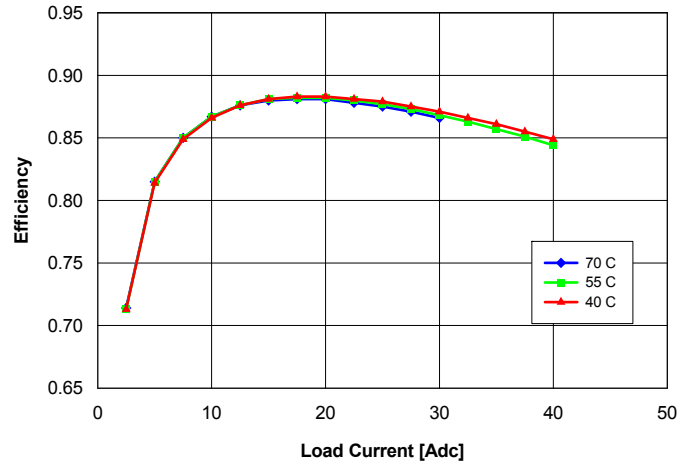


Fig. 1.5V.4: Efficiency vs. load current and ambient temperature for converter mounted vertically with Vin = 48 V and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

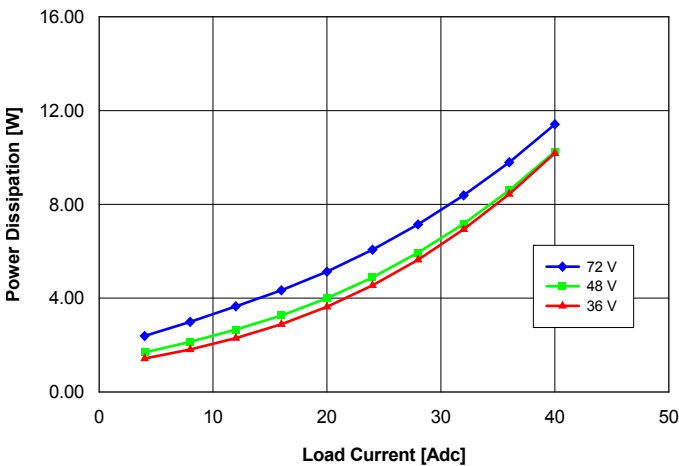


Fig. 1.5V.5: Power dissipation vs. load current and input voltage for converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and Ta = 25 °C.

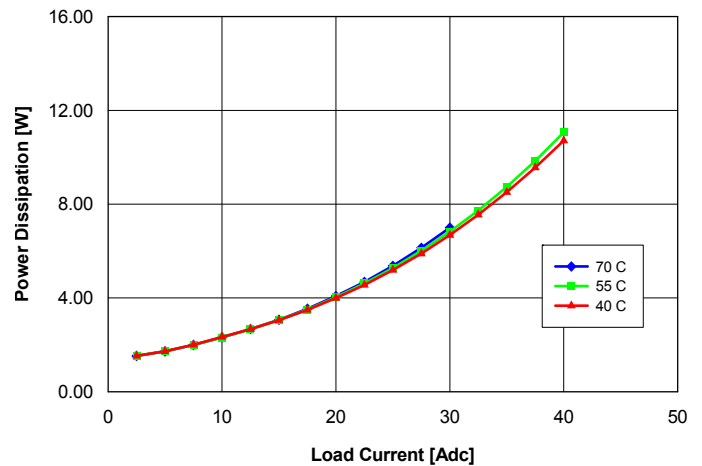


Fig. 1.5V.6: Power dissipation vs. load current and ambient temperature for converter mounted vertically with Vin = 48 V and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

QM48T40 DC-DC Converter Data Sheet
36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



QM48T40015 (1.5 Volts Out)

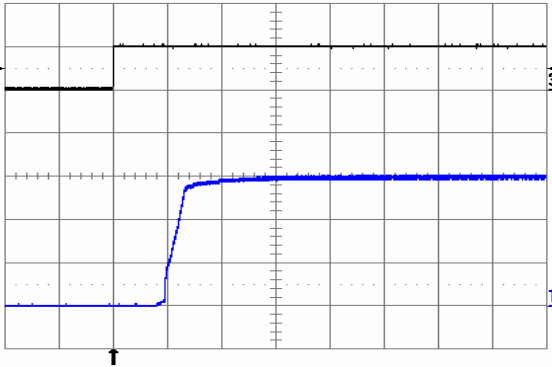


Fig. 1.5V.7: Turn-on transient at full rated load current (resistive) with no output capacitor at $V_{in} = 48\text{ V}$, triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (0.5 V/div.) Time scale: 2 ms/div.

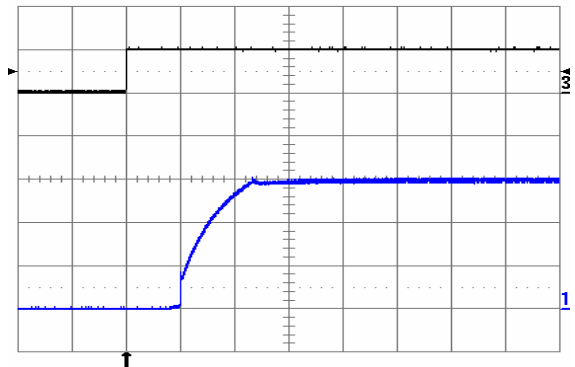


Fig. 1.5V.8: Turn-on transient at full rated load current (resistive) plus 40,000 μF at $V_{in} = 48\text{ V}$, triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (0.5 V/div.) Time scale: 2 ms/div.

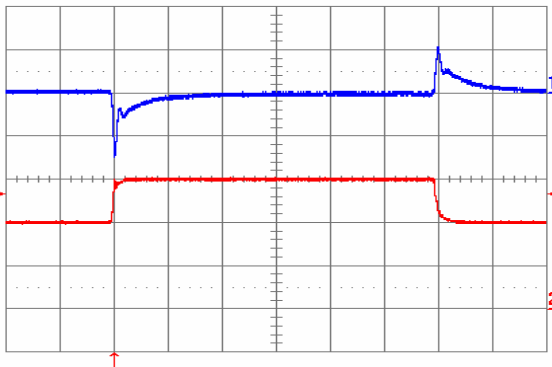


Fig. 1.5V.9: Output voltage response to load current step-change (20 A – 30 A – 20 A) at $V_{in} = 48\text{ V}$. Top trace: output voltage (100 mV/div.). Bottom trace: load current (10 A/div). Current slew rate: 1 A/ μs . $C_o = 470\text{ }\mu\text{F}$ tantalum + 1 μF ceramic. Time scale: 0.2 ms/div.

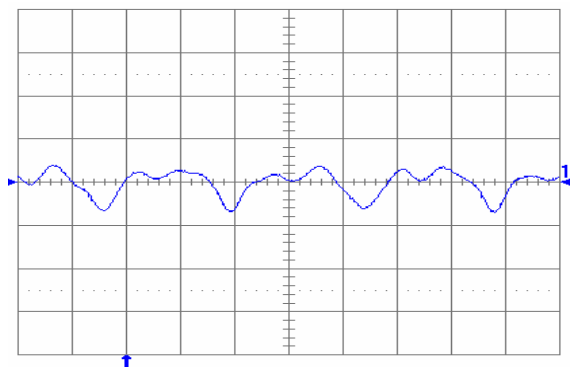


Fig. 1.5V.10: Output voltage ripple (20 mV/div.) at full rated load current into a resistive load with $C_o = 10\text{ }\mu\text{F}$ tantalum + 1 μF ceramic and $V_{in} = 48\text{ V}$. Time scale: 1 μs /div.

QM48T40 DC-DC Converter Data Sheet
36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



QM48T40015 (1.5 Volts Out)

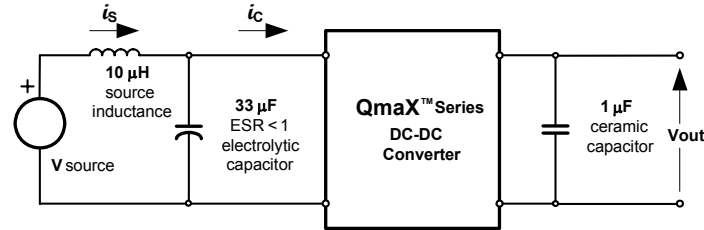


Fig. 1.5V.11: Test setup for measuring input reflected ripple currents, i_c and i_s .

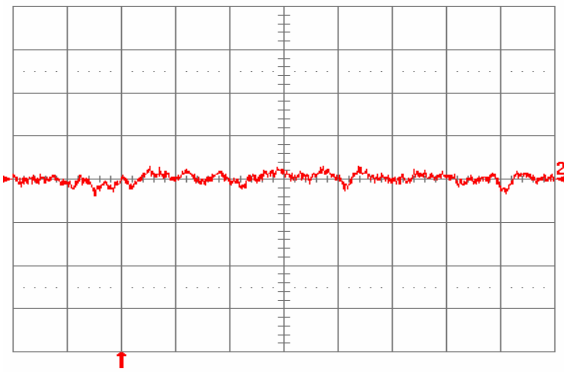


Fig. 1.5V.12: Input reflected ripple current, i_s (10 mA/div), measured through 10 μ H at the source at full rated load current and $V_{in} = 48$ V. Refer to Fig. 1.5V.11 for test setup. Time scale: 1 μ s/div.

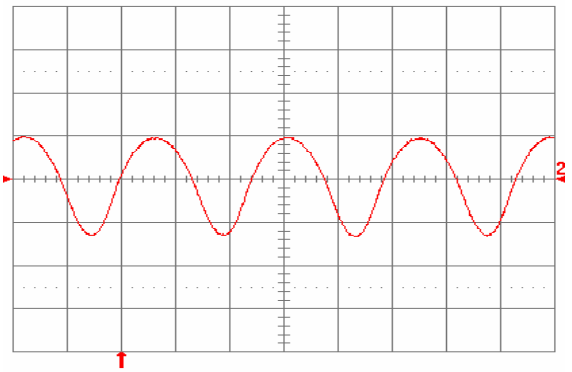


Fig. 1.5V.13: Input reflected ripple current, i_c (100 mA/div), measured at input terminals at full rated load current and $V_{in} = 48$ V. Refer to Fig. 1.5V.11 for test setup. Time scale: 1 μ s/div.

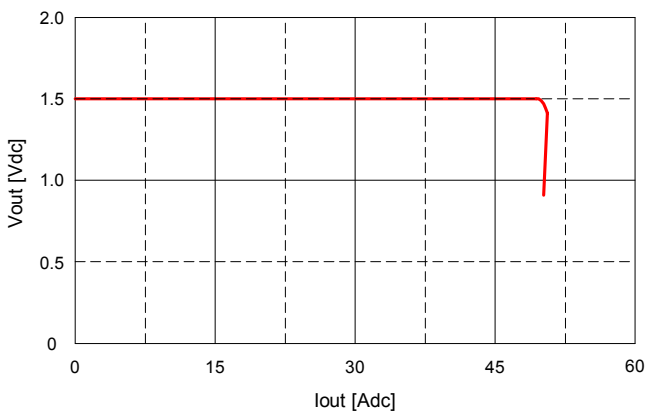


Fig. 1.5V.14: Output voltage vs. load current showing current limit point and converter shutdown point. Input voltage has almost no effect on current limit characteristic.

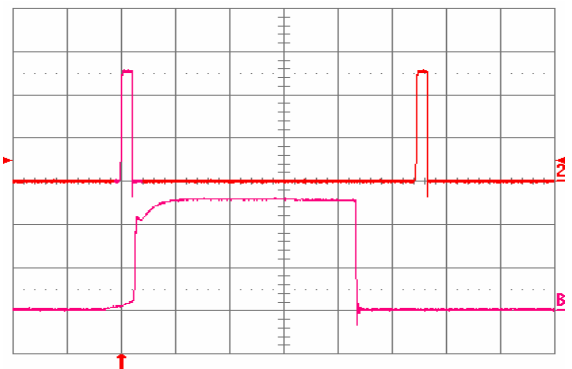


Fig. 1.5V.15: Load current (top trace, 20 A/div, 20 ms/div) into a 10 $m\Omega$ short circuit during restart, at $V_{in} = 48$ V. Bottom trace (20 A/div, 1 ms/div) is an expansion of the on-time portion of the top trace.

QM48T40 DC-DC Converter Data Sheet

36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



Electrical Specifications: QM48T40012 (1.2 Volts Out)

Conditions: $T_A = 25^\circ\text{C}$, Airflow = 300 LFM (1.5 m/s), $V_{in} = 48\text{ VDC}$, $V_{out} = 1.2\text{ VDC}$ unless otherwise specified.

Parameter	Notes	Min	Typ	Max	Units
Input Characteristics					
Maximum Input Current	40 ADC, 1.2 VDC Out @ 36 VDC In			1.7	ADC
Input Stand-by Current	$V_{in} = 48\text{ V}$, converter disabled		3		mADC
Input No Load Current (0 load on the output)	$V_{in} = 48\text{ V}$, converter enabled		28		mADC
Input Reflected-Ripple Current	25 MHz bandwidth		7.5		$\text{mA}_{\text{PK-PK}}$
Input Voltage Ripple Rejection	120 Hz		TBD		dB
Output Characteristics					
Output Voltage Set Point (no load)	-40°C to 85°C	1.188	1.200	1.212	VDC
Output Regulation					
Over Line			± 1	± 3	mV
Over Load			± 1	± 3	mV
Output Voltage Range	Over line, load and temperature	1.182		1.218	VDC
Output Ripple and Noise – 25 MHz bandwidth	Full load + 10 μF tantalum + 1 μF ceramic		30	50	$\text{mV}_{\text{PK-PK}}$
External Load Capacitance	Plus full load (resistive)			40,000	μF
Output Current Range		0		40	ADC
Current Limit Inception	Non-latching	42	47	52	ADC
Peak Short-Circuit Current	Non-latching, Short = 10 $\text{m}\Omega$		50	60	A
RMS Short-Circuit Current	Non-latching		10	15	Arms
Dynamic Response					
Load Change 25% of Iout Max, $di/dt = 1\text{ A}/\mu\text{s}$	$C_o = 470\text{ }\mu\text{F}$ tantalum + 1 μF ceramic		120		mV
Setting Time to 1%			250		μs
Efficiency					
100% Load			83		%
50% Load			86.5		%

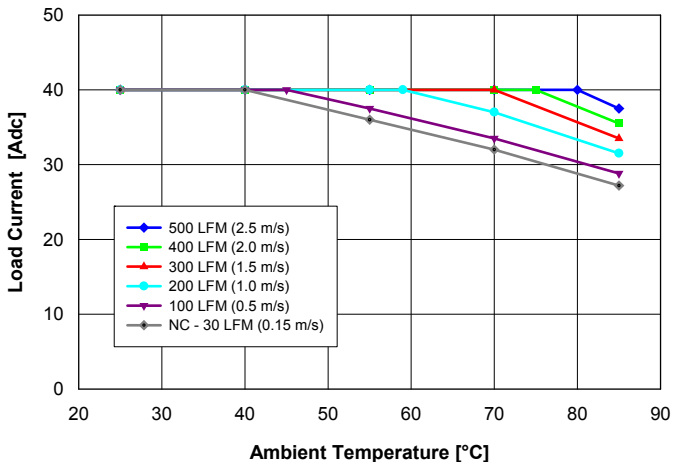


Fig. 1.2V.1: Available load current vs. ambient air temperature and airflow rates for QM48T40012 converter with B height pins mounted vertically with air flowing from pin 3 to pin 1, MOSFET temperature $\leq 120^\circ\text{C}$, $V_{in} = 48\text{ V}$.

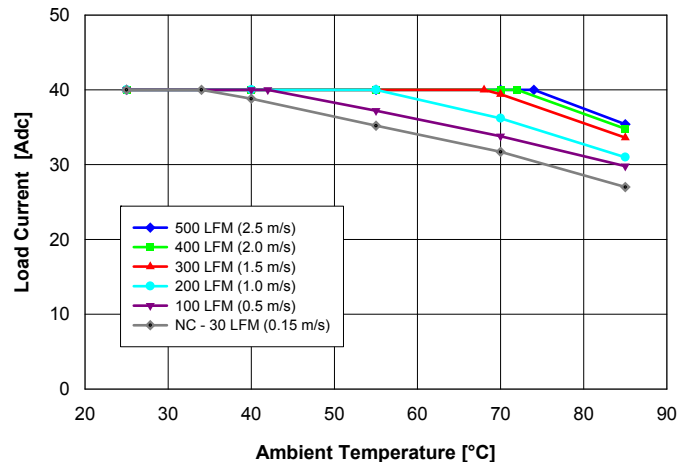


Fig. 1.2V.2: Available load current vs. ambient air temperature and airflow rates for QM48T40012 converter with B height pins mounted horizontally with air flowing from pin 3 to pin 1, MOSFET temperature $\leq 120^\circ\text{C}$, $V_{in} = 48\text{ V}$.

Note: NC – Natural convection

QM48T40 DC-DC Converter Data Sheet
36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



QM48T40012 (1.2 Volts Out)

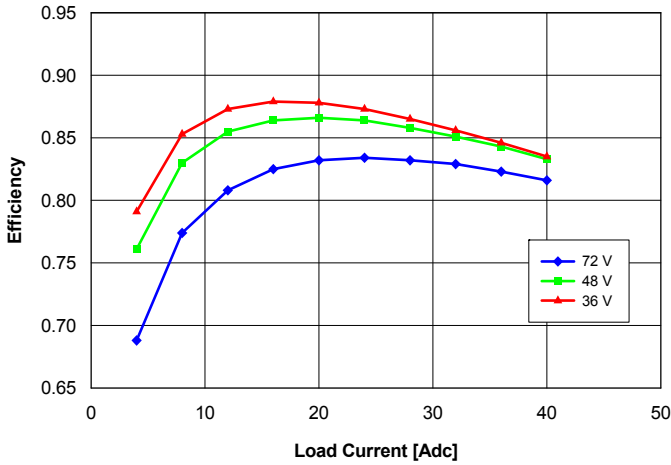


Fig. 1.2V.3: Efficiency vs. load current and input voltage for converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and Ta = 25 °C.

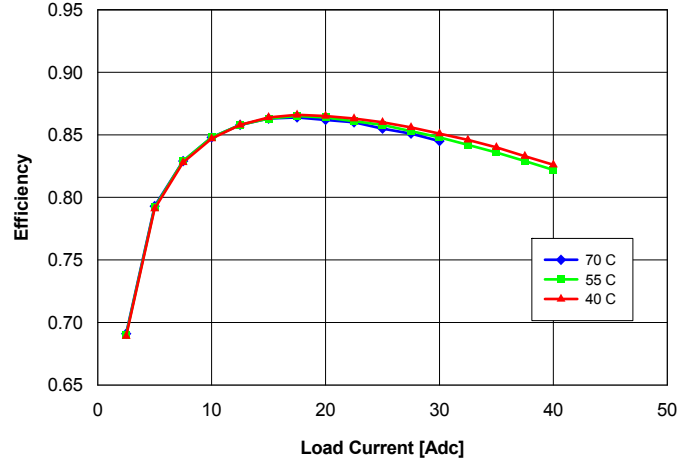


Fig. 1.2V.4: Efficiency vs. load current and ambient temperature for converter mounted vertically with Vin = 48 V and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

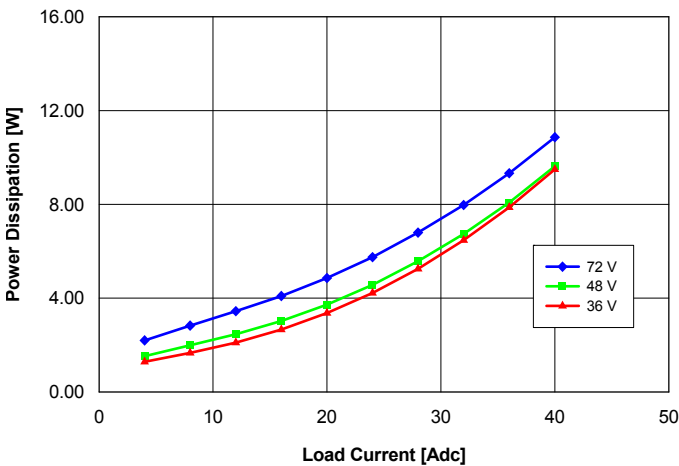


Fig. 1.2V.5: Power dissipation vs. load current and input voltage for converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and Ta = 25 °C.

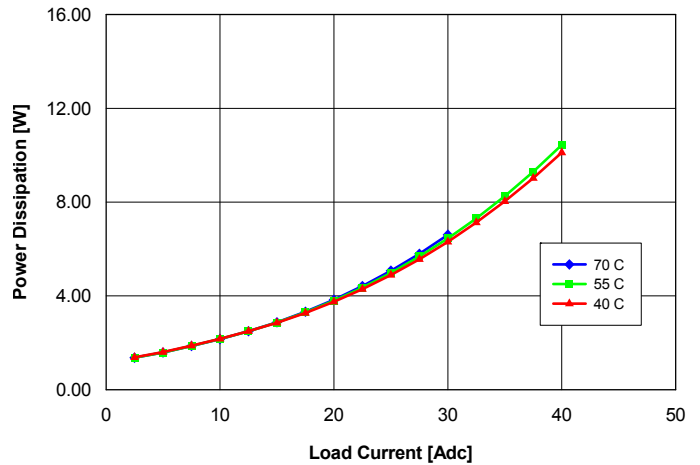


Fig. 1.2V.6: Power dissipation vs. load current and ambient temperature for converter mounted vertically with Vin = 48 V and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

QM48T40 DC-DC Converter Data Sheet
36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



QM48T40012 (1.2 Volts Out)

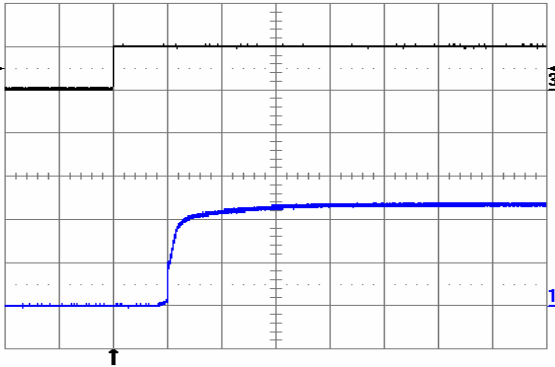


Fig. 1.2V.7: Turn-on transient at full rated load current (resistive) with no output capacitor at $V_{in} = 48\text{ V}$, triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (0.5 V/div.) Time scale: 2 ms/div.

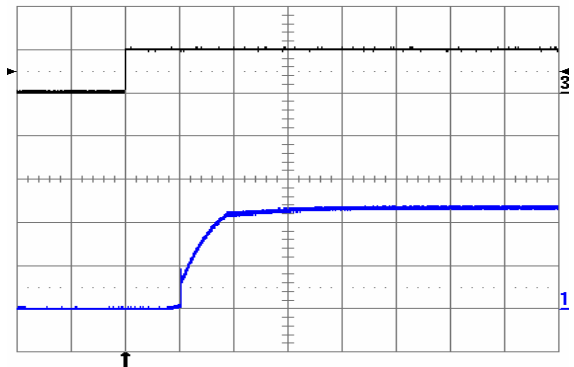


Fig. 1.2V.8: Turn-on transient at full rated load current (resistive) plus 40,000 μF at $V_{in} = 48\text{ V}$, triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (0.5 V/div.) Time scale: 2 ms/div.

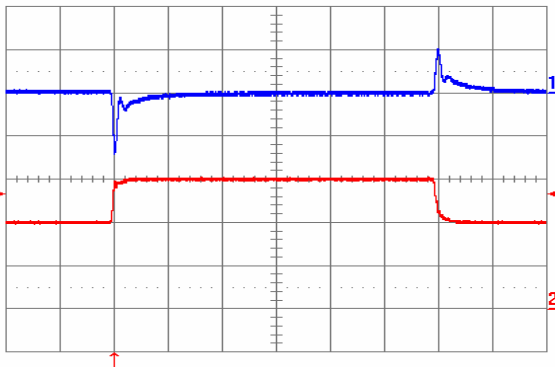


Fig. 1.2V.9: Output voltage response to load current step-change (20 A – 30 A – 20 A) at $V_{in} = 48\text{ V}$. Top trace: output voltage (100 mV/div.). Bottom trace: load current (10 A/div). Current slew rate: 1 A/ μs . $C_o = 470\text{ }\mu\text{F}$ tantalum + 1 μF ceramic. Time scale: 0.2 ms/div.

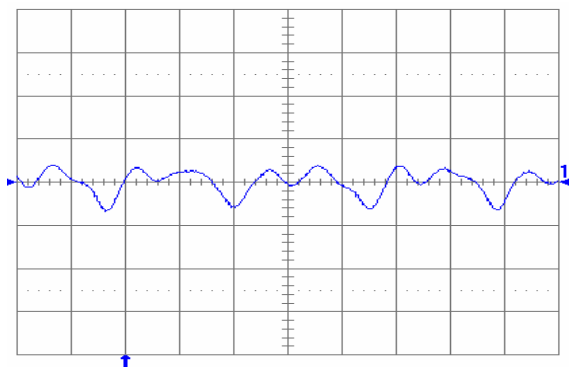


Fig. 1.2V.10: Output voltage ripple (20 mV/div.) at full rated load current into a resistive load with $C_o = 10\text{ }\mu\text{F}$ tantalum + 1 μF ceramic and $V_{in} = 48\text{ V}$. Time scale: 1 μs /div.

QM48T40 DC-DC Converter Data Sheet
36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



QM48T40012 (1.2 Volts Out)

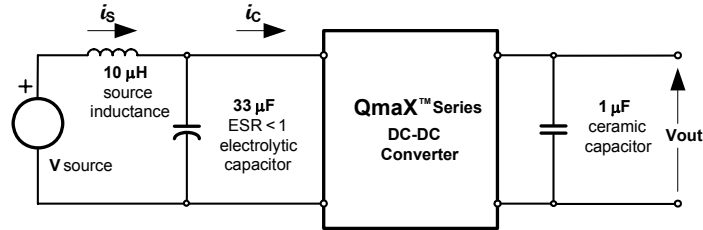


Fig. 1.2V.11: Test setup for measuring input reflected ripple currents, i_c and i_s .

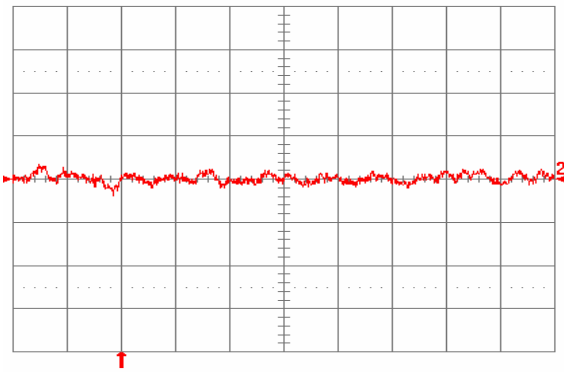


Fig. 1.2V.12: Input reflected ripple current, i_s (10 mA/div), measured through 10 μ H at the source at full rated load current and $V_{in} = 48$ V. Refer to Fig. 1.2V.11 for test setup. Time scale: 1 μ s/div.

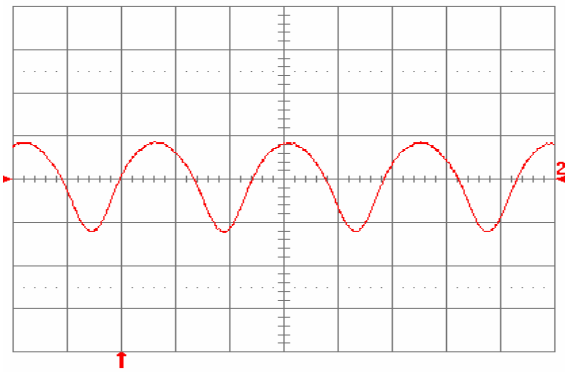


Fig. 1.2V.13: Input reflected ripple current, i_c (100 mA/div), measured at input terminals at full rated load current and $V_{in} = 48$ V. Refer to Fig. 1.2V.11 for test setup. Time scale: 1 μ s/div.

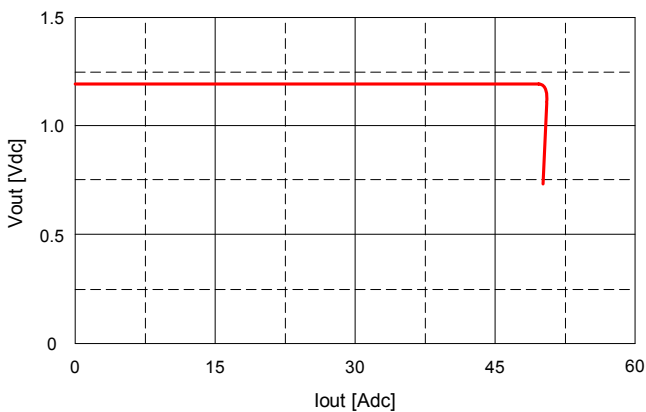


Fig. 1.2V.14: Output voltage vs. load current showing current limit point and converter shutdown point. Input voltage has almost no effect on current limit characteristic.

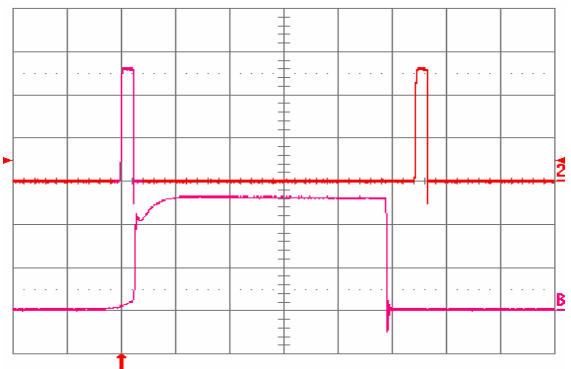


Fig. 1.2V.15: Load current (top trace, 20 A/div, 20 ms/div) into a 10 m Ω short circuit during restart, at $V_{in} = 48$ V. Bottom trace (20 A/div, 1 ms/div) is an expansion of the on-time portion of the top trace.

QM48T40 DC-DC Converter Data Sheet

36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



Electrical Specifications: QM48T40010 (1.0 Volt Out)

Conditions: $T_A = 25^\circ\text{C}$, Airflow=300 LFM (1.5 m/s), $V_{in} = 48\text{ VDC}$, $V_{out} = 1.0\text{ VDC}$ unless otherwise specified.

Parameter	Notes	Min	Typ	Max	Units
Input Characteristics					
Maximum Input Current	40 ADC, 1.0 VDC Out @ 36 VDC In			1.4	ADC
Input Stand-by Current	$V_{in} = 48\text{ V}$, converter disabled		3		mADC
Input No Load Current (0 load on the output)	$V_{in} = 48\text{ V}$, converter enabled		27		mADC
Input Reflected-Ripple Current	25 MHz bandwidth		7.5		$\text{mA}_{\text{PK-PK}}$
Input Voltage Ripple Rejection	120 Hz		TBD		dB
Output Characteristics					
Output Voltage Set Point (no load)	-40°C to 85°C	0.990	1.000	1.010	VDC
Output Regulation					
Over Line			± 1	± 3	mV
Over Load			± 1	± 3	mV
Output Voltage Range	Over line, load and temperature	0.985		1.015	VDC
Output Ripple and Noise – 25 MHz bandwidth	Full load + 10 μF tantalum + 1 μF ceramic		30	50	$\text{mV}_{\text{PK-PK}}$
External Load Capacitance	Plus full load (resistive)			40,000	μF
Output Current Range		0		40	ADC
Current Limit Inception	Non-latching	42	47	52	ADC
Peak Short-Circuit Current	Non-latching, Short = 10 m Ω		50	60	A
RMS Short-Circuit Current	Non-latching		10	15	Arms
Dynamic Response					
Load Change 25% of Iout Max, di/dt = 1 A/ μs	$C_o = 470\text{ }\mu\text{F}$ tantalum + 1 μF ceramic		120		mV
Setting Time to 1%			280		μs
Efficiency					
100% Load			81		%
50% Load			85		%

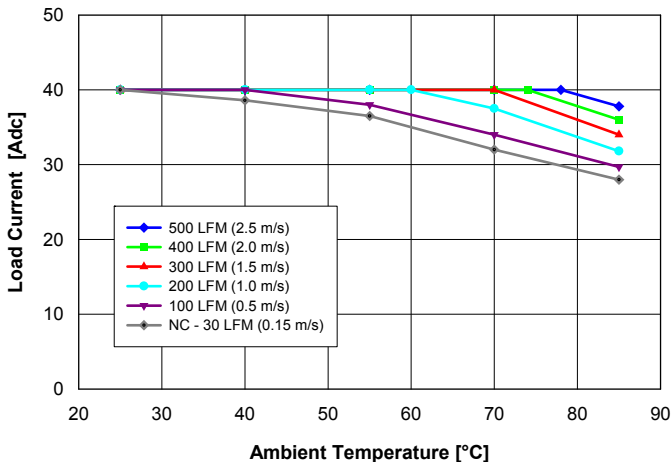


Fig. 1.0V.1: Available load current vs. ambient air temperature and airflow rates for QM48T40010 converter with B height pins mounted vertically with air flowing from pin 3 to pin 1, MOSFET temperature $\leq 120^\circ\text{C}$, $V_{in} = 48\text{ V}$.

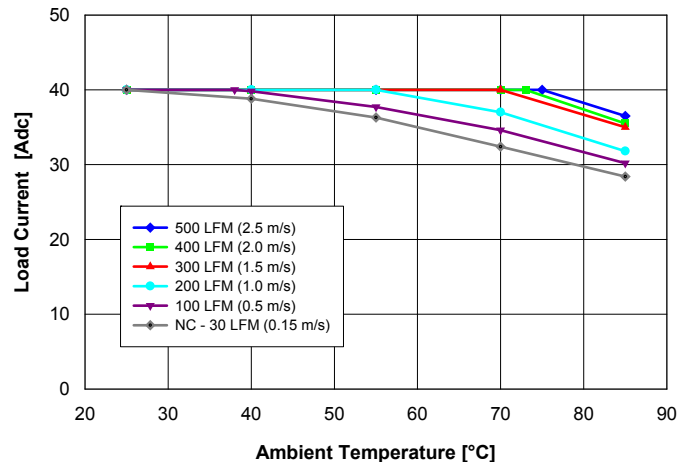


Fig. 1.0V.2: Available load current vs. ambient air temperature and airflow rates for QM48T40010 converter with B height pins mounted horizontally with air flowing from pin 3 to pin 1, MOSFET temperature $\leq 120^\circ\text{C}$, $V_{in} = 48\text{ V}$.

Note: NC – Natural convection

QM48T40 DC-DC Converter Data Sheet
36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



QM48T40010 (1.0 Volt Out)

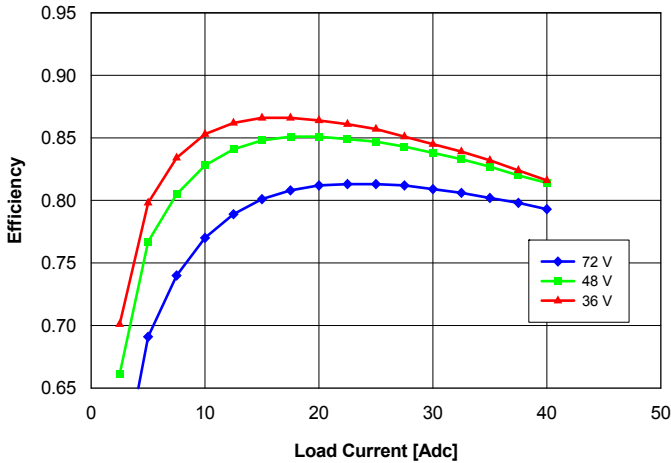


Fig. 1.0V.3: Efficiency vs. load current and input voltage for converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and Ta = 25 °C.

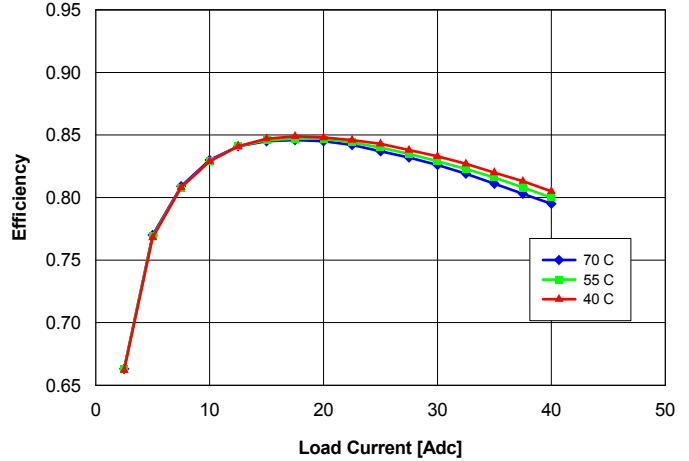


Fig. 1.0V.4: Efficiency vs. load current and ambient temperature for converter mounted vertically with Vin = 48 V and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

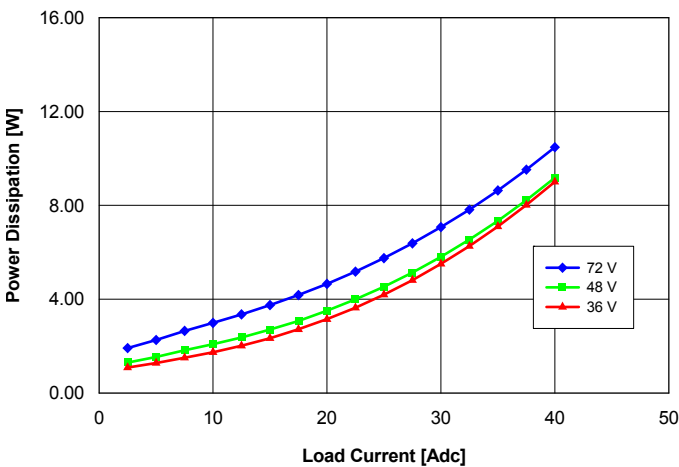


Fig. 1.0V.5: Power dissipation vs. load current and input voltage for converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and Ta = 25 °C.

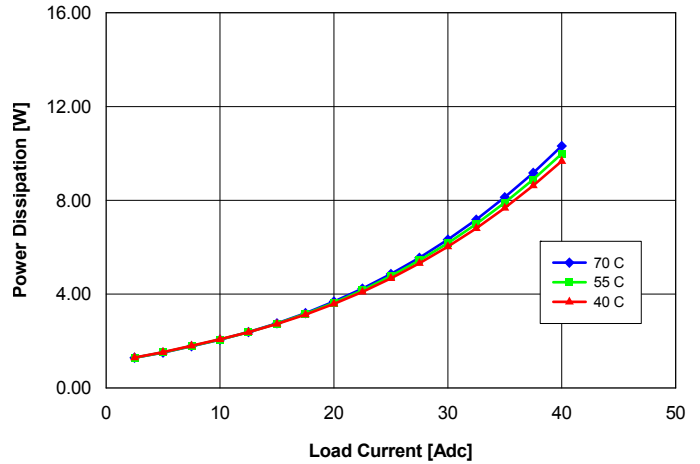


Fig. 1.0V.6: Power dissipation vs. load current and ambient temperature for converter mounted vertically with Vin = 48 V and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

QM48T40 DC-DC Converter Data Sheet
36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



QM48T40010 (1.0 Volt Out)

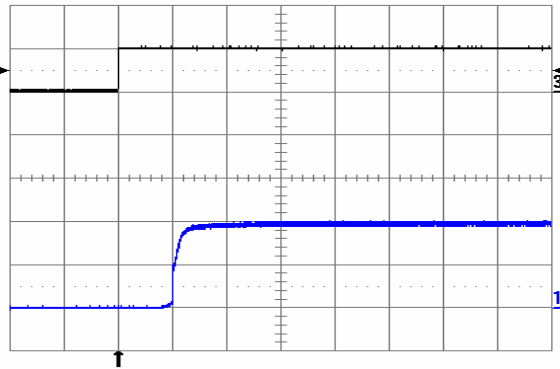


Fig. 1.0V.7: Turn-on transient at full rated load current (resistive) with no output capacitor at $V_{in} = 48\text{ V}$, triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (0.5 V/div.). Time scale: 2 ms/div.

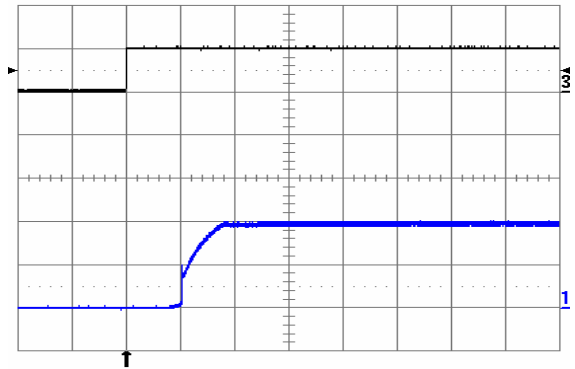


Fig. 1.0V.8: Turn-on transient at full rated load current (resistive) plus 40,000 μF at $V_{in} = 48\text{ V}$, triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (0.5 V/div.). Time scale: 2 ms/div.

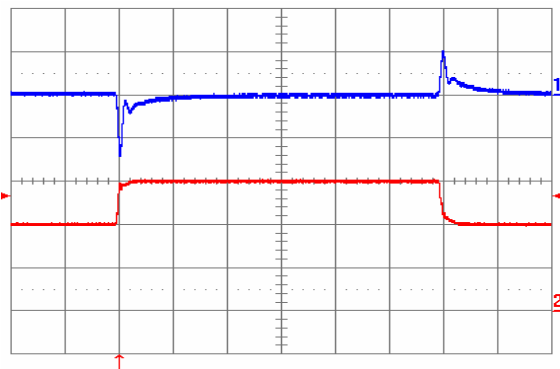


Fig. 1.0V.9: Output voltage response to load current step-change (20 A – 30 A – 20 A) at $V_{in} = 48\text{ V}$. Top trace: output voltage (100 mV/div.). Bottom trace: load current (10 A/div). Current slew rate: 1 A/ μs . $C_o = 470\text{ }\mu\text{F}$ tantalum + 1 μF ceramic. Time scale: 0.2 ms/div.

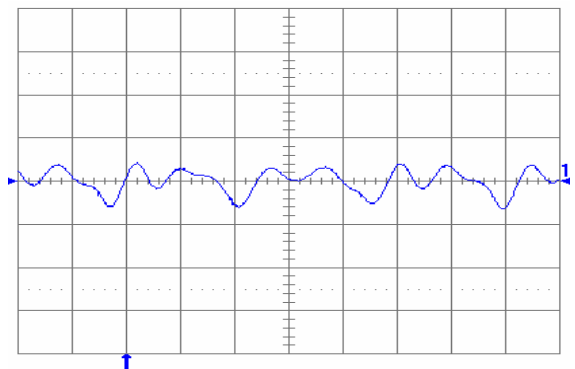


Fig. 1.0V.10: Output voltage ripple (20 mV/div.) at full rated load current into a resistive load with $C_o = 10\text{ }\mu\text{F}$ tantalum + 1 μF ceramic and $V_{in} = 48\text{ V}$. Time scale: 1 μs /div.

QM48T40 DC-DC Converter Data Sheet
36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



QM48T40010 (1.0 Volt Out)

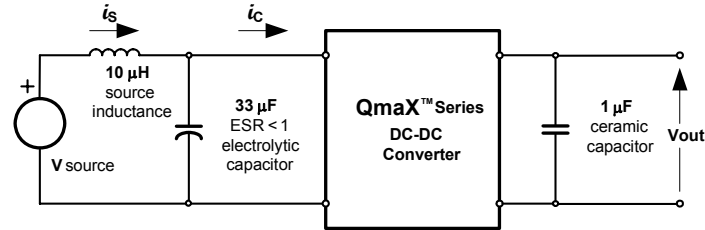


Fig. 1.0V.11: Test Setup for measuring input reflected ripple currents, i_c and i_s .

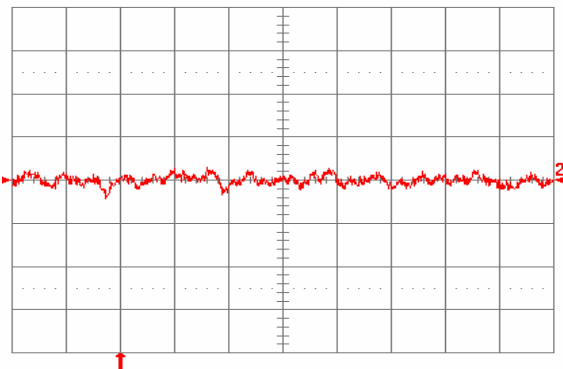


Fig. 1.0V.12: Input reflected ripple current, i_s (10 mA/div), measured through 10 μ H at the source at full rated load current and $V_{in} = 48$ V. Refer to Fig. 1.0V.11 for test setup. Time scale: 1 μ s/div.

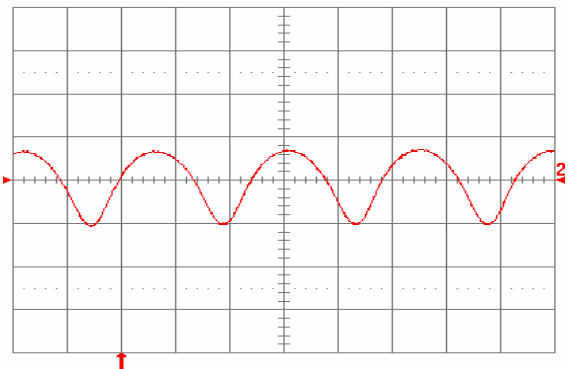


Fig. 1.0V.13: Input reflected ripple current, i_c (100 mA/div), measured at input terminals at full rated load current and $V_{in} = 48$ V. Refer to Fig. 1.0V.11 for test setup. Time scale: 1 μ s/div.

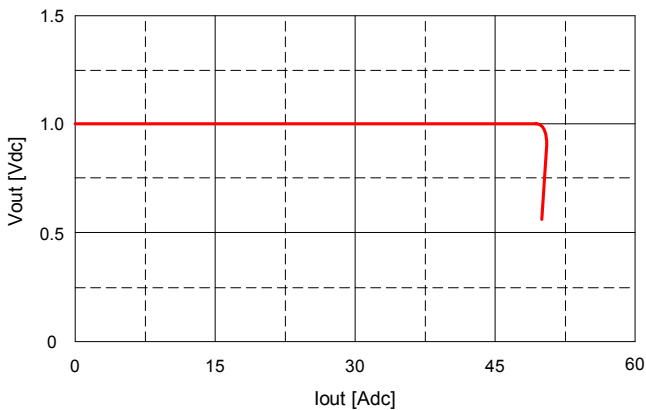


Fig. 1.0V.14: Output voltage vs. load current showing current limit point and converter shutdown point. Input voltage has almost no effect on current limit characteristic.


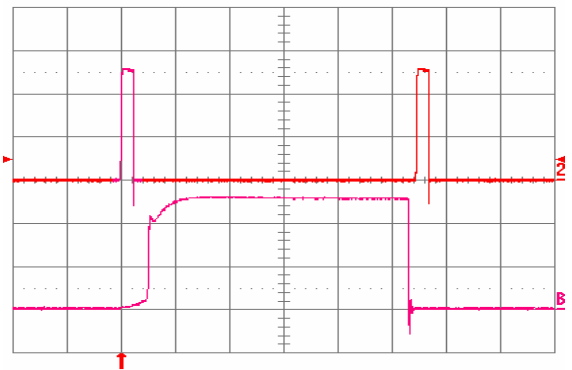


Fig. 1.0V.15: Load current (top trace, 20 A/div, 20 ms/div) into a 10 m Ω short circuit during restart, at $V_{in} = 48$ V. Bottom trace (20 A/div, 1 ms/div) is an expansion of the on-time portion of the top trace.

QM48T40 DC-DC Converter Data Sheet
36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



Physical Information

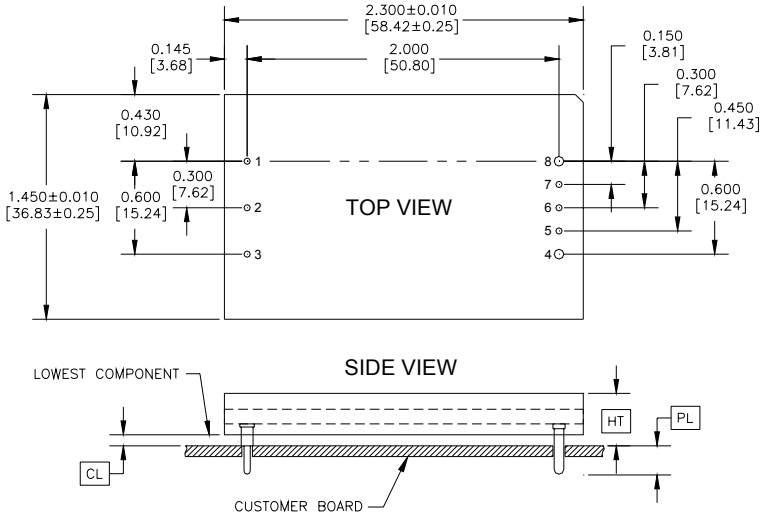

Pin Connections	
Pin #	Function
1	Vin (+)
2	ON/OFF
3	Vin (-)
4	Vout (-)
5	SENSE(-)
6	TRIM
7	SENSE(+)
8	Vout (+)

- All dimensions are in inches [mm]
- Pins 1-3 and 5-7 are \varnothing 0.040" [1.02] with \varnothing 0.078" [1.98] shoulder
- Pins 4 and 8 are \varnothing 0.062" [1.57] without shoulder
- Pin Material: Brass
- Pin Finish: Tin/Lead over Nickel or Matte Tin over Nickel for "G" version
- Converter Weight: 1.06 oz [30 g]

Height Option	HT (Maximum Height)	CL (Minimum Clearance)
	+0.000 [+0.00] -0.038 [-0.97]	+0.016 [+0.41] -0.000 [-0.00]
A	0.325 [8.26]	0.030 [0.77]
B	0.358 [9.09]	0.063 [1.60]
D	0.422 [10.72]	0.127 [3.23]

Pin Option	PL (Pin Length)
	\pm 0.005 [\pm 0.13]
A	0.188 [4.77]
B	0.145 [3.68]
C	0.110 [2.79]

QM48T40 DC-DC Converter Data Sheet

36-75 VDC Input; 1.0-3.3 VDC @ 40 A Output



Converter Part Numbering Scheme

Product Series	Input Voltage	Mounting Scheme	Rated Load Current	Output Voltage	ON/OFF Logic	Maximum Height (HT)	Pin Length (PL)	Special Features	Environmental
QM	48	T	40	033	-	N	B	A	0
Quarter-Brick Format	36-75 V	Through-hole	40 A (1.0- 3.3 V)	010 ⇒ 1.0 V 012 ⇒ 1.2 V 015 ⇒ 1.5 V 018 ⇒ 1.8 V 020 ⇒ 2.0 V 025 ⇒ 2.5 V 033 ⇒ 3.3 V	N ⇒ Negative P ⇒ Positive	A ⇒ 0.325" B ⇒ 0.358" D ⇒ 0.422"	A ⇒ 0.188" B ⇒ 0.145" C ⇒ 0.110"	0 ⇒ STD U ⇒ Special Trim ² (For 1.2 V only) T ⇒ Special Trim ² (For 1.2 V & 1.0 V only)	No Suffix ⇒ RoHS lead-solder-exemption compliant G ⇒ RoHS compliant for all six substances

1. The example above describes P/N QM48T40033-NBA0: 36-75 V input, through-hole mounting, 40 A @ 3.3 V output, negative ON/OFF logic, a maximum height of 0.358", a through the board pin length of 0.188", and Eutectic Tin/Lead solder. Please consult factory for the complete list of available options.

2. For definitions, operation, and associated trim equations for all trim options, please refer to Trim Feature for Isolated dc-dc converters Application Note.

Model numbers highlighted in yellow or shaded are not recommended for new designs.

NUCLEAR AND MEDICAL APPLICATIONS - Power-One products are not designed, intended for use in, or authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of the respective divisional president of Power-One, Inc.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.