

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Bel Fuse Inc.](#)
[QD48S018033-NS00](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

QD48S018033 DC-DC Converter Data Sheet

36-75 VDC Input; 1.8 – 3.3 VDC @ 15A Output



The **QD48S018033** dual output surface mounted DC-DC converter offers unprecedented performance in a quarter brick package by providing two independently regulated high current outputs. This is accomplished by the use of patent pending circuit and packaging techniques to achieve ultra-high efficiency, excellent thermal performance and a very low body profile.

In telecommunications applications the **QD48** converters provide up to 15 A per channel simultaneously – 30 A total – with thermal performance far exceeding existing dual quarter bricks and comparable to dual half-bricks. Low body profile and the preclusion of heat sinks minimize airflow shadowing, thus enhancing cooling for downstream devices. The use of 100% surface-mount technologies for assembly, coupled with Power-One's advanced electric and thermal circuitry and packaging, results in a product with extremely high quality and reliability.



QD48S018033 Converter



Features

- RoHS lead-free solder and lead-solder-exempted products are available
- Delivers up to 15 A simultaneously on 1.8 VDC and 3.3 VDC outputs
- Can replace two single output quarter-bricks
- Minimal cross-channel interference
- High efficiency: 87% @ 2x15 A, 87.5% @ 2x7.5 A
- Start-up into pre-biased output
- No minimum load required
- No heat sink required
- Low profile: 0.26" [6.6 mm]
- Low weight: 1 oz [28 g] typical
- Industry-standard footprint: 1.45" x 2.30"
- Meets Basic Insulation Requirements of EN60950
- Withstands 100 V input transient for 100 ms
- On-board LC input filter
- Fixed-frequency operation
- Fully protected
- Output voltage trim range: $\pm 10\%$ for both outputs
- Trim resistor via industry-standard equations
- High reliability: MTBF 2.6 million hours, calculated per Telcordia TR-332, Method I Case 1
- Positive or negative logic ON/OFF option
- UL 60950 recognized in U.S. & Canada, and DEMKO certified per IEC/EN 60950
- Meets conducted emissions requirements of FCC Class B and EN55022 Class B with external filter
- All materials meet UL94, V-0 flammability rating

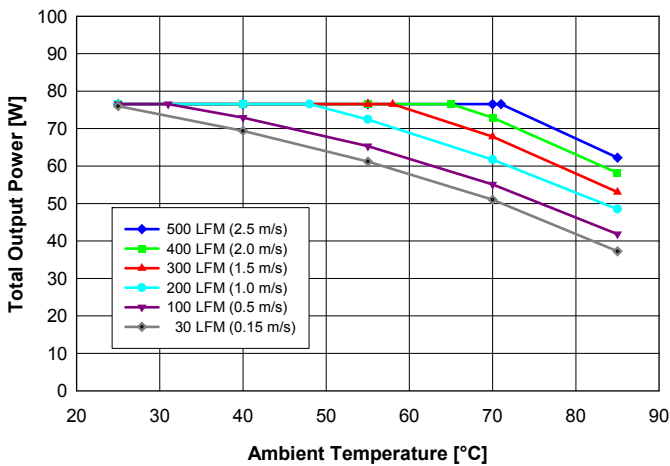


Fig. 1: Available output power vs. ambient air temperature and airflow rates for QD48S018033 converter mounted vertically with air flowing from pin 3 to pin 1, MOSFET temperature $\leq 120^\circ\text{C}$, $V_{in} = 48\text{ V}$ and balanced load on both outputs ($I_{out1} = I_{out2}$).

Applications

- Telecommunications
- Data communications
- Wireless
- Servers

QD48S018033 DC-DC Converter Data Sheet

36-75 VDC Input; 1.8 – 3.3 VDC @ 15A Output



Electrical Specifications

Conditions: $T_A=25^{\circ}\text{C}$, Airflow=300 LFM (1.5 m/s), $V_{in}=48\text{ Vdc}$, unless otherwise specified.

PARAMETER	NOTES	MIN	TYP	MAX	UNITS
ABSOLUTE MAXIMUM RATINGS					
Input Voltage	Continuous	0		80	Vdc
Operating Ambient Temperature		-40		85	$^{\circ}\text{C}$
Storage Temperature		-55		125	$^{\circ}\text{C}$
INPUT CHARACTERISTICS					
Operating Input Voltage Range		36	48	75	Vdc
Input Under Voltage Lockout	Non-latching				
Turn-on Threshold		33	34	35	Vdc
Turn-off Threshold		31	32	33	Vdc
Transient Withstand (Susceptibility)	Transient duration: 100 ms			100	V
OUTPUT CHARACTERISTICS					
External Load Capacitance:	1.8 V Plus full load (resistive)			10,000	μF
	3.3 V Plus full load (resistive)			10,000	μF
Output Current Range:	1.8 V At nominal output voltage 1.8 V	0		15	A _{dc}
	3.3 V At nominal output voltage 3.3 V	0		15	A _{dc}
Current Limit Inception:	1.8 V Non-latching	15.75	18	19.5	A _{dc}
	3.3 V Non-latching	15.75	18	19.5	A _{dc}
Peak Short-Circuit Current:	1.8 V Non-latching. Short = 10 m Ω .		20	30	A
	3.3 V Non-latching. Short = 10 m Ω .		20	30	A
RMS Short-Circuit Current:	1.8 V Non-latching			4	Arms
	3.3 V Non-latching			4	Arms
ISOLATION CHARACTERISTICS					
I/O Isolation		2000			Vdc
Isolation Capacitance			1.3		nF
Isolation Resistance		10			M Ω
FEATURE CHARACTERISTICS					
Switching Frequency			435		kHz
Output Voltage Trim Range ¹	1.8 V See section: Output Voltage Adjust/TRIM	-10		+10	%
	3.3 V Simultaneous with 1.8 V output	-10		+10	%
Output Over-Voltage Protection	1.8 V Non-latching	2.1	2.25	2.34	V
	3.3 V Non-latching	3.85	4.125	4.25	V
Over-Temperature Shutdown (PCB)	Non-latching		120		$^{\circ}\text{C}$
Auto-Restart Period	Applies to all protection features		100		ms
Turn-On Time	3.3 V 1.8 V tracks 3.3 V		3		ms
ON/OFF Control (Positive Logic)					
Converter Off		-20		0.8	Vdc
Converter On		2.4		20	Vdc
ON/OFF Control (Negative Logic)					
Converter Off		2.4		20	Vdc
Converter On		-20		0.8	Vdc

Additional Notes:

1. V_{out1} and V_{out2} can be simultaneously increased or decreased up to 10% via the Trim function. When trimming up, in order not to exceed the converter's maximum allowable output power capability equal to the product of the nominal output voltage and the allowable output current for the given conditions, the designer must, if necessary, decrease the maximum current (originally obtained from the derating curves) by the same percentage to ensure the converter's actual output power remains at or below the maximum allowable output power.

QD48S018033 DC-DC Converter Data Sheet

36-75 VDC Input; 1.8 – 3.3 VDC @ 15A Output



Electrical Specifications (continued)

Conditions: $T_A=25^\circ\text{C}$, Airflow=300 LFM (1.5 m/s), $V_{in}=48\text{ Vdc}$, unless otherwise specified.

PARAMETER	NOTES	MIN	TYP	MAX	UNITS
INPUT CHARACTERISTICS					
Maximum Input Current	1.8Vdc @ 15 Adc, 3.3 Vdc @ 15 Adc, $V_{in} = 36\text{ V}$			2.5	Adc
Input Stand-by Current	$V_{in} = 48\text{ V}$, converter disabled		2.6		mAdc
Input No Load Current (0 load on both outputs)	$V_{in} = 48\text{ V}$, converter enabled		58		mAdc
Input Reflected-Ripple Current	See Figure 37 - 25MHz bandwidth		6		$\text{mA}_{\text{PK-PK}}$
Input Voltage Ripple Rejection	120Hz		TBD		dB
OUTPUT CHARACTERISTICS					
Output Voltage Set Point (no load)	1.8 V -40°C to 85°C	1.782	1.800	1.818	Vdc
	3.3 V -40°C to 85°C	3.267	3.300	3.333	Vdc
Output Regulation: Over Line	1.8 V		± 2		mV
	3.3 V		± 2		mV
Over Load ²	1.8 V		-10		mV
	3.3 V		-10		mV
Cross Regulation ³	1.8 V For lout2 (3.3 V) change from 0 to 15 A		-5		mV
	3.3 V For lout1 (1.8 V) change from 0 to 15 A		-5		mV
Output Voltage Range	1.8 V Over line, load and cross regulation	1.764		1.836	Vdc
	3.3 V Over line, load and cross regulation	3.234		3.366	Vdc
Output Ripple and Noise - 25MHz BW	1.8 V Full load + 1 μF ceramic		20	30	$\text{mV}_{\text{PK-PK}}$
	3.3 V Full load + 1 μF ceramic		25	40	$\text{mV}_{\text{PK-PK}}$
DYNAMIC RESPONSE					
Load Change: 50% to 75% to 50%	$\Delta I_{out} = 25\%$ of I_{outMax}				
$di/dt = 0.1\text{ A}/\mu\text{S}$	1.8 V $C_o = 10\ \mu\text{F}$ tant. + 1 μF ceramic (Fig.24)		40		mV
	3.3 V $C_o = 10\ \mu\text{F}$ tant. + 1 μF ceramic (Fig.25)		40		mV
Setting Time to 1%	1.8 V		100		μs
	3.3 V		100		μs
$di/dt = 5\text{ A}/\mu\text{S}$	1.8 V $C_o = 300\ \mu\text{F}$ tant. + 1 μF ceramic (Fig.26)		90		mV
	3.3 V $C_o = 300\ \mu\text{F}$ tant. + 1 μF ceramic (Fig.27)		90		mV
Setting Time to 1%	1.8 V		60		μs
	3.3 V		60		μs
EFFICIENCY					
1.8V 100% Load, 3.3V 100% Load			87		%
1.8V 50% Load, 3.3V 50% Load			87.5		%

Additional Notes:


- Load regulation is affected with resistance of the output pins (approximately 0.3 m Ω) since there is no remote sense.
- Cross regulation is affected with resistance of the RETURN pin (approximately 0.3 m Ω) since there is no remote sense.

QD48S018033 DC-DC Converter Data Sheet

36-75 VDC Input; 1.8 – 3.3 VDC @ 15A Output



Physical Information

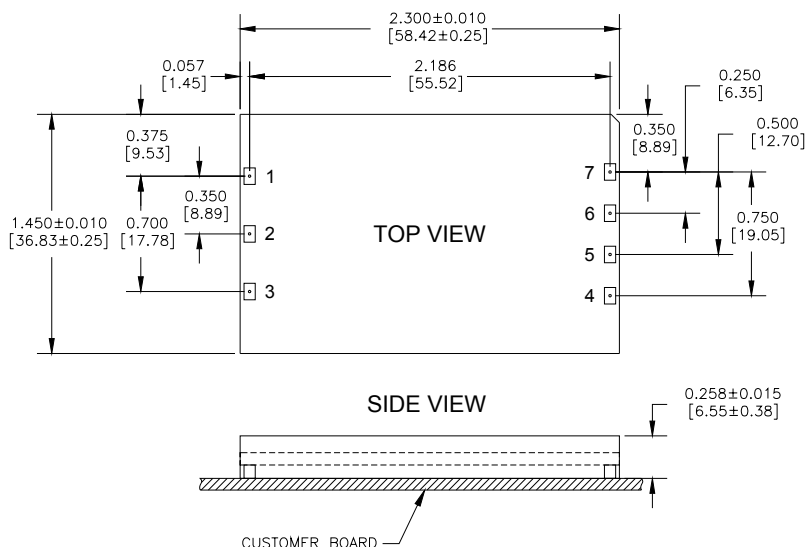

Pin Connections	
Pin #	Function
1	V _{in} (+)
2	ON/OFF
3	V _{in} (-)
4	V _{OUT1} (+)
5	RTN [Vo1(-) +Vo2(-)]
6	TRIM
7	V _{OUT2} (+)

- All dimensions are in inches [mm]
- Connector material: Copper
- Connector Finish: Gold over Nickel
- Converter Weight: 1 oz. [28 g] typical
- Recommended Surface-Mount Pads:
 Min. 0.080" x 0.112" [2.03 x 2.84]
 Max. 0.092" x 0.124" [2.34 x 3.15]

Converter Part Numbering Scheme

Product Series	Input Voltage	Mounting Scheme	Output Voltage 1 (V _{OUT1})	Output Voltage 2 (V _{OUT2})	ON/OFF Logic	Maximum Height	Pin Length	Special Features
QD	48	S	018	033	-	N	S	0
Dual Quarter-Brick Format	36-75 V	Surface Mount	018 ⇒ 1.8 V	033 ⇒ 3.3 V	N ⇒ Negative P ⇒ Positive	S ⇒ 0.273"	0 ⇒ 0.00"	0 ⇒ STD
			Note: Always specify V _{OUT2} as the higher of the two output voltages.					

The example above describes P/N QD48S018033-NS00: 36-75 V input, dual output, surface mounting, 1.8 V and 3.3 V outputs @ 15 A each, negative ON/OFF logic. Please consult factory regarding availability of a specific version.

RoHS Ordering Information:

- No RoHS suffix character is required for lead-solder-exemption compliance.
- For RoHS compliance to all six substances, add the letter "G" as the last letter of the part number.

QD48S018033 DC-DC Converter Data Sheet
36-75 VDC Input; 1.8 – 3.3 VDC @ 15A Output



Operation

Input and Output Impedance

These power converters have been designed to be stable with no external capacitors when used in low inductance input and output circuits.

However, in many applications, the inductance associated with the distribution from the power source to the input of the converter can affect the stability of the converter. The addition of a 33 μ F electrolytic capacitor with an ESR < 1 Ω across the input helps ensure stability of the converter. In many applications, the user has to use decoupling capacitance at the load. The converter will exhibit stable operation with external load capacitance up to 10,000 μ F on both outputs.

ON/OFF (Pin 2)

The ON/OFF pin is used to turn the power converter on or off remotely via a system signal. There are two remote control options available, positive logic and negative logic and both are referenced to Vin(-). Typical connections are shown in Fig. 2.

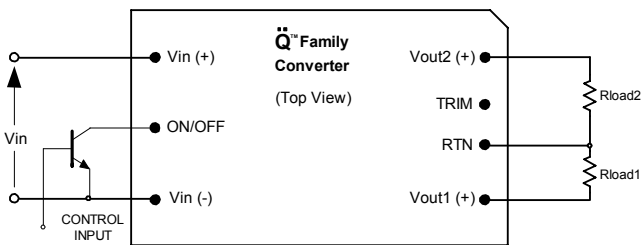


Fig. 2: Circuit configuration for ON/OFF function.

The positive logic version turns on when the ON/OFF pin is at logic high and turns off when at logic low. The converter is on when the ON/OFF pin is left open.

The negative logic version turns on when the pin is at logic low and turns off when the pin is at logic high. The ON/OFF pin can be hard wired directly to Vin(-) to enable automatic power up of the converter without the need of an external control signal.

ON/OFF pin is internally pulled-up to 5 V through a resistor. A mechanical switch, open collector transistor, or FET can be used to drive the input of the ON/OFF pin. The device must be capable of sinking up to 0.2 mA at a low level voltage of ≤ 0.8 V. An external voltage source of ± 20 V max.

may be connected directly to the ON/OFF input, in which case it should be capable of sourcing or sinking up to 1 mA depending on the signal polarity. See the Start-up Information section for system timing waveforms associated with use of the ON/OFF pin.

Output Voltage Adjust /TRIM (Pin 6)

The converter's output voltages can be adjusted simultaneously up 10% or down 10% relative to the rated output voltages by the addition of an externally connected resistor. For output voltage 3.3 V, trim up to 10% is guaranteed only at Vin ≥ 40 V, and it is marginal (8% to 10%) at Vin = 36 V.

The TRIM pin should be left open if trimming is not being used. To minimize noise pickup, a 0.1 μ F capacitor is connected internally between the TRIM and RETURN pins.

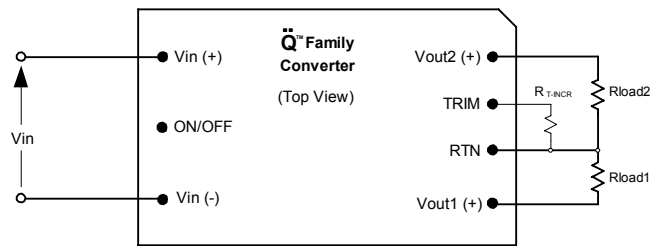


Fig. 3: Configuration for increasing output voltage.

To increase the output voltage (refer to Fig. 3), a trim resistor, R_{T-INCR}, should be connected between the TRIM (Pin 6) and RETURN (Pin 5), with a value from the table below.

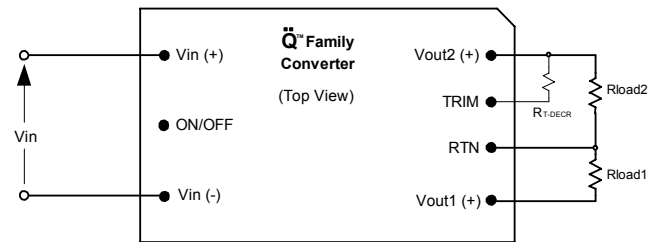


Fig. 4: Configuration for decreasing output voltage.

To decrease the output voltage, a trim resistor R_{T-DECR}, (Fig. 4) should be connected between the TRIM (Pin 6) and Vout2(+) pin (Pin 7), with a value from the table below, where:

Δ = percentage of increase or decrease Vout(NOM).

Note 1: Both outputs are trimmed up or down simultaneously.

QD48S018033 DC-DC Converter Data Sheet 36-75 VDC Input; 1.8 – 3.3 VDC @ 15A Output



Trim Resistor (Vout Increase)	
Δ [%]	R _{T-INC} [k Ω]
1	54.9
2	24.9
3	14.3
4	9.31
5	6.34
6	4.32
7	2.80
8	1.69
9	0.825
10	0

Trim Resistor (Vout Decrease)	
Δ [%]	R _{T-DEC} [k Ω]
-1	68.1
-2	30.1
-3	17.8
-4	11.5
-5	7.68
-6	5.36
-7	3.48
-8	2.10
-9	1.05
-10	0

Note 2: The above trim resistor values match those typically used in industry-standard dual quarter bricks.

Protection Features

Input Undervoltage Lockout

Input undervoltage lockout is standard with this converter. The converter will shut down when the input voltage drops below a pre-determined voltage.

The input voltage must be at least 35 V for the converter to turn on. Once the converter has been turned on, it will shut off when the input voltage drops below 31 V. This feature is beneficial in preventing deep discharging of batteries used in telecom applications.

Output Overcurrent Protection (OCP)

The converter is protected against overcurrent or short circuit conditions on both outputs. Upon sensing an overcurrent condition, the converter will switch to constant current operation and thereby begin to reduce output voltages. If, due to current limit, the output voltage Vout2 (3.3 V) drops below Vout1 (1.8 V), Vout1 will follow Vout2 with not more than 0.6V difference. Drop on Vout1 output due to current limit will not affect voltage on Vout2. For further load increase, if either Vout1 or Vout2 drops below 1 Vdc, the converter will shut down (Figs. 30 and 31).

Once the converter has shut down, it will attempt to restart nominally every 100 ms with a 2% duty cycle (Figs. 32 and 33). The attempted restart will continue indefinitely until the overload or short circuit conditions are removed or the output voltage rises above 1 Vdc.

Output Overvoltage Protection (OVP)

The converter will shut down if the output voltage across either Vout1(+) (Pin 4) or Vout2(+) (Pin 7) and RETURN (Pin 5) exceeds the threshold of the OVP circuitry. The OVP protection is separate for Vout1 and Vout2 with their own reference independent of the output voltage regulation loops. Once the converter has shut down, it will attempt to restart every 100 ms until the OVP condition is removed.

Overtemperature Protection (OTP)

The converter will shut down under an overtemperature condition to protect itself from overheating caused by operation outside the thermal derating curves, or operation in abnormal conditions such as system fan failure. After the converter has cooled to a safe operating temperature, it will automatically restart.

Safety Requirements

The converters meet North American and International safety regulatory requirements per UL60950 and EN60950. Basic Insulation is provided between input and output.

To comply with safety agencies requirements, an input line fuse must be used external to the converter. A 4-A fuse is recommended for use with this product.

Electromagnetic Compatibility (EMC)

EMC requirements must be met at the end-product system level, as no specific standards dedicated to EMC characteristics of board mounted component dc-dc converters exist. However, Power-One tests its converters to several system level standards, primary of which is the more stringent EN55022, *Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement*.

With the addition of a simple external filter (see application notes), all versions of the QD48S converters pass the requirements of Class B conducted emissions per EN55022 and FCC, and meet at a minimum, Class A radiated emissions per EN 55022 and Class B per FCC Title 47CFR, Part 15-J. Please contact Power-One Applications Engineering for details of this testing.

QD48S018033 DC-DC Converter Data Sheet 36-75 VDC Input; 1.8 – 3.3 VDC @ 15A Output



Input Transient Withstand

This family of converters withstands 100V input transient for 100ms.

Characterization

General Information

The converter has been characterized for many operational aspects, to include thermal derating (maximum load current as a function of ambient temperature and airflow) for vertical and horizontal mounting, efficiency, start-up and shutdown parameters, output ripple and noise, transient response to load step-change, overload and short circuit.

The following pages contain specific plots or waveforms associated with the converter. Additional comments for specific data are provided below.

Test Conditions

All data presented were taken with the converter soldered to a test board, specifically a 0.060" thick printed wiring board (PWB) with four layers. The top and bottom layers were not metalized. The two inner layers, comprising two-ounce copper, were used to provide traces for connectivity to the converter.

The lack of metalization on the outer layers as well as the limited thermal connection ensured that heat transfer from the converter to the PWB was minimized. This provides a worst-case but consistent scenario for thermal derating purposes.

All measurements requiring airflow were made in Power-One's vertical and horizontal wind tunnel facilities using infrared (IR) thermography and thermocouples for thermometry.

Ensuring that the components on the converter do not exceed their ratings is important to maintaining high reliability. If one anticipates operating the converter at or close to the maximum loads specified in the derating curves, it is prudent to check actual operating temperatures in the application. Thermographic imaging is preferable; if this capability is not available, then thermocouples may be used. Power-One recommends the use of AWG #40 gauge thermocouples to ensure measurement accuracy. Careful routing of the thermocouple leads will further minimize measurement error. Refer to Figure 38 for optimum measuring thermocouple location.

Thermal Derating

Available output power and load current vs. ambient temperature and airflow rates are given in Figs. 8-15. Ambient temperature was varied between 25°C and 85°C, with airflow rates from 30 to 500 LFM (0.15 to 2.5 m/s), and vertical and horizontal converter mounting.

For each set of conditions, the maximum load current was defined as the lowest of:

- (i) The output current at which either any FET junction temperature did not exceed a maximum specified temperature (120°C) as indicated by the thermographic image, or
- (ii) The nominal rating of the converter (15 A on either output)

During normal operation, derating curves with maximum FET temperature less than or equal to 120°C should not be exceeded. Temperature on the PCB at the thermocouple location shown in Fig. 38 should not exceed 118°C in order to operate inside the derating curves.

Efficiency

Efficiency vs. load current plots are shown in Figs. 16-21 for ambient temperature of 25°C, airflow rate of 300 LFM (1.5 m/s), both vertical and horizontal orientations, and input voltages of 36 V, 48 V and 72 V, for different combinations of the loads on outputs Vout1 and Vout2.

Start-up

Output voltage waveforms during the turn-on transient using the ON/OFF pin, are shown without and with full rated load currents (resistive load) in Figs. 22 and 23, respectively.

Ripple and Noise

Figure 34 shows the output voltage ripple waveform, measured at full rated load current on both outputs with a 1 µF ceramic capacitor across both outputs. Note that all output voltage waveforms are measured across a 1 µF ceramic capacitor.

The input reflected ripple current waveforms are obtained using the test setup shown in Fig. 35. The corresponding waveforms are shown in Figs. 36 and 37.

QD48S018033 DC-DC Converter Data Sheet 36-75 VDC Input; 1.8 – 3.3 VDC @ 15A Output



Start-up Information (using negative ON/OFF)

Scenario #1: Initial Start-up From Bulk Supply

ON/OFF function enabled, converter started via application of V_{IN} . See Figure 5.

Time	Comments
t_0	ON/OFF pin is ON; system front end power is toggled on, V_{IN} to converter begins to rise.
t_1	V_{IN} crosses Under-Voltage Lockout protection circuit threshold; converter enabled.
t_2	Converter begins to respond to turn-on command (converter turn-on delay).
t_3	Output voltage V_{OUT1} reaches 100% of nominal value.
t_4	Output voltage V_{OUT2} reaches 100% of nominal value.

For this example, the total converter start-up time ($t_4 - t_1$) is typically 3 ms.

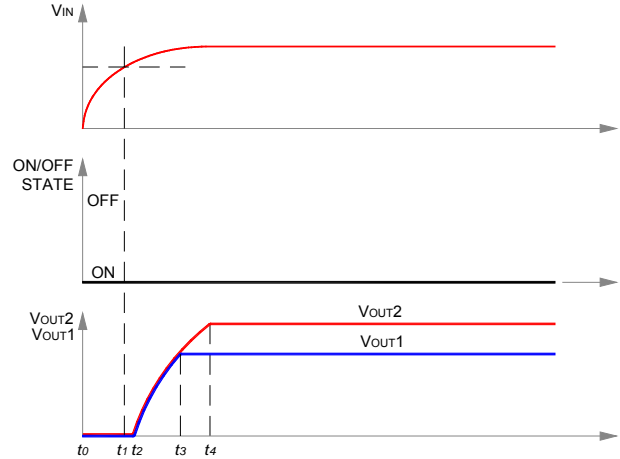


Fig. 5: Start-up scenario #1.

Scenario #2: Initial Start-up Using ON/OFF Pin

With V_{IN} previously powered, converter started via ON/OFF pin. See Figure 6.

Time	Comments
t_0	V_{INPUT} at nominal value.
t_1	Arbitrary time when ON/OFF pin is enabled (converter enabled).
t_2	End of converter turn-on delay.
t_3	Output voltage V_{OUT1} reaches 100% of nominal value.
t_4	Output voltage V_{OUT2} reaches 100% of nominal value.

For this example, the total converter start-up time ($t_4 - t_1$) is typically 3 ms.

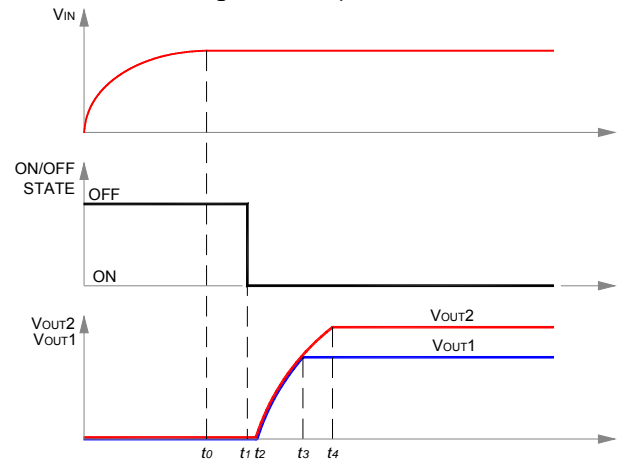


Fig. 6: Start-up scenario #2.

Scenario #3: Turn-off and Restart Using ON/OFF Pin

With V_{IN} previously powered, converter is disabled and then enabled via ON/OFF pin. See Figure 7.

Time	Comments
t_0	V_{IN} and V_{OUT} are at nominal values; ON/OFF pin ON.
t_1	ON/OFF pin arbitrarily disabled; converter outputs fall to zero; turn-on inhibit delay period (100 ms typical) is initiated, and ON/OFF pin action is internally inhibited.
t_2	ON/OFF pin is externally re-enabled. If $(t_2 - t_1) \leq 100$ ms, external action of ON/OFF pin is locked out by start-up inhibit timer. If $(t_2 - t_1) > 100$ ms, ON/OFF pin action is internally enabled.
t_3	Turn-on inhibit delay period ends. If ON/OFF pin is ON, converter begins turn-on; if off, converter awaits ON/OFF pin ON signal; see Figure 6.
t_4	End of converter turn-on delay.
t_5	Output voltage V_{OUT1} reaches 100% of nominal value.
t_6	Output voltage V_{OUT2} reaches 100% of nominal value.

For the condition, $(t_2 - t_1) \leq 100$ ms, the total converter start-up time ($t_6 - t_2$) is typically 103 ms. For $(t_2 - t_1) > 100$ ms, start-up time will be typically 3 ms after release of ON/OFF pin.

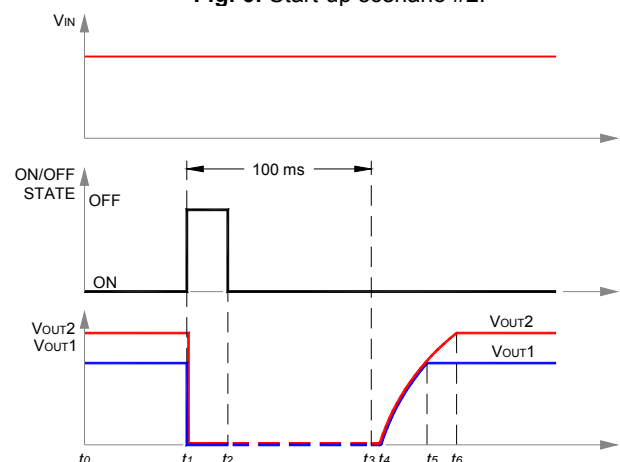


Fig. 7: Start-up scenario #3.

QD48S018033 DC-DC Converter Data Sheet
36-75 VDC Input; 1.8 – 3.3 VDC @ 15A Output

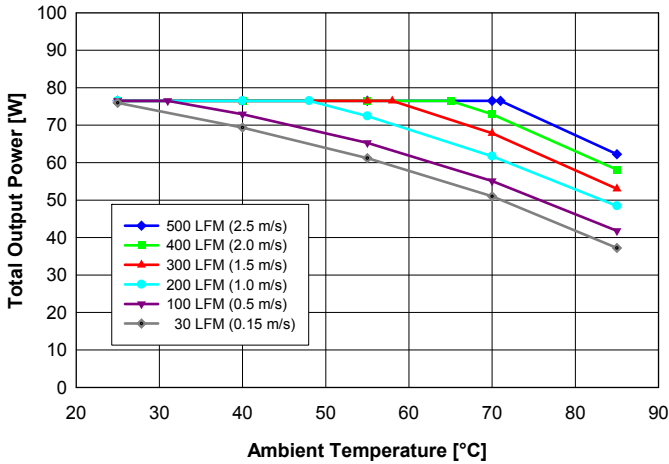


Fig. 8: Available output power for balanced load current ($I_{out1} = I_{out2}$) vs. ambient air temperature and airflow rates for converter mounted vertically with $V_{in} = 48\text{ V}$, air flowing from pin 3 to pin 1 and maximum FET temperature $\leq 120^\circ\text{C}$.

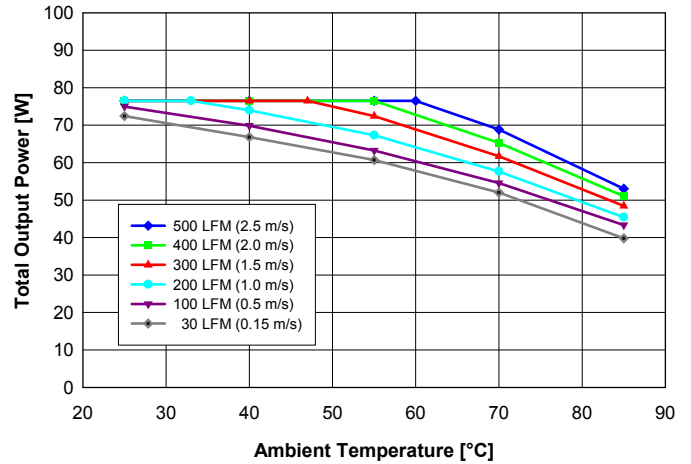


Fig. 9: Available output power for balanced load current ($I_{out1} = I_{out2}$) vs. ambient air temperature and airflow rates for converter mounted horizontally with $V_{in} = 48\text{ V}$, air flowing from pin 3 to pin 4 and maximum FET temperature $\leq 120^\circ\text{C}$.

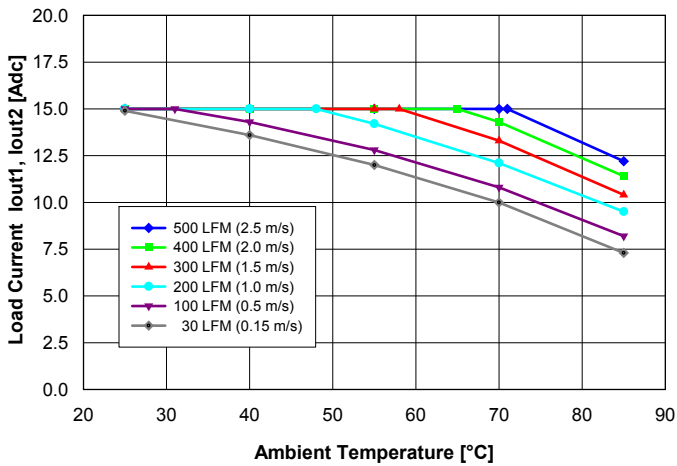


Fig. 10: Available balanced load current ($I_{out1} = I_{out2}$) vs. ambient air temperature and airflow rates for converter mounted vertically with $V_{in} = 48\text{ V}$, air flowing from pin 3 to pin 1 and maximum FET temperature $\leq 120^\circ\text{C}$.

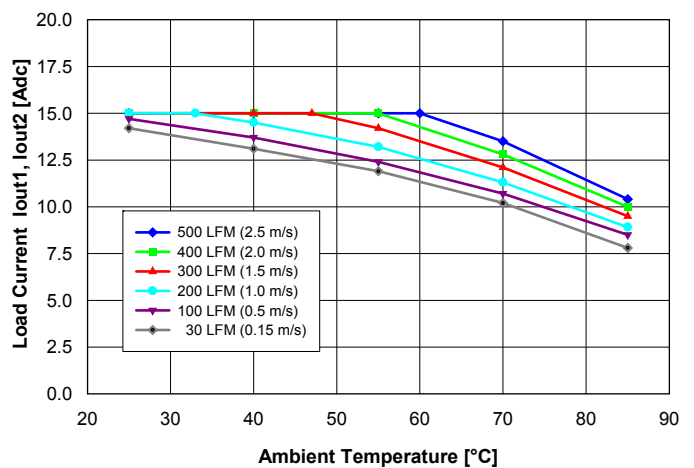


Fig. 11: Available balanced load current ($I_{out1} = I_{out2}$) vs. ambient temperature and airflow rates for converter mounted horizontally with $V_{in} = 48\text{ V}$, air flowing from pin 3 to pin 4 and maximum FET temperature $\leq 120^\circ\text{C}$.

QD48S018033 DC-DC Converter Data Sheet
36-75 VDC Input; 1.8 – 3.3 VDC @ 15A Output

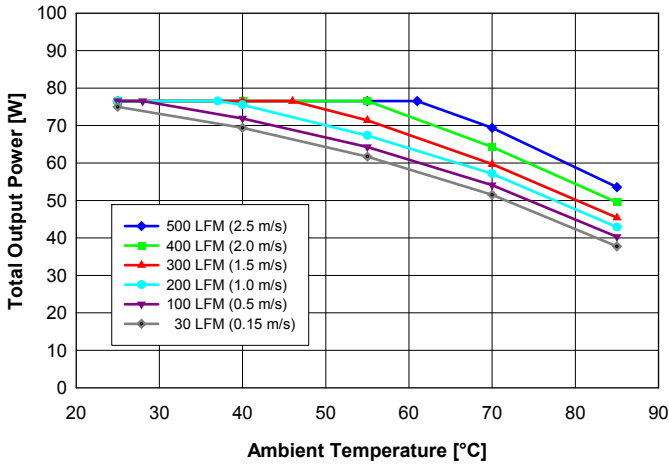


Fig. 12: Available output power for balanced load current (Iout1 = Iout2) vs. ambient air temperature and airflow rates for converter mounted vertically with Vin = 48 V, air flowing from pin 3 to pin 4 and maximum FET temperature ≤ 120°C.

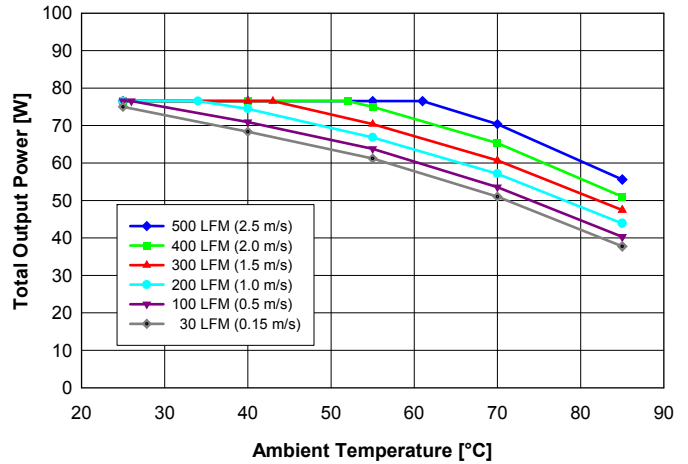


Fig. 13: Available output power for balanced load current (Iout1 = Iout2) vs. ambient air temperature and airflow rates for converter mounted vertically with Vin = 48 V, air flowing from pin 4 to pin 3 and maximum FET temperature ≤ 120°C.

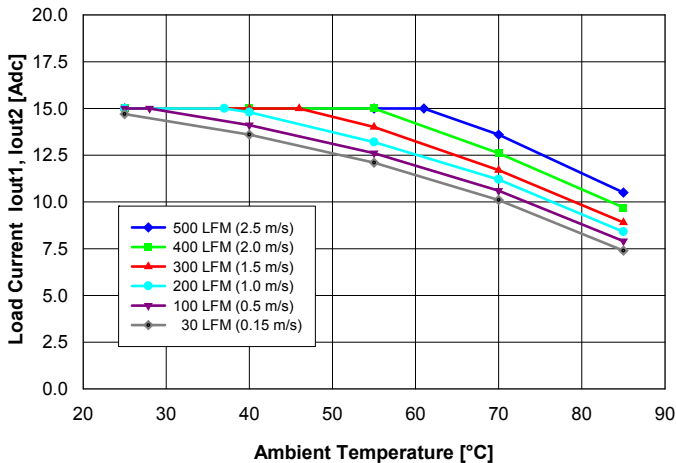


Fig. 14: Available balanced load current (Iout1 = Iout2) vs. ambient air temperature and airflow rates for converter mounted vertically with Vin = 48 V, air flowing from pin 3 to pin 4 and maximum FET temperature ≤ 120°C.

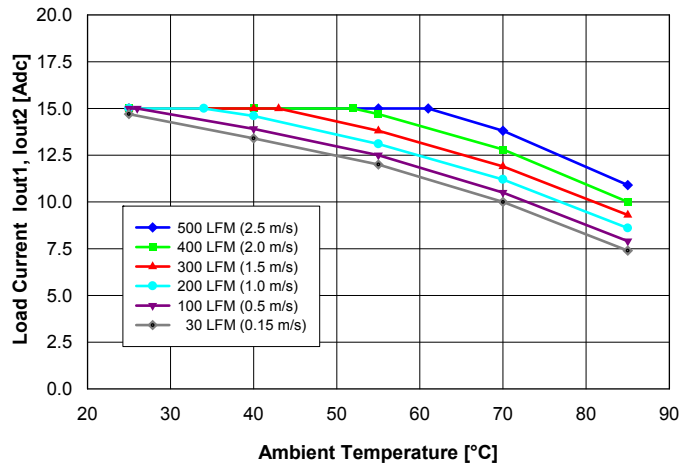


Fig. 15: Available balanced load current (Iout1 = Iout2) vs. ambient air temperature and airflow rates for converter mounted vertically with Vin = 48 V, air flowing from pin 4 to pin 3 and maximum FET temperature ≤ 120°C.

QD48S018033 DC-DC Converter Data Sheet
36-75 VDC Input; 1.8 – 3.3 VDC @ 15A Output

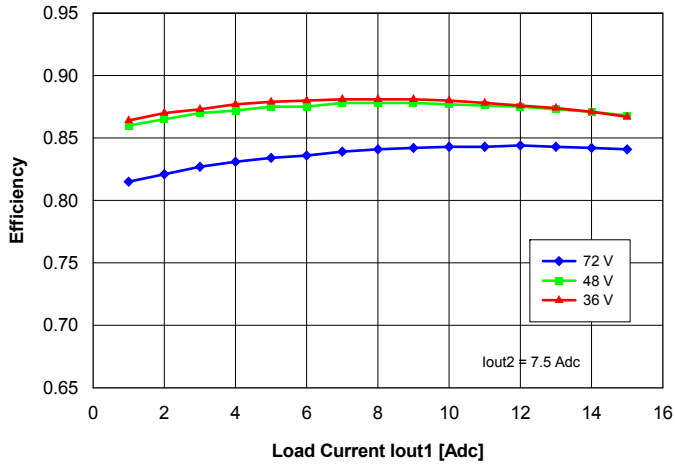


Fig. 16: Efficiency vs. load current Iout1 and input voltage for converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s), for Iout2 = 7.5 A and Ta = 25°C.

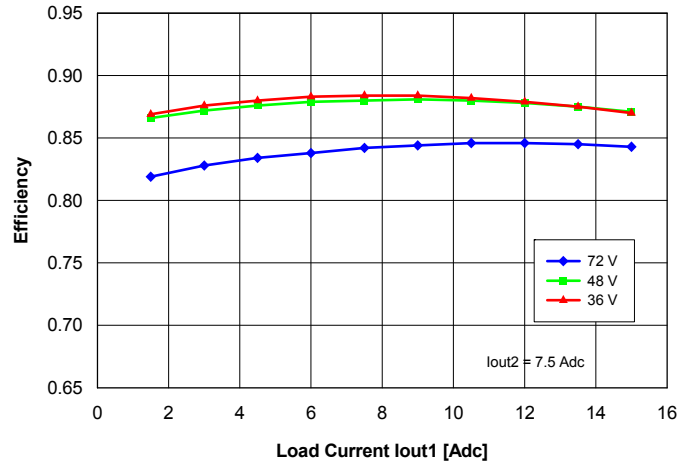


Fig. 17: Efficiency vs. load current Iout1 and input voltage for converter mounted horizontally with air flowing from pin 3 to pin 4 at a rate of 300 LFM (1.5 m/s), for Iout2 = 7.5 A and Ta = 25°C.

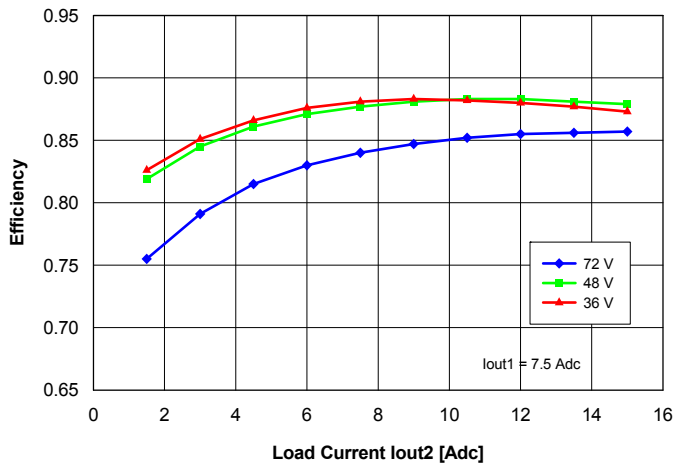


Fig. 18: Efficiency vs. load current Iout2 and input voltage for converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s), for Iout1 = 7.5 A and Ta = 25°C.

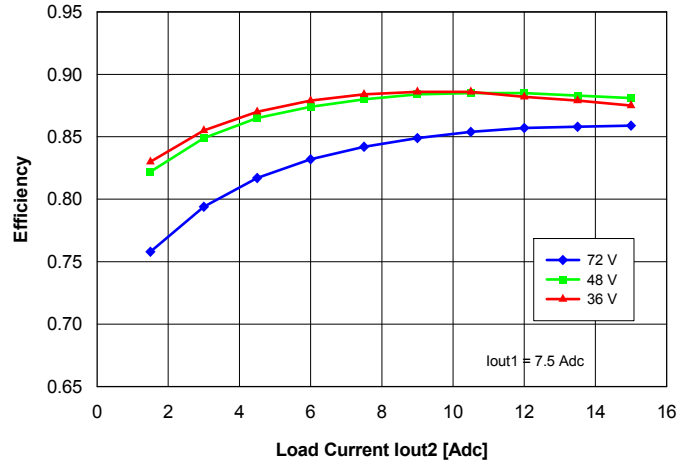


Fig. 19: Efficiency vs. load current Iout2 and input voltage for converter mounted horizontally with air flowing from pin 3 to pin 4 at a rate of 300 LFM (1.5 m/s), for Iout1 = 7.5 A and Ta = 25°C.

QD48S018033 DC-DC Converter Data Sheet
36-75 VDC Input; 1.8 – 3.3 VDC @ 15A Output

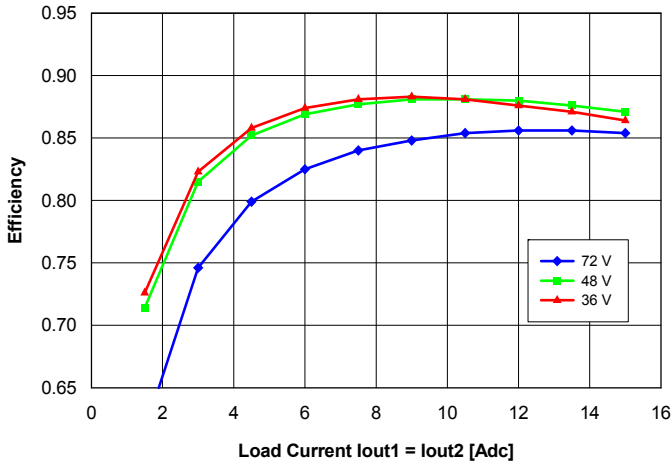


Fig. 20: Efficiency vs. balanced load current ($I_{out1} = I_{out2}$) and input voltage for converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and $T_a = 25^\circ\text{C}$.

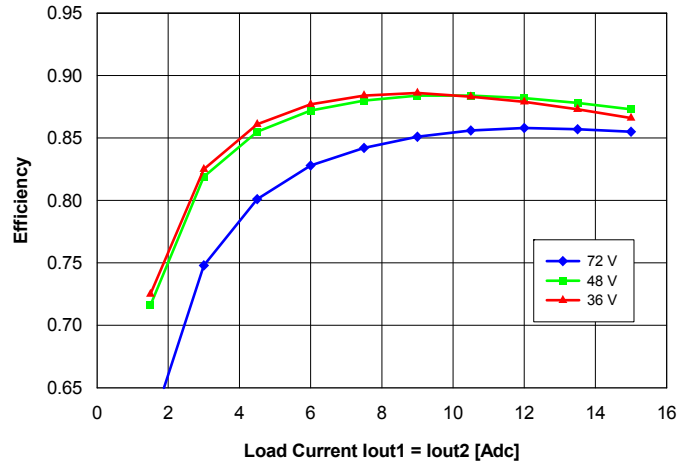


Fig. 21: Efficiency vs. balanced load current ($I_{out1} = I_{out2}$) and input voltage for converter mounted horizontally with air flowing from pin 3 to pin 4 at a rate of 300 LFM (1.5 m/s) and $T_a = 25^\circ\text{C}$.

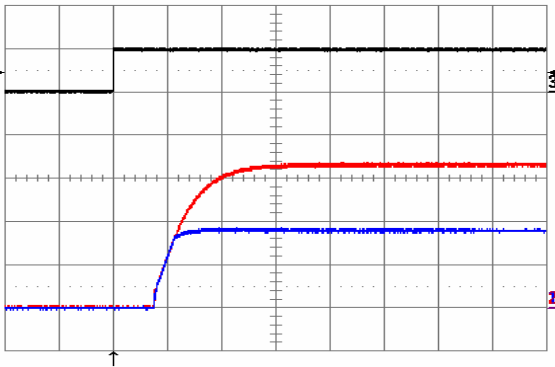


Fig. 22: Turn-on transient waveforms at no load current and $V_{in} = 48\text{ V}$, triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom traces: V_{out1} (blue, 1 V/div.), V_{out2} (red, 1 V/div.). Time scale: 1 ms/div.

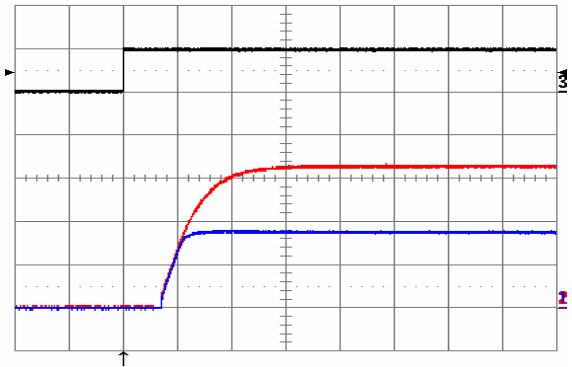


Fig. 23: Turn-on transient waveforms at full rated load current (resistive) and $V_{in} = 48\text{ V}$, triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom traces: V_{out1} (blue, 1 V/div.), V_{out2} (red, 1 V/div.). Time scale: 1 ms/div.

QD48S018033 DC-DC Converter Data Sheet
36-75 VDC Input; 1.8 – 3.3 VDC @ 15A Output

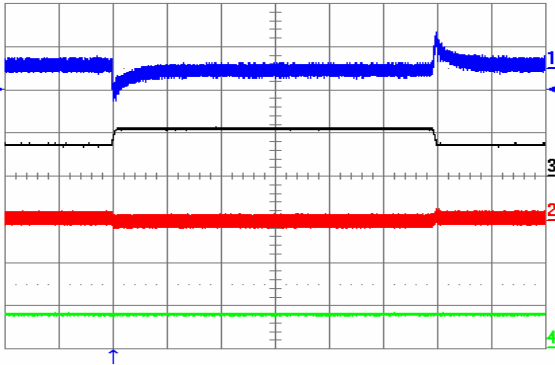


Fig. 24: Output voltage response to lout1 load current step-change of 3.75 A (50%-75%-50%) at lout2 = 7.5 A and Vin = 48 V. Ch1 = Vout1 (50 mV/div), Ch2 = Vout2 (50 mV/div), Ch3 = lout1 (10 A/div.), Ch4 = lout2 (10 A/div.). Current slew rate: 0.1 A/ μ s, Co = 10 μ F tantalum + 1 μ F ceramic. Time scale: 0.5 ms/div.

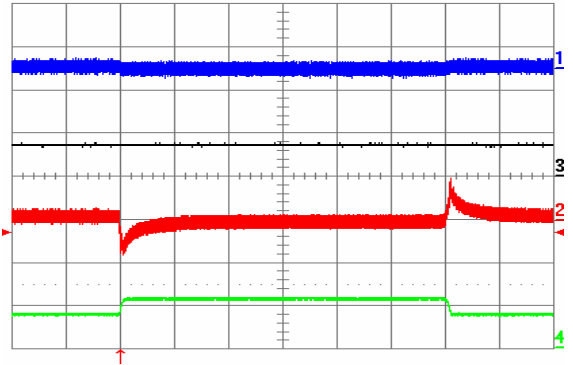


Fig. 25: Output voltage response to lout2 load current step-change of 3.75 A (50%-75%-50%) at lout1 = 7.5 A and Vin = 48 V. Ch1 = Vout1 (50 mV/div), Ch2 = Vout2 (50 mV/div), Ch3 = lout1 (10 A/div.), Ch4 = lout2 (10 A/div.). Current slew rate: 0.1 A/ μ s, Co = 10 μ F tantalum + 1 μ F ceramic. Time scale: 0.5 ms/div.

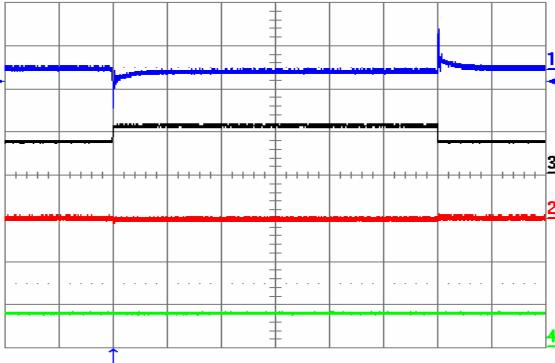


Fig. 26: Output voltage response to lout1 load current step-change of 3.75 A (50%-75%-50%) at lout2 = 7.5 A and Vin = 48 V. Ch1 = Vout1 (100 mV/div), Ch2 = Vout2 (100 mV/div), Ch3 = lout1 (10 A/div.), Ch4 = lout2 (10 A/div.). Current slew rate: 5 A/ μ s, Co = 300 μ F tantalum + 1 μ F ceramic. Time scale: 0.5 ms/div.

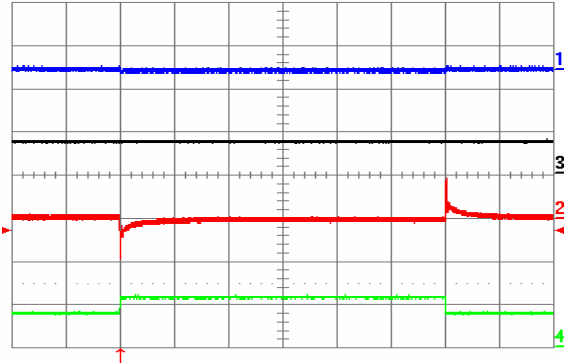


Fig. 27: Output voltage response to lout2 load current step-change of 3.75 A (50%-75%-50%) at lout1 = 7.5 A and Vin = 48 V. Ch1 = Vout1 (100 mV/div), Ch2 = Vout2 (100 mV/div), Ch3 = lout1 (10 A/div.), Ch4 = lout2 (10 A/div.). Current slew rate: 5 A/ μ s, Co = 300 μ F tantalum + 1 μ F ceramic. Time scale: 0.5 ms/div.

QD48S018033 DC-DC Converter Data Sheet
36-75 VDC Input; 1.8 – 3.3 VDC @ 15A Output

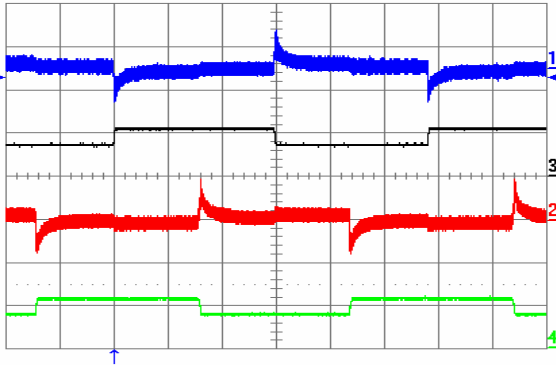


Fig. 28: Output voltage response to both Iout1 and Iout2 (out of phase) load current step-change of 3.75 A (50%-75%-50%) at Vin = 48 V. Ch1 = Vout1 (50 mV/div), Ch2 = Vout2 (50 mV/div), Ch3 = Iout1 (10 A/div.), Ch4 = Iout2 (10 A/div.). Current slew rate: 0.1 A/μs, Co = 10 μF tantalum + 1 μF ceramic. Time scale: 1 ms/div.

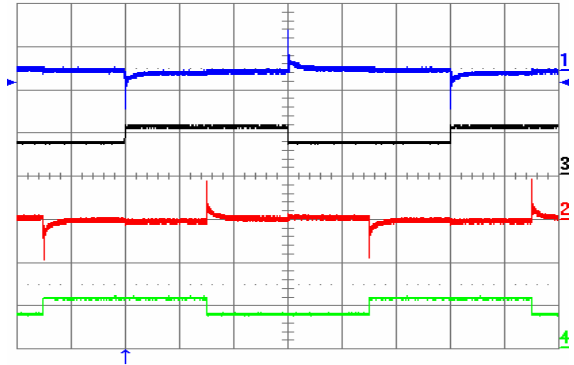


Fig. 29: Output voltage response to both Iout1 and Iout2 (out of phase) load current step-change of 3.75 A (50%-75%-50%) at Vin = 48 V. Ch1 = Vout1 (100 mV/div), Ch2 = Vout2 (100 mV/div), Ch3 = Iout1 (10 A/div.), Ch4 = Iout2 (10 A/div.). Current slew rate: 5 A/μs, Co = 300 μF tantalum + 1 μF ceramic. Time scale: 1 ms/div.

Note: The only cross-talk during transient is due to the common RETURN pin for both outputs.

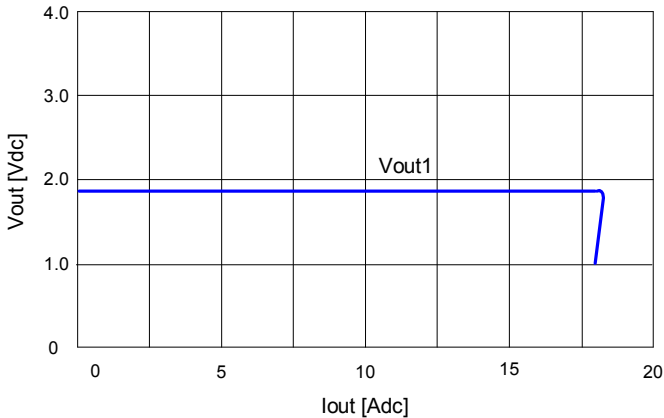


Fig. 30: Output voltage Vout1 vs. load current Iout1 showing current limit point and converter shutdown point. When Vout1 is in current limit, Vout2 is not affected until Vout1 reaches the shut-down threshold of 1 V. Input voltage has almost no effect on Vout1 current limit characteristic.

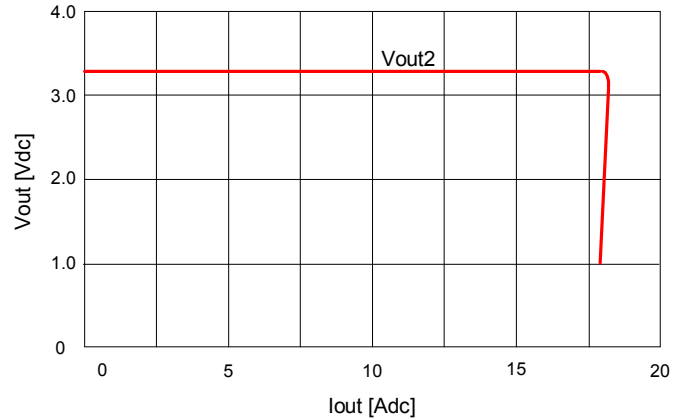


Fig. 31: Output voltage Vout2 vs. load current Iout2 showing current limit point and converter shutdown point. When Vout2 is in current limit, Vout1 will follow with less than 0.6 V difference until shut-down threshold of 1 V. Input voltage has almost no effect on Vout2 current limit characteristic.

QD48S018033 DC-DC Converter Data Sheet
36-75 VDC Input; 1.8 – 3.3 VDC @ 15A Output

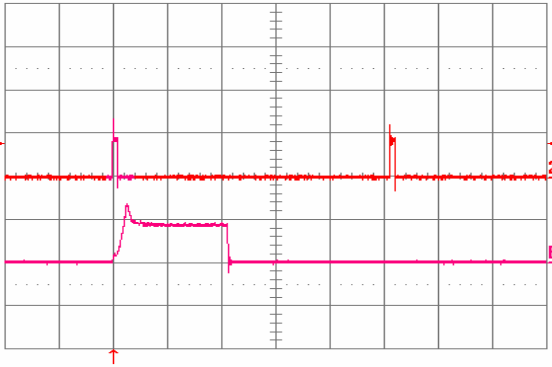


Fig. 32: Load current i_{out1} into a $10\text{ m}\Omega$ short circuit on V_{out1} during restart, with V_{out2} open (no load), at $V_{in} = 48\text{ V}$. Ch2 = i_{out1} (20 A/div, 20 ms/div). ChB = i_{out1} (20 A/div, 1 ms/div) is an expansion of the on-time portion of i_{out1} .

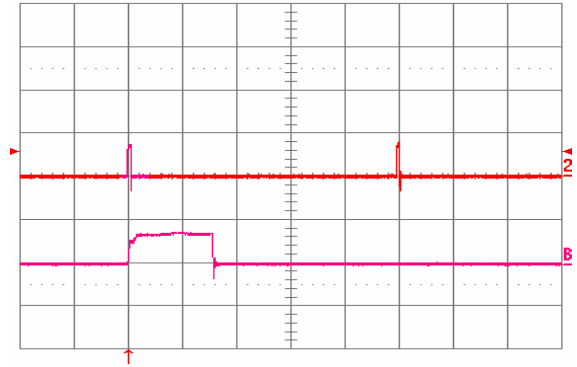


Fig. 33: Load current i_{out2} into a $10\text{ m}\Omega$ short circuit on V_{out2} during restart, with V_{out1} open (no load), at $V_{in} = 48\text{ V}$. Ch2 = i_{out2} (20 A/div, 20 ms/div). ChB = i_{out2} (20 A/div, 1 ms/div) is an expansion of the on-time portion of i_{out2} .

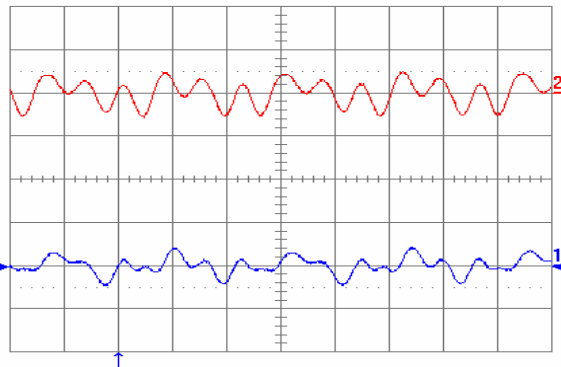


Fig. 34: Output voltage ripple at full rated load current into a resistive load on both outputs with $C_o = 1\mu\text{F}$ (ceramic) and $V_{in} = 48\text{ V}$. Ch2 = V_{out2} , Ch1 = V_{out1} (both 20 mV/div). Time scale: $1\mu\text{s/div}$.

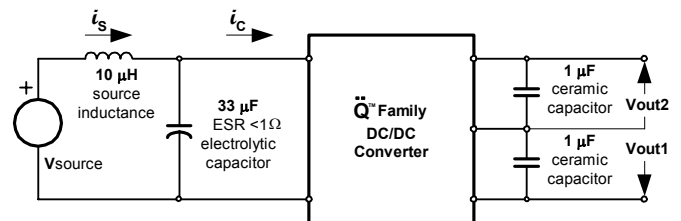


Fig. 35: Test setup for measuring input reflected ripple currents, i_c and i_s .

QD48S018033 DC-DC Converter Data Sheet
36-75 VDC Input; 1.8 – 3.3 VDC @ 15A Output

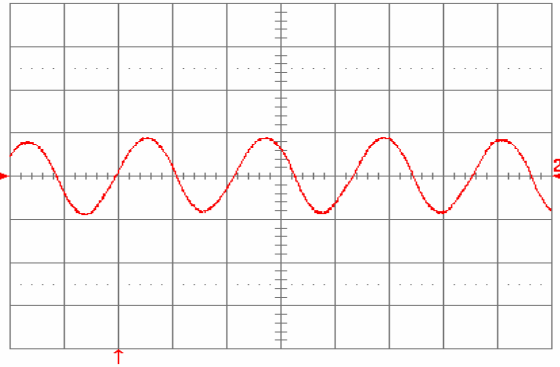


Fig. 36: Input reflected ripple current, i_c (100 mA/div), measured at input terminals at full rated load current on both outputs and $V_{in} = 48$ V. Refer to Fig. 35 for test setup. Time scale: 1 μ s/div.

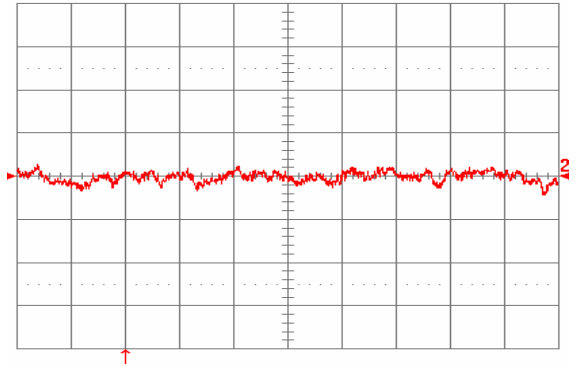


Fig. 37: Input reflected ripple current, i_s (10 mA/div), measured through 10 μ H at the source at full rated load current on both outputs and $V_{in} = 48$ V. Refer to Fig. 35 for test setup. Time scale: 1 μ s/div.

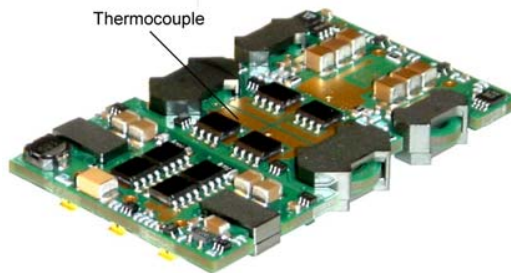


Fig. 38: Location of the thermocouple for thermal testing.

NUCLEAR AND MEDICAL APPLICATIONS - Power-One products are not designed, intended for use in, or authorized for use as components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of the respective divisional president of Power-One, Inc.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.