

Excellent Integrated System Limited

Stocking Distributor





Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[39920-0504](#)



For any questions, you can email us directly:

sales@integrated-circuit.com

MATERIAL NO.	ENGINEERING NUMBER	NUMBER OF CIRCUITS	DIM "A"	DIM "B"
-56 OPTION			.010/.13	
399200502	920502-56	02	1.150/29.21	.591/15.01
399200503	920503-56	03	1.740/44.20	1.181/30.00
399200504	920504-56	04	2.330/59.18	1.772/45.01
399200505	920505-56	05	2.920/74.17	2.362/59.99
399200506	920506-56	06	3.510/89.15	2.953/75.01
399200507	920507-56	07	4.100/104.14	3.543/89.99
399200508	920508-56	08	4.690/119.13	4.134/105.00
399200509	920509-56	09	5.280/134.11	4.724/119.99
399200510	920510-56	10	5.870/149.10	5.315/135.00
399200511	920511-56	11	6.470/164.43	5.906/150.01
399200512	920512-56	12	7.060/179.32	6.496/165.00



ACTUAL SIZE

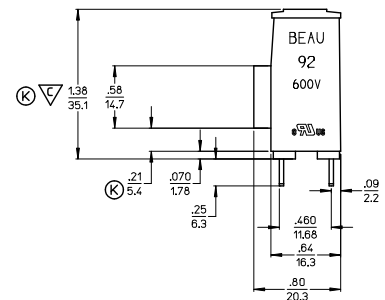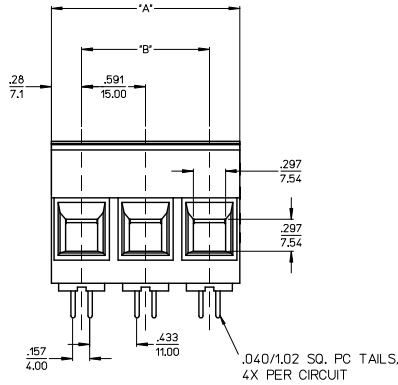

NOTES:

1. DESIGNED TO MEET NEC & UL 1059 CLASS C 600 VOLTS
2. "XX" REFERS TO THE NUMBER OF CIRCUIT POSITIONS.
3. ROHS COMPLIANT BY EXEMPTION. *

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
6	XX	SCREW, M5, #2 P02I-SLOT, ST. STEEL	S.S.	TIN
5	XX	TERMINAL	COPPER	TIN
4	XX	TERMINAL	COPPER	TIN
3	XX	CAGE *	BRASS	NICKEL
2	1	COVER	THERMOPLASTIC	BLACK
1	1	BODY	THERMOPLASTIC	BLACK

UPDATE DIM. ADD CTO. DIM.
EC NO: IFG2015-1881

DRWN: JENKINS 2013/09/10
CHKD: MACNEIL 2013/09/17
APPR: MACNEIL 2013/09/24

DESCRIPTION
REV

QUALITY SYMBOLS
▽=0
▽=1

GENERAL TOLERANCES (UNLESS SPECIFIED)	
	INCH
4 PLACES	±.0002
3 PLACES	±0.003 ±.005
2 PLACES	±0.13 ±.01
1 PLACE	±0.3 ±.1
ANGULAR ±1/2°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE	
IN/MM	
DRAWN BY	DATE
GHR	00/02/03
CHECKED BY	DATE
RKEMP	00/12/11
APPROVED BY	DATE
LROTHAUS	01/05/10
MATERIAL NO.	
DOCUMENT NO.	
SD-39920-005	

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
4:1	INCH	
TITLE		
SR, BTS, #3AWG 85A, 600V		
MOLEX INCORPORATED		
SHEET NO. 1 OF 1		