

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Bel Fuse Inc.](#)  
[QL48T30012-NBB0](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)


## QL48T30012 DC-DC Converter Data Sheet

### 36-75 VDC Input; 1.2 VDC @ 30A Output




The **QL48T30012** through-hole mounted low output voltage DC-DC converter offers unprecedented performance in the industry-standard quarter brick format. This is accomplished through the use of patent pending circuit and packaging techniques to achieve ultra-high efficiency, excellent thermal performance and a very low body profile.

In telecommunications applications the **Q Family** 30 A converters provide thermal performance that far exceeds all quarter bricks and is comparable even to existing half-bricks. Low body profile and the preclusion of heatsinks minimize airflow shadowing, thus enhancing cooling for downstream devices. The use of 100% surface-mount technologies for assembly, coupled with Power-One's advanced electric and thermal circuitry and packaging, results in a product with extremely high quality and reliability.

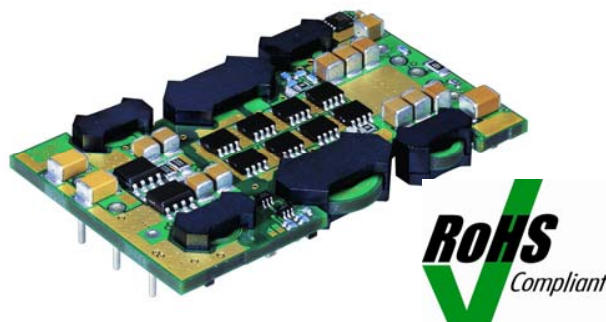

**QL48T30012 Converter**

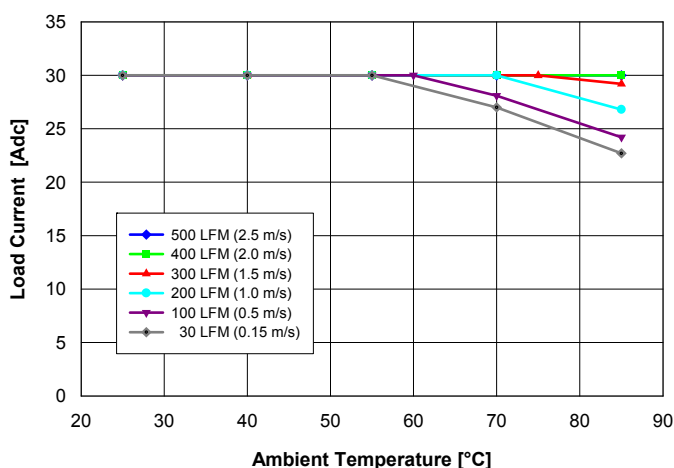

**Fig. 1:** Available load current vs. ambient air temperature and air-flow rates for QL48T30012 converter mounted vertically with air flowing from pin 3 to pin 1, MOSFET temperature  $\leq 120^{\circ}\text{C}$ ,  $V_{in} = 54\text{ V}$ .

## Applications

- Telecommunications
- Datacommunications
- Wireless
- Servers

## Features

- RoHS lead-free solder and lead-solder-exempted products are available
- Delivers up to 30 A
- Higher current capability at  $70^{\circ}\text{C}$  than existing quarter brick and half-brick converters
- High efficiency: 81% @ 30 A, 83% @ 15 A
- Starts-up into pre-biased output
- No minimum load required
- No heat sink required
- Low profile: 0.28" [7.2 mm]
- Low weight: 1 oz [28 g] typical
- Industry-standard footprint: 1.45" x 2.30"
- Industry-standard pinout
- Meets Basic Insulation Requirements of EN60950
- Withstands 100 V input transient for 100 ms
- On-board LC input filter
- Fixed-frequency operation
- Fully protected
- Remote output sense
- Output voltage trim range:  $\pm 10\%$
- High reliability: MTBF 2.6 million hours, calculated per Telcordia TR-332, Method I Case 1
- Positive or negative logic ON/OFF option
- UL 60950 recognized in U.S. & Canada, and DEMKO certified per IEC/EN 60950
- Meets conducted emissions requirements of FCC Class B and EN55022 Class B with external filter
- All materials meet UL94, V-0 flammability rating

## QL48T30012 DC-DC Converter Data Sheet

### 36-75 VDC Input; 1.2 VDC @ 30A Output



## Electrical Specifications

Conditions:  $T_A=25^{\circ}\text{C}$ , Airflow=300 LFM (1.5 m/s),  $V_{in}=48\text{ Vdc}$ , unless otherwise specified.

PARAMETER	NOTES	MIN	TYP	MAX	UNITS
<b>ABSOLUTE MAXIMUM RATINGS</b>					
Input Voltage	Continuous	0		80	Vdc
Operating Ambient Temperature		-40		85	$^{\circ}\text{C}$
Storage Temperature		-55		125	$^{\circ}\text{C}$
<b>INPUT CHARACTERISTICS</b>					
Operating Input Voltage Range		36	48	75	Vdc
Input Under Voltage Lockout	Non-latching				
Turn-on Threshold		33	34	35	Vdc
Turn-off Threshold		31	32	33	Vdc
Input Voltage Transient	100 ms			100	Vdc
<b>OUTPUT CHARACTERISTICS</b>					
External Load Capacitance	Plus full load (resistive)			30,000	$\mu\text{F}$
Output Current Range		0		30	A <sub>dc</sub>
Current Limit Inception	Non-latching	33	36	40	A <sub>dc</sub>
Peak Short-Circuit Current	Non-latching. Short=10m $\Omega$ .	33	45	55	A
RMS Short-Circuit Current	Non-latching			8	A <sub>rms</sub>
<b>ISOLATION CHARACTERISTICS</b>					
I/O Isolation		2000			Vdc
Isolation Capacitance			230		pF
Isolation Resistance		10			M $\Omega$
<b>FEATURE CHARACTERISTICS</b>					
Switching Frequency			415		kHz
Output Voltage Trim Range <sup>1</sup>	Use trim equations on Page 6	-10		+10	%
Remote Sense Compensation <sup>1</sup>	Percent of $V_{OUT(NOM)}$			+10	%
Output Over-Voltage Protection	Non-latching	117	122	127	%
Auto-Restart Period	Applies to all protection features		100		ms
Turn-On Time			2.5		ms
<b>ON/OFF Control (Positive Logic)</b>					
Converter Off		-20		0.8	Vdc
Converter On		2.4		20	Vdc
<b>ON/OFF Control (Negative Logic)</b>					
Converter Off		2.4		20	Vdc
Converter On		-20		0.8	Vdc

#### Additional Notes:

1.  $V_{out}$  can be increased up to 10% via the sense leads or up to 10% via the trim function, however total output voltage trim from all sources should not exceed 10% of  $V_{OUT(NOM)}$ , in order to insure specified operation of over-voltage protection circuitry. See further discussion at end of **Output Voltage Adjust / TRIM** section.

## QL48T30012 DC-DC Converter Data Sheet

### 36-75 VDC Input; 1.2 VDC @ 30A Output



## Electrical Specifications (continued)

Conditions:  $T_A=25^{\circ}\text{C}$ , Airflow=300 LFM (1.5 m/s),  $V_{in}=48\text{ Vdc}$ , unless otherwise specified.

PARAMETER	NOTES	MIN	TYP	MAX	UNITS
<b>INPUT CHARACTERISTICS</b>					
Maximum Input Current	30 A <sub>dc</sub> , 1.2 V <sub>dc</sub> Out @ 36 V <sub>dc</sub> In			1.25	A <sub>dc</sub>
Input Stand-by Current	$V_{in} = 48\text{ V}$ , converter disabled		3.8		mA <sub>dc</sub>
Input No Load Current (0 load on the output)	$V_{in} = 48\text{ V}$ , converter enabled		33		mA <sub>dc</sub>
Input Reflected-Ripple Current	See Figure 24 - 25MHz bandwidth		6		mA <sub>PK-PK</sub>
Input Voltage Ripple Rejection	120Hz		TBD		dB
<b>OUTPUT CHARACTERISTICS</b>					
Output Voltage Set Point (no load)		1.188	1.200	1.212	V <sub>dc</sub>
Output Regulation					
Over Line			±1	±3	mV
Over Load			±1	±3	mV
Output Voltage Range	Over line, load and temperature <sup>2</sup>	1.182		1.218	V <sub>dc</sub>
Output Ripple and Noise - 25MHz bandwidth	Full load + 10 $\mu\text{F}$ tantalum + 1 $\mu\text{F}$ ceramic		30	50	mV <sub>PK-PK</sub>
<b>DYNAMIC RESPONSE</b>					
Load Change 25% of I <sub>out</sub> Max, di/dt = 0.1 A/ $\mu\text{S}$	Co = 1 $\mu\text{F}$ ceramic (Fig.19)		50		mV
di/dt = 5 A/ $\mu\text{S}$	Co = 450 $\mu\text{F}$ tant. + 1 $\mu\text{F}$ ceramic (Fig.20)		140		mV
Setting Time to 1%			100		$\mu\text{s}$
<b>EFFICIENCY</b>					
100% Load			81		%
50% Load			83		%

Additional Notes:



2.  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$

## QL48T30012 DC-DC Converter Data Sheet

### 36-75 VDC Input; 1.2 VDC @ 30A Output



## Physical Information

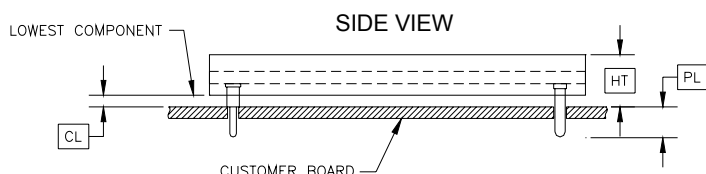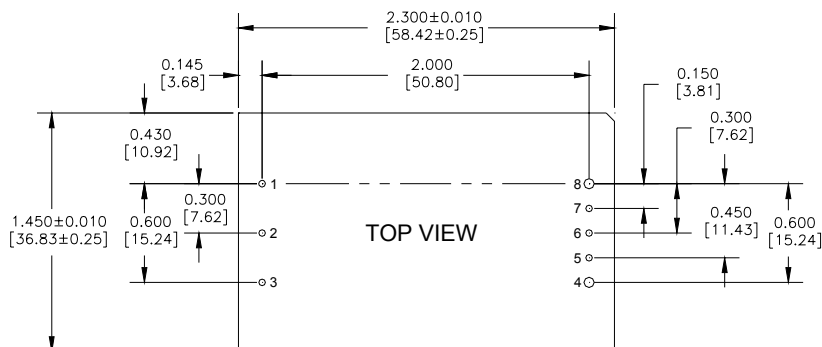

Pin Connections	
Pin #	Function
1	Vin (+)
2	ON/OFF
3	Vin (-)
4	Vout (-)
5	SENSE(-)
6	TRIM
7	SENSE(+)
8	Vout (+)

- All dimensions are in inches [mm]
- Pins 1-3 and 5-7 are  $\varnothing 0.040"$  [1.02] with  $\varnothing 0.078"$  [1.98] shoulder
- Pins 4 and 8 are  $\varnothing 0.062"$  [1.57] without shoulder
- Pin Material: Brass
- Pin Finish: Tin/Lead over Nickel
- Converter Weight: 1 oz [28 g] typical

Height Option	HT (Maximum Height)	CL (Minimum Clearance)
	+0.000 [+0.00] -0.038 [-0.97]	+0.016 [+0.41] -0.000 [-0.00]
A	0.303 [7.69]	0.030 [0.77]
B	0.336 [8.53]	0.063 [1.60]
C	0.500 [12.70]	0.227 [5.77]
D	0.400 [10.16]	0.127 [3.23]

Pin Option	PL (Pin Length)
	$\pm 0.005$ [ $\pm 0.13$ ]
A	0.188 [4.77]
B	0.145 [3.68]
C	0.110 [2.79]

## Converter Part Numbering Scheme

Product Series	Input Voltage	Mounting Scheme	Rated Load Current	Output Voltage	-	ON/OFF Logic	Maximum Height (HT)	Pin Length (PL)	Special Features
QL	48	T	30	012	-	N	B	A	0
Quarter-Brick Format, Low Output Voltage	36-75 V	Through-hole	30 Adc	012 ⇒ 1.2 V		N ⇒ Negative P ⇒ Positive	A ⇒ 0.303" B ⇒ 0.336" C ⇒ 0.500" D ⇒ 0.400"	A ⇒ 0.188" B ⇒ 0.145" C ⇒ 0.110"	0 ⇒ STD T ⇒ Alternative Trim Option

The example above describes P/N QL48T30012-NBA0: 36-75 V input, through-hole mounting, 30 A @ 1.2 V output, negative ON/OFF logic, a maximum height of 0.336", and a through the board pin length of 0.188". Please consult factory regarding availability of a specific version.

### RoHS Ordering Information:

- No RoHS suffix character is required for lead-solder-exemption compliance.
- For RoHS compliance to all six substances, add the letter "G" as the last letter of the part number.

## QL48T30012 DC-DC Converter Data Sheet

### 36-75 VDC Input; 1.2 VDC @ 30A Output



## Operation


### Input and Output Impedance

These power converters have been designed to be stable with no external capacitors when used in low inductance input and output circuits.

However, in many applications, the inductance associated with the distribution from the power source to the input of the converter can affect the stability of the converter. The addition of a 33  $\mu$ F electrolytic capacitor with an ESR  $< 1 \Omega$  across the input helps ensure stability of the converter. In many applications, the user has to use decoupling capacitance at the load. The power converter will exhibit stable operation with external load capacitance up to 30,000  $\mu$ F.

### ON/OFF (Pin 2)

The ON/OFF pin is used to turn the power converter on or off remotely via a system signal. There are two remote control options available, positive logic and negative logic and both are referenced to  $V_{in}(-)$ . Typical connections are shown in Fig. 2.

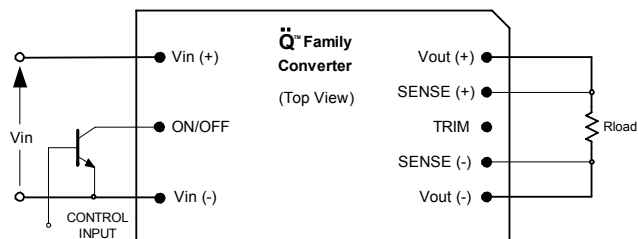

**Fig. 2:** Circuit configuration for ON/OFF function.

The positive logic version turns on when the ON/OFF pin is at logic high and turns off when at logic low. The converter is on when the ON/OFF pin is left open.


The negative logic version turns on when the pin is at logic low and turns off when the pin is at logic high. The ON/OFF pin can be hard wired directly to  $V_{in}(-)$  to enable automatic power up of the converter without the need of an external control signal.

ON/OFF pin is internally pulled-up to 5 V through a resistor. A mechanical switch, open collector transistor, or FET can be used to drive the input of the ON/OFF pin. The device must be capable of sinking up to 0.2 mA at a low level voltage of  $\leq 0.8$  V. An external voltage source of  $\pm 20$  V max.

may be connected directly to the ON/OFF input, in which case it should be capable of sourcing or sinking up to 1 mA depending on the signal polarity. See the Start-up Information section for system timing waveforms associated with use of the ON/OFF pin.

### Remote Sense (Pins 5 and 7)

The remote sense feature of the converter compensates for voltage drops occurring between the output pins of the converter and the load. The SENSE(-) (Pin 5) and SENSE(+) (Pin 7) pins should be connected at the load or at the point where regulation is required (see Fig. 3).

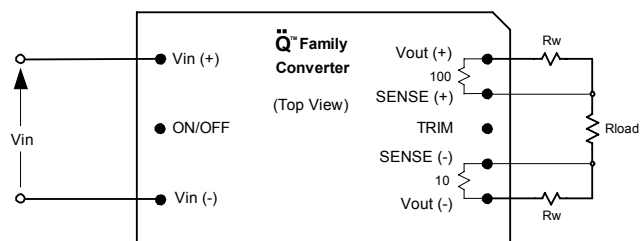

**Fig. 3:** Remote sense circuit configuration.

If remote sensing is not required, the SENSE(-) pin must be connected to the Vout(-) pin (Pin 4), and the SENSE(+) pin must be connected to the Vout(+) pin (Pin 8) to ensure the converter will regulate at the specified output voltage. If these connections are not made, the converter will deliver an output voltage that is slightly higher than the specified value.

Because the sense leads carry minimal current, large traces on the end-user board are not required. However, sense traces should be located close to a ground plane to minimize system noise and insure optimum performance. When wiring discretely, twisted pair wires should be used to connect the sense lines to the load to reduce susceptibility to noise.

The converter's output over-voltage protection (OVP) senses the voltage across Vout(+) and Vout(-), and not across the sense lines, so the resistance (and resulting voltage drop) between the output pins of the converter and the load should be minimized to prevent unwanted triggering of the OVP.

When utilizing the remote sense feature, care must be taken not to exceed the maximum allowable output power capability of the converter, equal to the product of the nominal output voltage and the allowable output current for the given conditions.



## QL48T30012 DC-DC Converter Data Sheet 36-75 VDC Input; 1.2 VDC @ 30A Output



When using remote sense, the output voltage at the converter can be increased by as much as 10% above the nominal rating in order to maintain the required voltage across the load. Therefore, the designer must, if necessary, decrease the maximum current (originally obtained from the derating curves) by the same percentage to ensure the converter's actual output power remains at or below the maximum allowable output power.

### Output Voltage Adjust /TRIM (Pin 6)

The converter's output voltage can be adjusted up 10% or down 10% relative to the rated output voltage by the addition of an externally connected resistor. For detailed description of the trim feature and pre-calculated trimming resistor values, see Application Note 103.

The TRIM pin should be left open if trimming is not being used. To minimize noise pickup, a 0.1  $\mu$ F capacitor is connected internally between the TRIM and SENSE(-) pins.

To increase the output voltage, refer to Fig. 4. A trim resistor,  $R_{T-INCR}$ , should be connected between the TRIM (Pin 6) and SENSE(+) (Pin 7), with a value of:

$$R_{T-INCR} = \frac{84.6}{\Delta} - 7.2 \text{ [k}\Omega\text{]}$$

where,

$R_{T-INCR}$  = Required value of trim-up resistor k $\Omega$

$V_{O-NOM}$  = Nominal value of output voltage [V]

$$\Delta = \frac{(V_{O-REQ} - V_{O-NOM})}{V_{O-NOM}} \times 100 \text{ [%]}$$

$V_{O-REQ}$  = Desired (trimmed) output voltage [V].

When trimming up, care must be taken not to exceed the converter's maximum allowable output power. See previous section for a complete discussion of this requirement.

To decrease the output voltage (Fig. 5), a trim resistor,  $R_{T-DECR}$ , should be connected between the TRIM (Pin 6) and SENSE(-) (Pin 5), with a value of:

$$R_{T-DECR} = \frac{700}{|\Delta|} - 15 \text{ [k}\Omega\text{]}$$

where,

$R_{T-DECR}$  = Required value of trim-down resistor [k $\Omega$ ]  
and  $\Delta$  is as defined above.

Converters are also available with alternative trim equations, to provide the customers with the flexibility of second sourcing:

$$R_{T-INCR} = \frac{485}{\Delta}$$

$$R_{T-DECR} = \frac{511}{|\Delta|} - 10.22$$

For these converters, the last character in the part number is "T".

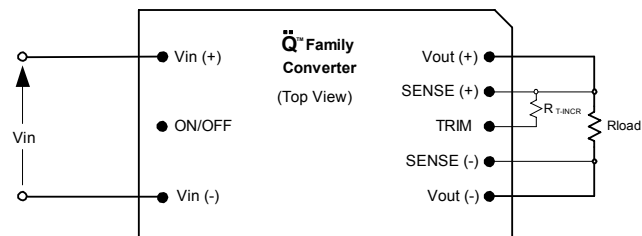


Fig. 4: Configuration for increasing output voltage.

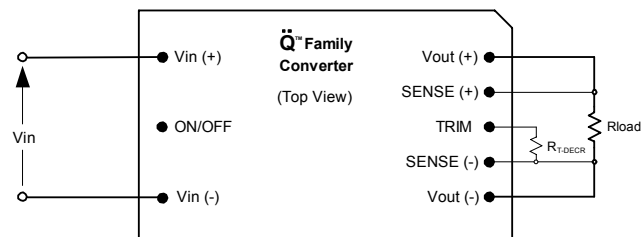


Fig. 5: Configuration for decreasing output voltage.

Trimming/sensing beyond 110% of the rated output voltage is not an acceptable design practice, as this condition could cause unwanted triggering of the output over-voltage protection (OVP) circuit. The designer should ensure that the difference between the voltages across the converter's output pins and its sense pins does not exceed 0.12 V, or:

$$[V_{OUT(+)} - V_{OUT(-)}] - [V_{SENSE(+)} - V_{SENSE(-)}] \leq 0.12 \text{ [V]}$$

This equation is applicable for any condition of output sensing and/or output trim.

## QL48T30012 DC-DC Converter Data Sheet

### 36-75 VDC Input; 1.2 VDC @ 30A Output



## Protection Features

### Input Undervoltage Lockout

Input undervoltage lockout is standard with this converter. The converter will shut down when the input voltage drops below a pre-determined voltage.

The input voltage must be at least 35 V for the converter to turn on. Once the converter has been turned on, it will shut off when the input voltage drops below 31 V. This feature is beneficial in preventing deep discharging of batteries used in telecom applications.

### Output Overcurrent Protection (OCP)

The converter is protected against overcurrent or short circuit conditions. Upon sensing an over-current condition, the converter will switch to constant current operation and thereby begin to reduce output voltage. When the output voltage drops below 0.6 Vdc, the converter will shut down (Fig. 25).

Once the converter has shut down, it will attempt to restart nominally every 100 ms with a 3% duty cycle (Fig 26). The attempted restart will continue indefinitely until the overload or short circuit conditions are removed or the output voltage rises above 0.6 Vdc.

### Output Overvoltage Protection (OVP)

The converter will shut down if the output voltage across Vout(+) (Pin 8) and Vout(-) (Pin 4) exceeds the threshold of the OVP circuitry. The OVP circuitry contains its own reference, independent of the output voltage regulation loop. Once the converter has shut down, it will attempt to restart every 100 ms until the OVP condition is removed.

### Overtemperature Protection (OTP)

The converter will shut down under an overtemperature condition to protect itself from overheating caused by operation outside the thermal derating curves, or operation in abnormal conditions such as system fan failure. After the converter has cooled to a safe operating temperature, it will automatically restart.

## Safety Requirements

The converters meet North American and International safety regulatory requirements per UL60950 and EN60950. Basic Insulation is provided between input and output.

To comply with safety agencies requirements, an input line fuse must be used external to the converter. A 2.5-A fuse is recommended for use with this product.

If one input fuse is used for a group of modules, the maximum fuse rating should not exceed 15-A (Q modules are UL approved with up to a 15-A fuse).

## Electromagnetic Compatibility (EMC)

EMC requirements must be met at the end-product system level, as no specific standards dedicated to EMC characteristics of board mounted component dc-dc converters exist. However, Power-One tests its converters to several system level standards, primary of which is the more stringent EN55022, *Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement*.

With the addition of a simple external filter (see application notes), all versions of the QL48T30 converters pass the requirements of Class B conducted emissions per EN55022 and FCC, and meet at a minimum, Class A radiated emissions per EN 55022 and Class B per FCC Title 47CFR, Part 15-J. Please contact Power-One Applications Engineering for details of this testing.



## QL48T30012 DC-DC Converter Data Sheet

### 36-75 VDC Input; 1.2 VDC @ 30A Output



## Characterization

### General Information

The converter has been characterized for many operational aspects, to include thermal derating (maximum load current as a function of ambient temperature and airflow) for vertical and horizontal mounting, efficiency, start-up and shutdown parameters, output ripple and noise, transient response to load step-change, overload and short circuit.

The following pages contain specific plots or waveforms associated with the converter. Additional comments for specific data are provided below.

### Test Conditions

All data presented were taken with the converter soldered to a test board, specifically a 0.060" thick printed wiring board (PWB) with four layers. The top and bottom layers were not metalized. The two inner layers, comprising two-ounce copper, were used to provide traces for connectivity to the converter.

The lack of metalization on the outer layers as well as the limited thermal connection ensured that heat transfer from the converter to the PWB was minimized. This provides a worst-case but consistent scenario for thermal derating purposes.

All measurements requiring airflow were made in Power-One's vertical and horizontal wind tunnel facilities using Infrared (IR) thermography and thermocouples for thermometry.

Ensuring components on the converter do not exceed their ratings is important to maintaining high reliability. If one anticipates operating the converter at or close to the maximum loads specified in the derating curves, it is prudent to check actual operating temperatures in the application. Thermographic imaging is preferable; if this capability is not available, then thermocouples may be used. Power-One recommends the use of AWG #40 gauge thermocouples to ensure measurement accuracy. Careful routing of the thermocouple leads will further minimize measurement error. Refer to Figure 27 for optimum measuring thermocouple location.

### Thermal Derating

Load current vs. ambient temperature and airflow rates are given in Figs. 9-12. Ambient temperature was varied be-

tween 25°C and 85°C, with airflow rates from 30 to 500 LFM (0.15 to 2.5 m/s), and vertical and horizontal converter mounting.

For each set of conditions, the maximum load current was defined as the lowest of:

- (i) The output current at which either any FET junction temperature did not exceed a maximum specified temperature (120°C) as indicated by the thermographic image, or
- (ii) The nominal rating of the converter (30 A).

During normal operation, derating curves with maximum FET temperature less than or equal to 120°C should not be exceeded. Temperature on the PCB at the thermocouple location shown in Fig. 27 should not exceed 118°C in order to operate inside the derating curves.

### Efficiency

Efficiency vs. load current plots are shown in Figs. 13 and 15 for ambient temperature of 25°C, airflow rate of 300 LFM (1.5 m/s), both vertical and horizontal orientations, and input voltages of 36 V, 54 V and 72 V. Also, plots of efficiency vs. load current, as a function of ambient temperature with  $V_{in} = 54$  V, airflow rate of 200 LFM (1 m/s) are shown for both a vertically and horizontally mounted converter in Figs. 14 and 16, respectively.

### Start-up

Output voltage waveforms, during the turn-on transient using the ON/OFF pin for full rated load currents (resistive load) are shown without and with 10,000  $\mu$ F load capacitance in Figs. 17 and 18, respectively.

### Ripple and Noise

Figure 21 shows the output voltage ripple waveform, measured at full rated load current with a 10  $\mu$ F tantalum and 1  $\mu$ F ceramic capacitor across the output. Note that all output voltage waveforms are measured across a 1  $\mu$ F ceramic capacitor.

The input reflected ripple current waveforms are obtained using the test setup shown in Fig 22. The corresponding waveforms are shown in Figs. 23 and 24.

## QL48T30012 DC-DC Converter Data Sheet

### 36-75 VDC Input; 1.2 VDC @ 30A Output



#### Start-up Information (using negative ON/OFF)

##### Scenario #1: Initial Start-up From Bulk Supply

ON/OFF function enabled, converter started via application of  $V_{IN}$ . See Figure 6.

Time	Comments
$t_0$	ON/OFF pin is ON; system front end power is toggled on, $V_{IN}$ to converter begins to rise.
$t_1$	$V_{IN}$ crosses Under-Voltage Lockout protection circuit threshold; converter enabled.
$t_2$	Converter begins to respond to turn-on command (converter turn-on delay).
$t_3$	Converter $V_{OUT}$ reaches 100% of nominal value.

For this example, the total converter start-up time ( $t_3 - t_1$ ) is typically 2.5 ms.

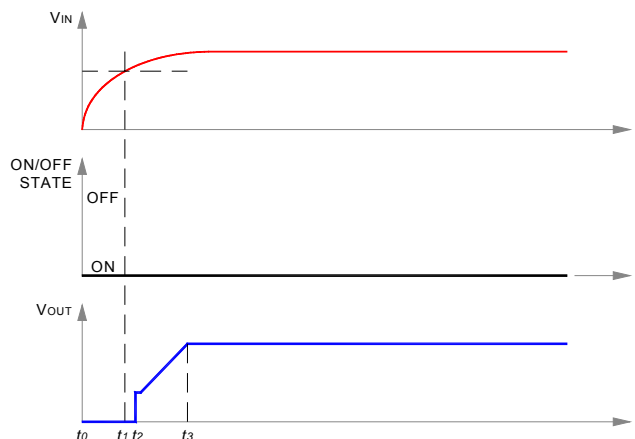


Fig. 6: Start-up scenario #1.

##### Scenario #2: Initial Start-up Using ON/OFF Pin

With  $V_{IN}$  previously powered, converter started via ON/OFF pin. See Figure 7.

Time	Comments
$t_0$	$V_{INPUT}$ at nominal value.
$t_1$	Arbitrary time when ON/OFF pin is enabled (converter enabled).
$t_2$	End of converter turn-on delay.
$t_3$	Converter $V_{OUT}$ reaches 100% of nominal value.

For this example, the total converter start-up time ( $t_3 - t_1$ ) is typically 2.5 ms.

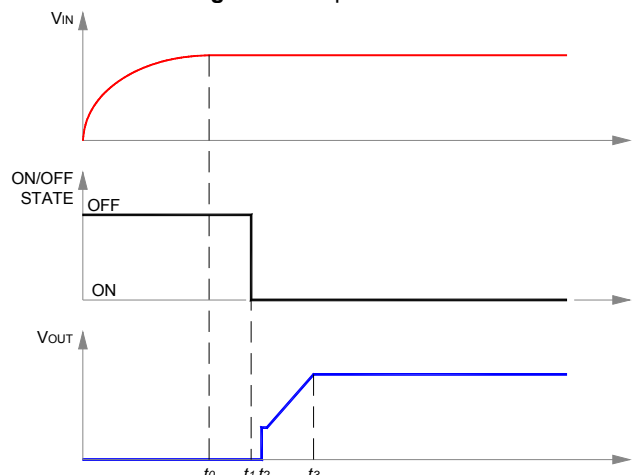


Fig. 7: Start-up scenario #2.

##### Scenario #3: Turn-off and Restart Using ON/OFF Pin

With  $V_{IN}$  previously powered, converter is disabled and then enabled via ON/OFF pin. See Figure 8.

Time	Comments
$t_0$	$V_{IN}$ and $V_{OUT}$ are at nominal values; ON/OFF pin ON.
$t_1$	ON/OFF pin arbitrarily disabled; converter output falls to zero; turn-on inhibit delay period (100 ms typical) is initiated, and ON/OFF pin action is internally inhibited.
$t_2$	ON/OFF pin is externally re-enabled. If $(t_2 - t_1) \leq 100$ ms, external action of ON/OFF pin is locked out by start-up inhibit timer. If $(t_2 - t_1) > 100$ ms, ON/OFF pin action is internally enabled.
$t_3$	Turn-on inhibit delay period ends. If ON/OFF pin is ON, converter begins turn-on; if off, converter awaits ON/OFF pin ON signal; see Figure 7.
$t_4$	End of converter turn-on delay.
$t_5$	Converter $V_{OUT}$ reaches 100% of nominal value.

For the condition,  $(t_2 - t_1) \leq 100$  ms, the total converter start-up time ( $t_5 - t_2$ ) is typically 102.5 ms. For  $(t_2 - t_1) > 100$  ms, start-up will be typically 2.5 ms after release of ON/OFF pin.


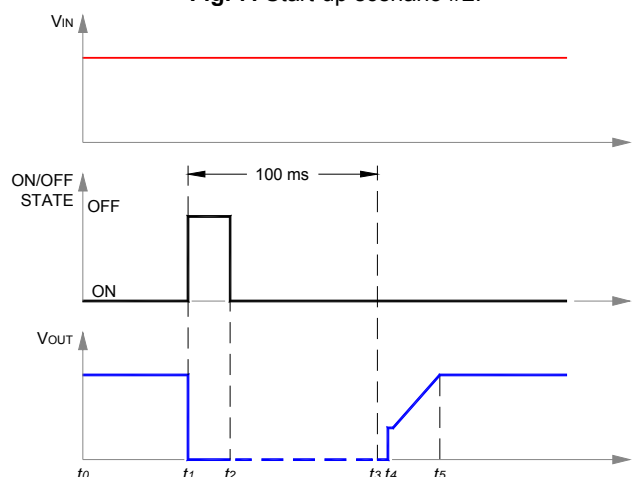



Fig. 8: Start-up scenario #3.

## QL48T30012 DC-DC Converter Data Sheet


### 36-75 VDC Input; 1.2 VDC @ 30A Output

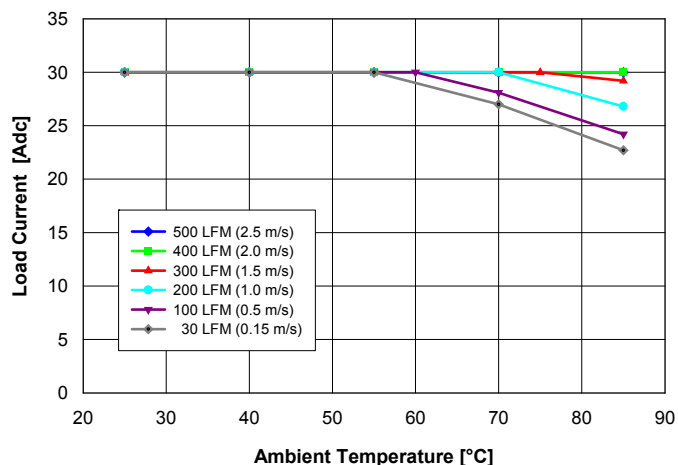


**Fig. 9:** Available load current vs. ambient air temperature and airflow rates for converter mounted vertically with  $V_{in} = 54$  V, air flowing from pin 3 to pin 1 and maximum FET temperature  $\leq 120^{\circ}\text{C}$ .

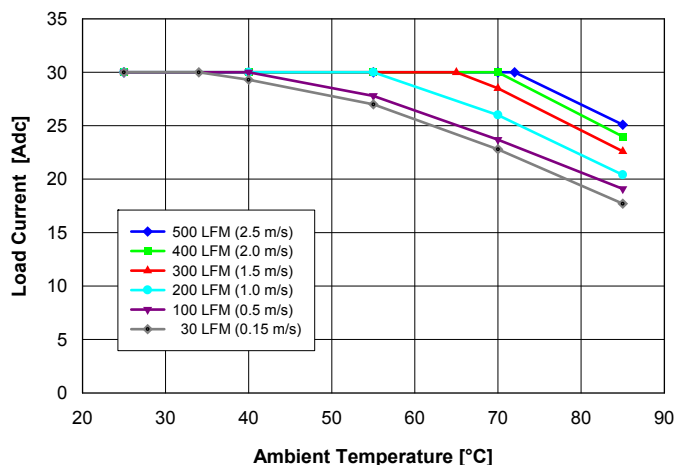

**Fig. 10:** Available load current vs. ambient air temperature and airflow rates for converter mounted vertically with  $V_{in} = 54$  V, air flowing from pin 3 to pin 1 and maximum FET temperature  $\leq 105^{\circ}\text{C}$ .

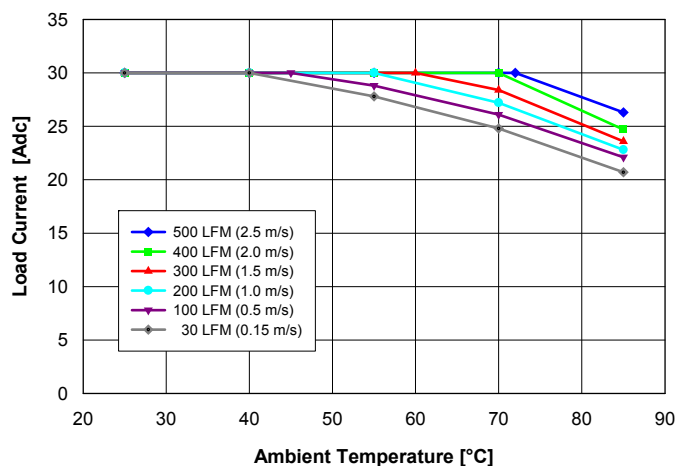


**Fig. 11:** Available load current vs. ambient temperature and airflow rates for converter mounted horizontally with  $V_{in} = 54$  V, air flowing from pin 3 to pin 4 and maximum FET temperature  $\leq 120^{\circ}\text{C}$ .

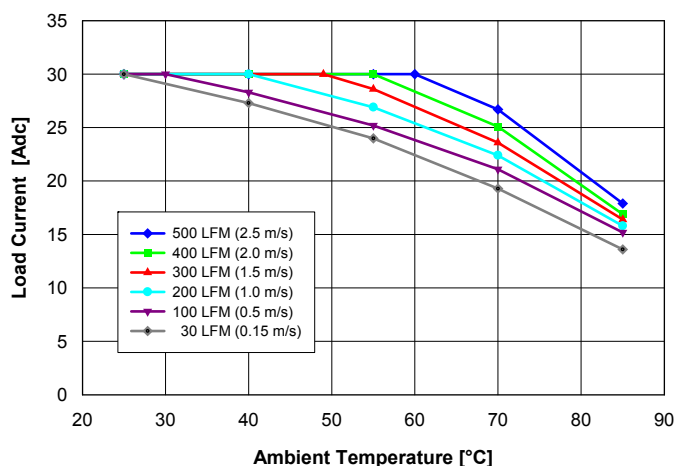


**Fig. 12:** Available load current vs. ambient temperature and airflow rates for converter mounted horizontally with  $V_{in} = 54$  V, air flowing from pin 3 to pin 4 and maximum FET temperature  $\leq 105^{\circ}\text{C}$ .

## QL48T30012 DC-DC Converter Data Sheet


### 36-75 VDC Input; 1.2 VDC @ 30A Output

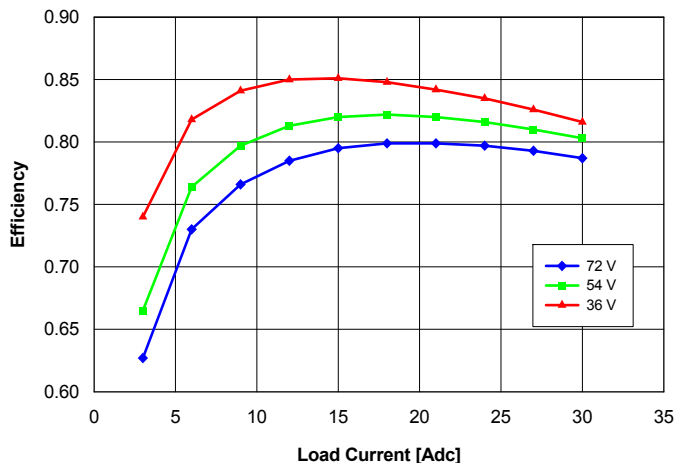


**Fig. 13:** Efficiency vs. load current and input voltage for converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and  $T_a = 25^\circ\text{C}$ .

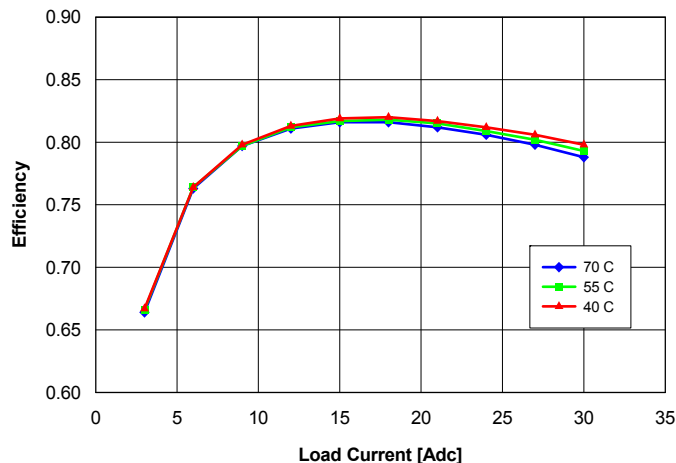

**Fig. 14:** Efficiency vs. load current and ambient temperature for converter mounted vertically with  $V_{in} = 54\text{ V}$  and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

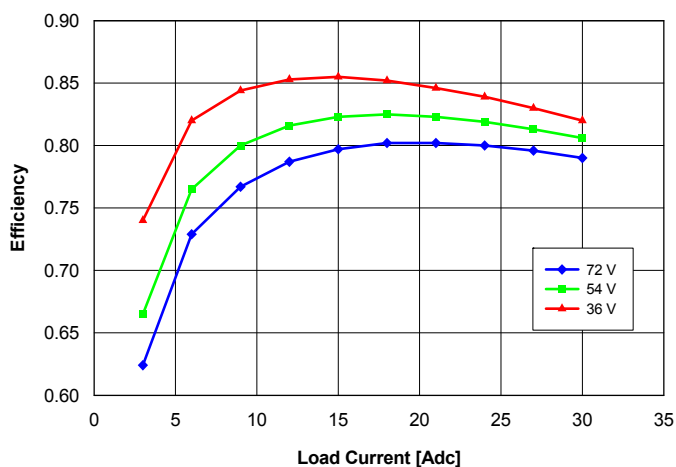


**Fig. 15:** Efficiency vs. load current and input voltage for converter mounted horizontally with air flowing from pin 3 to pin 4 at a rate of 300 LFM (1.5 m/s) and  $T_a = 25^\circ\text{C}$ .

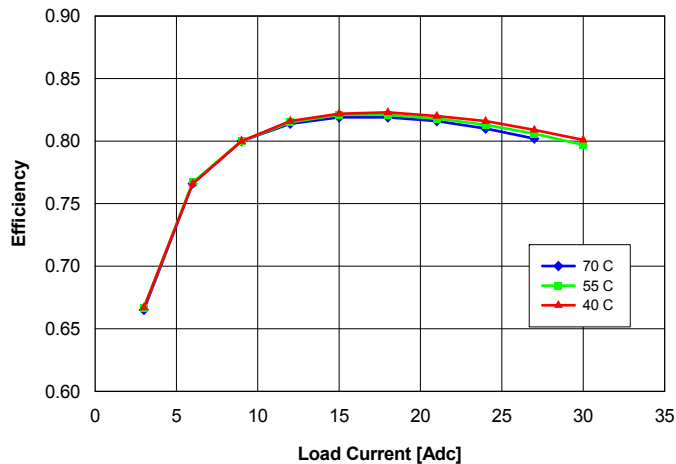


**Fig. 16:** Efficiency vs. load current and ambient temperature for converter mounted horizontally with  $V_{in} = 54\text{ V}$  and air flowing from pin 3 to pin 4 at a rate of 200 LFM (1.0 m/s).

## QL48T30012 DC-DC Converter Data Sheet


### 36-75 VDC Input; 1.2 VDC @ 30A Output

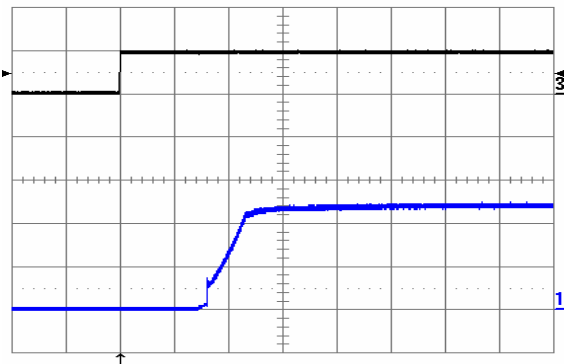


**Fig. 17:** Turn-on transient at full rated load current (resistive) with no output capacitor at  $V_{in} = 48\text{ V}$ , triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (0.5 V/div.). Time scale: 1 ms/div.

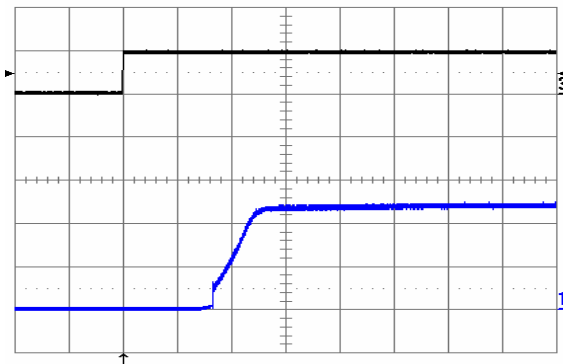

**Fig. 18:** Turn-on transient at full rated load current (resistive) plus 10,000  $\mu\text{F}$  at  $V_{in} = 48\text{ V}$ , triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (0.5 V/div.). Time scale: 1 ms/div.

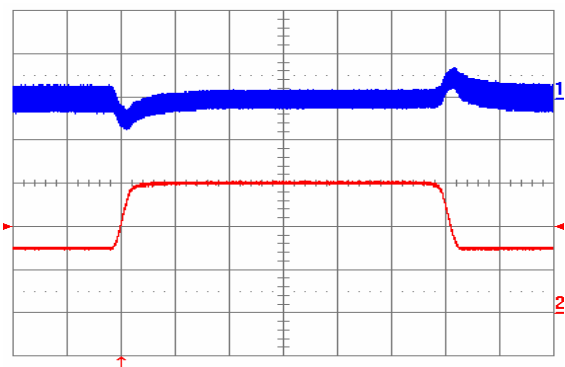


**Fig. 19:** Output voltage response to load current step-change (7.5 A – 15 A – 7.5 A) at  $V_{in} = 48\text{ V}$ . Top trace: output voltage (100 mV/div). Bottom trace: load current (5 A/div.). Current slew rate: 0.1 A/ $\mu\text{s}$ .  $C_o = 1\text{ }\mu\text{F}$  ceramic. Time scale: 0.2 ms/div.

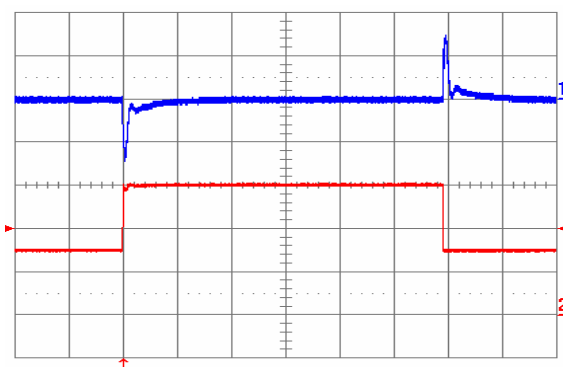


**Fig. 20:** Output voltage response to load current step-change (7.5 A – 15 A – 7.5 A) at  $V_{in} = 48\text{ V}$ . Top trace: output voltage (100 mV/div). Bottom trace: load current (5 A/div.). Current slew rate: 5 A/ $\mu\text{s}$ .  $C_o = 450\text{ }\mu\text{F}$  tantalum + 1  $\mu\text{F}$  ceramic. Time scale: 0.2 ms/div.

## QL48T30012 DC-DC Converter Data Sheet


### 36-75 VDC Input; 1.2 VDC @ 30A Output

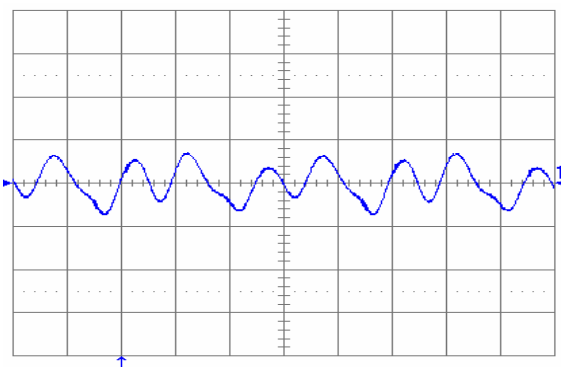


**Fig. 21:** Output voltage ripple (20 mV/div.) at full rated load current into a resistive load with  $C_o = 10 \mu\text{F}$  tantalum +  $1\mu\text{F}$  ceramic and  $V_{in} = 48 \text{ V}$ . Time scale:  $1 \mu\text{s}/\text{div}$ .

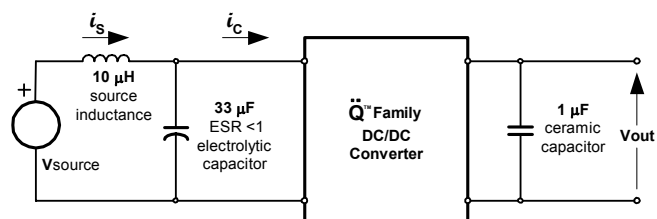

**Fig. 22:** Test setup for measuring input reflected ripple currents,  $i_c$  and  $i_s$ .

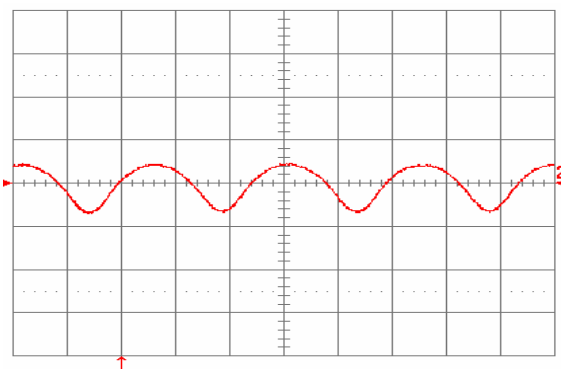

**Fig. 23:** Input reflected ripple current,  $i_c$  (100 mA/div), measured at input terminals at full rated load current and  $V_{in} = 48 \text{ V}$ . Refer to Fig. 22 for test setup. Time scale:  $1 \mu\text{s}/\text{div}$ .

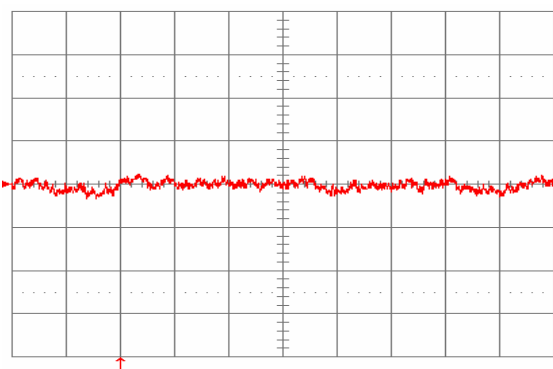


**Fig. 24:** Input reflected ripple current,  $i_s$  (10 mA/div), measured through  $10 \mu\text{H}$  at the source at full rated load current and  $V_{in} = 48 \text{ V}$ . Refer to Fig. 22 for test setup. Time scale:  $1 \mu\text{s}/\text{div}$ .




## QL48T30012 DC-DC Converter Data Sheet


### 36-75 VDC Input; 1.2 VDC @ 30A Output

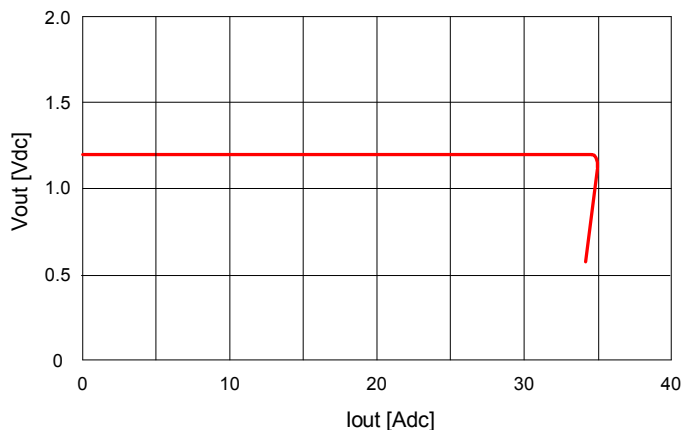

**Fig. 25:** Output voltage vs. load current showing current limit point and converter shutdown point. Input voltage has almost no effect on current limit characteristic.

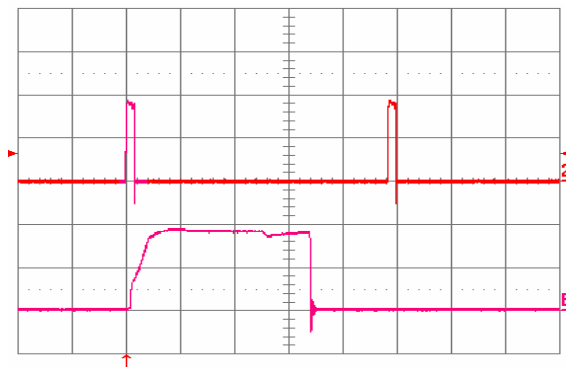

**Fig. 26:** Load current (top trace, 20 A/div, 20 ms/div) into a 10 mΩ short circuit during restart, at Vin = 48 V. Bottom trace (20 A/div, 1 ms/div) is an expansion of the on-time portion of the top trace.

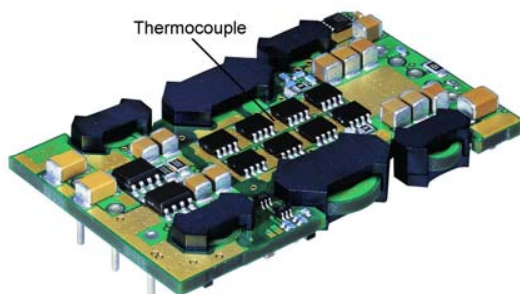

**Fig. 27:** Location of the thermocouple for thermal testing.

**NUCLEAR AND MEDICAL APPLICATIONS** - Power-One products are not designed, intended for use in, or authorized for use as components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of the respective divisional president of Power-One, Inc.

**TECHNICAL REVISIONS** - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.