

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[EPCOS \(TDK\)](#)
[B39881B7719C610](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



SAW Components

Data Sheet B7719

Data Sheet

A large, stylized graphic of the EPCOS logo is superimposed on a grayscale globe. The globe shows the outlines of continents and is set against a dark background. The EPCOS logo is rendered in a light, glowing white color, appearing to wrap around the globe.



SAW Components	B7719
Low-Loss Filter for Mobile Communication	881,5 MHz


Data Sheet



Chip sized SAW package DCS6I

Features

- Low-loss RF filter for mobile telephone GSM850 system, receive path
- Low amplitude ripple
- Usable passband 25 MHz
- Unbalanced to balanced operation
- Impedance transformation from 50 Ω to 200 Ω
- Suitable for GPRS class 1 to 12
- Ceramic package for **Surface Mounted Technology (SMT)**

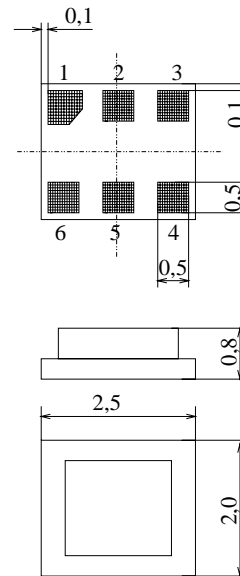


Dimensions in mm, approx. weight 0,014g

Terminals

- Ni, gold-plated

Pin configuration

- | | |
|---------|------------------|
| 2 | Unbalanced input |
| 4, 6 | Balanced output |
| 1, 3, 5 | To be grounded |



Type	Ordering code	Marking and Package according to	Packing according to
B7719	B39881-B7719-C610	C61157-A7-A76	F61074-V8112-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 30 / + 85	°C	peak power of GSM signal, duty cycle 4:8
Storage temperature range	T_{stg}	- 40 / + 85	°C	
DC voltage	V_{DC}	5	V	
ESD	V_{ESD}	50	V	
Input power at GSM850, GSM900, GSM1800 and GSM1900 Tx bands	P_{IN}	15	dBm	



SAW Components	B7719
Low-Loss Filter for Mobile Communication	881,5 MHz

Data Sheet



Characteristics

Operating temperature range: $T = 25 \pm 2 \text{ }^\circ\text{C}$
 Terminating source impedance: $Z_S = 50 \text{ } \Omega$ (unbalanced)
 Terminating load impedance: $Z_L = 200 \text{ } \Omega$ (balanced)

		min.	typ.	max.	
Center frequency	f_C	—	881,5	—	MHz
Maximum insertion attenuation	α_{max}	—	2,6	2,8	dB
869,0 ... 894,0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	1,0	1,2	dB
869,0 ... 894,0 MHz					
Unbalanced input VSWR		—	1,6	2,0	
869,0 ... 894,0 MHz					
Balanced output VSWR		—	1,7	2,0	
869,0 ... 894,0 MHz					
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^\circ$)		-10	—	+10	degree
869,0 ... 894,0 MHz					
Output amplitude balance (S_{31}/S_{21})		-2,0	—	2,0	dB
869,0 ... 894,0 MHz					
Common mode Suppression	S_{sc12}				
0,1 ... 849,0 MHz		20	45	—	
869,0 ... 894,0 MHz		20	25	—	
914,0 ... 6000,0 MHz		20	30	—	
Attenuation	α				
0,0 ... 824,0 MHz		40	60	—	dB
824,0 ... 849,0 MHz		40	57	—	dB
914,0 ... 935,0 MHz		28	33	—	dB
935,0 ... 1135,0 MHz		30	45	—	dB
1135,0 ... 1175,0 MHz		40	65	—	dB
1175,0 ... 2500,0 MHz		35	45	—	dB
2500,0 ... 4000,0 MHz		30	34	—	dB
4000,0 ... 6000,0 MHz		15	25	—	dB



SAW Components	B7719
Low-Loss Filter for Mobile Communication	881,5 MHz

**Data Sheet
 Characteristics**



Operating temperature range: $T = -20$ to $+80$ °C
 Terminating source impedance: $Z_S = 50$ Ω (unbalanced)
 Terminating load impedance: $Z_L = 200$ Ω (balanced)

		min.	typ.	max.	
Center frequency	f_C	—	881,5	—	MHz
Maximum insertion attenuation	α_{max}	—	2,8	3,1	dB
869,0 ... 894,0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	1,2	1,5	dB
869,0 ... 894,0 MHz					
Unbalanced input VSWR		—	1,6	2,0	
869,0 ... 894,0 MHz					
Balanced output VSWR		—	1,7	2,0	
869,0 ... 894,0 MHz					
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^\circ$)		-10	—	+10	degree
869,0 ... 894,0 MHz					
Output amplitude balance ($ S_{31}/S_{21} $)		-2,0	—	2,0	dB
869,0 ... 894,0 MHz					
Common mode Suppression	S_{sc12}	20	45	—	
0,1 ... 849,0 MHz					
869,0 ... 894,0 MHz		20	25	—	
914,0 ... 6000,0 MHz		20	30	—	
Attenuation	α				
0,0 ... 824,0 MHz		40	60	—	dB
824,0 ... 849,0 MHz		38	54	—	dB
914,0 ... 935,0 MHz		26	31	—	dB
935,0 ... 1135,0 MHz		30	45	—	dB
1135,0 ... 1175,0 MHz		40	65	—	dB
1175,0 ... 2500,0 MHz		35	45	—	dB
2500,0 ... 4000,0 MHz		30	34	—	dB
4000,0 ... 6000,0 MHz		15	25	—	dB



SAW Components	B7719
Low-Loss Filter for Mobile Communication	881,5 MHz

Data Sheet



Characteristics


Operating temperature range: $T = -30$ to $+85$ °C
 Terminating source impedance: $Z_S = 50$ Ω (unbalanced)
 Terminating load impedance: $Z_L = 200$ Ω (balanced)

		min.	typ.	max.	
Center frequency	f_C	—	881,5	—	MHz
Maximum insertion attenuation	α_{max}	—	2,8	3,2	dB
869,0 ... 894,0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	1,2	1,6	dB
869,0 ... 894,0 MHz					
Unbalanced input VSWR		—	1,6	2,0	
869,0 ... 894,0 MHz					
Balanced output VSWR		—	1,7	2,0	
869,0 ... 894,0 MHz					
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^\circ$)		-10	—	+10	degree
869,0 ... 894,0 MHz					
Output amplitude balance (S_{31}/S_{21})		-2,0	—	2,0	dB
869,0 ... 894,0 MHz					
Common mode Suppression	S_{sc12}	20	45	—	
0,1 ... 849,0 MHz					
869,0 ... 894,0 MHz		20	25	—	
914,0 ... 6000,0 MHz		20	30	—	
Attenuation	α				
0,0 ... 824,0 MHz		40	60	—	dB
824,0 ... 849,0 MHz		38	54	—	dB
914,0 ... 935,0 MHz		26	31	—	dB
935,0 ... 1135,0 MHz		30	45	—	dB
1135,0 ... 1175,0 MHz		40	65	—	dB
1175,0 ... 2500,0 MHz		35	45	—	dB
2500,0 ... 4000,0 MHz		30	34	—	dB
4000,0 ... 6000,0 MHz		15	25	—	dB




SAW Components	B7719
Low-Loss Filter for Mobile Communication	881,5 MHz
Data Sheet	SMD

Transfer function (spec at 25 °C)

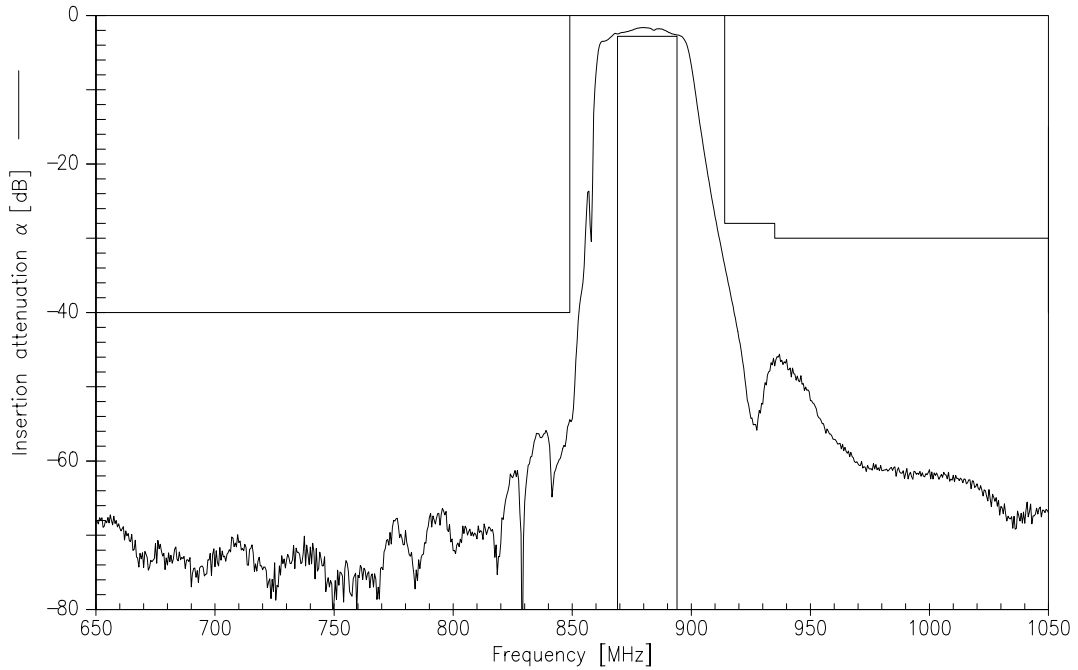



Transfer function (wideband)

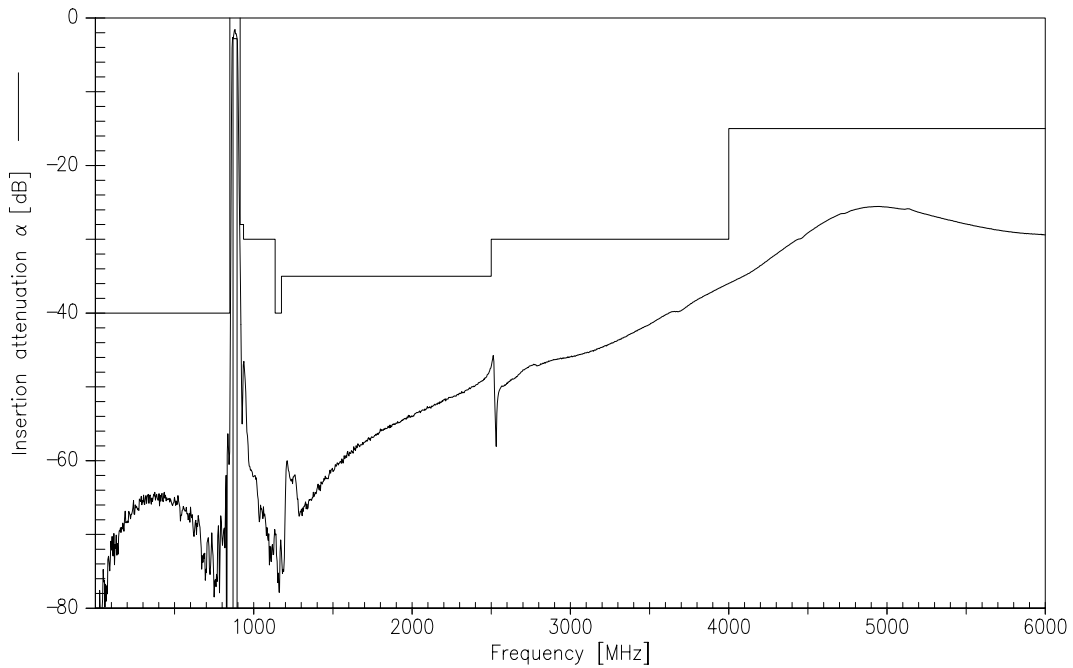



SAW Components	B7719
Low-Loss Filter for Mobile Communication	881,5 MHz
Data Sheet	


Matching (measurement; S22 is balanced output)

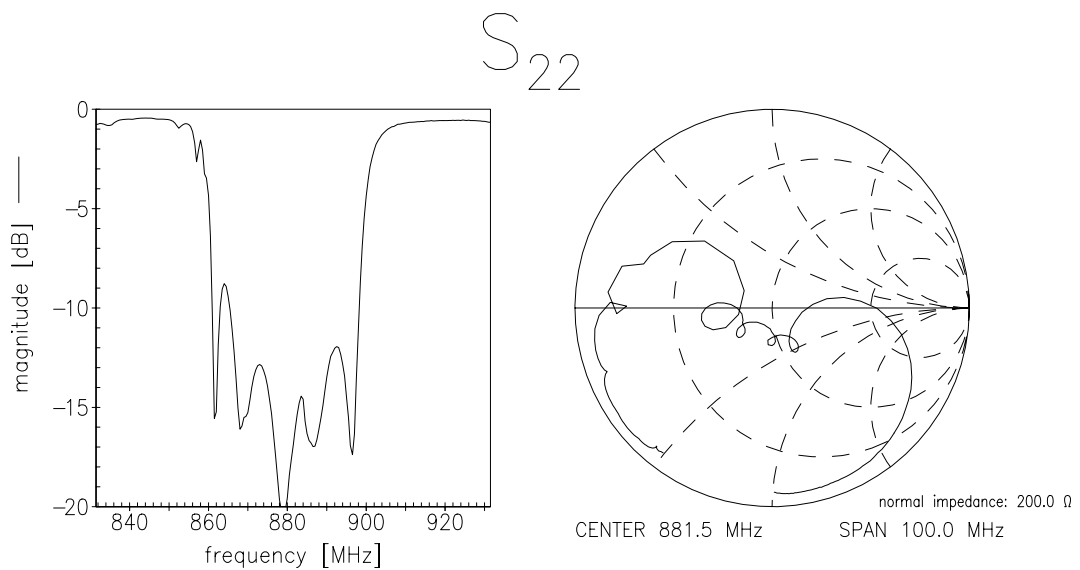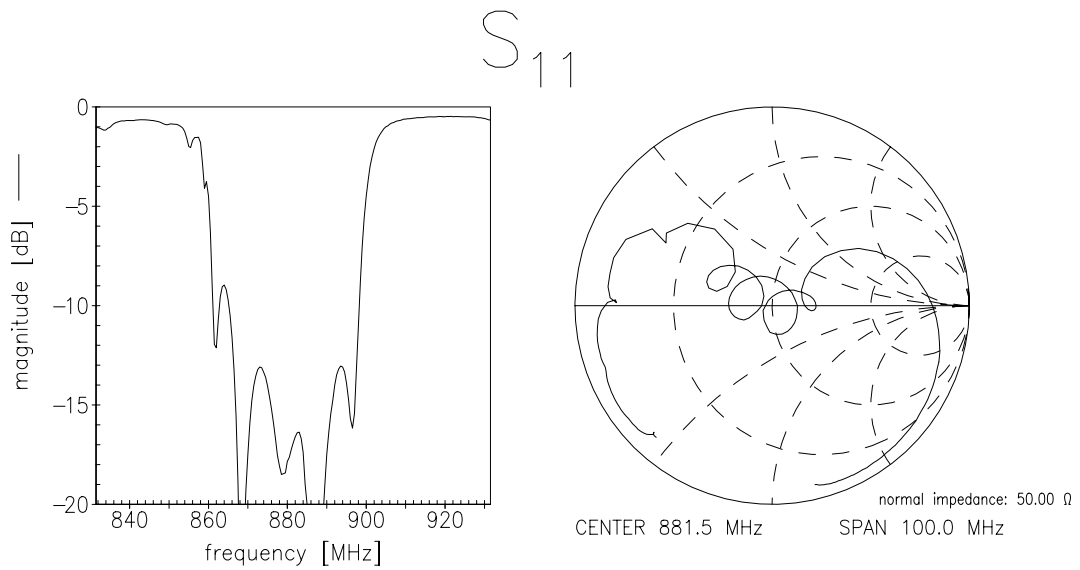




SAW Components	B7719
Low-Loss Filter for Mobile Communication	881,5 MHz
Data Sheet	

Input amplitude balance ($|S_{31}/S_{21}|$; measurement)

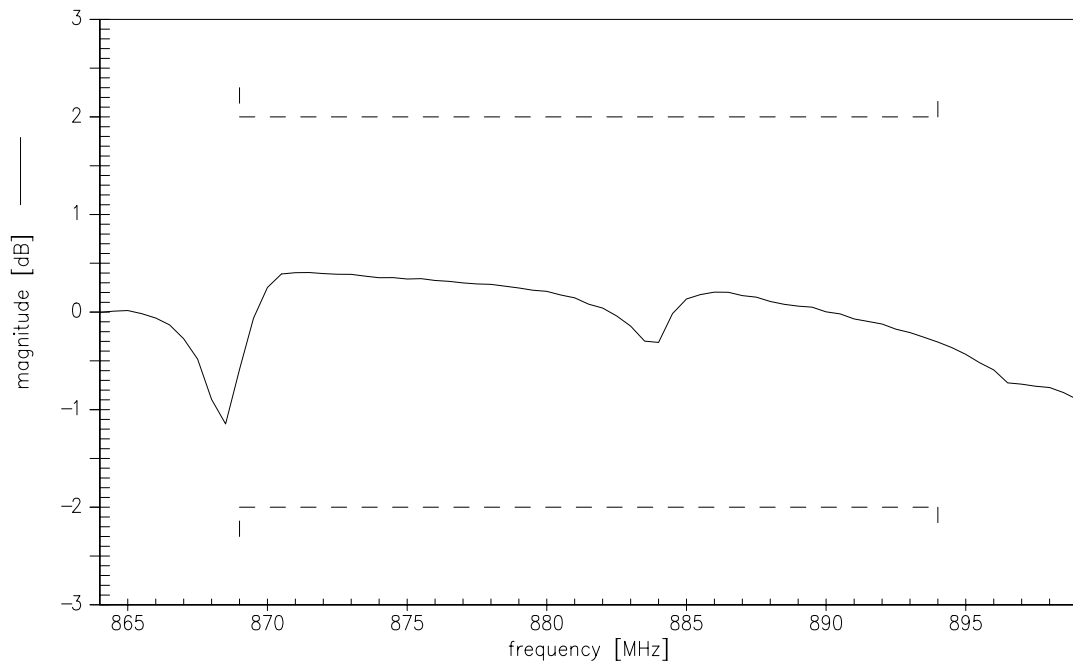

Input phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^\circ$; measurement)

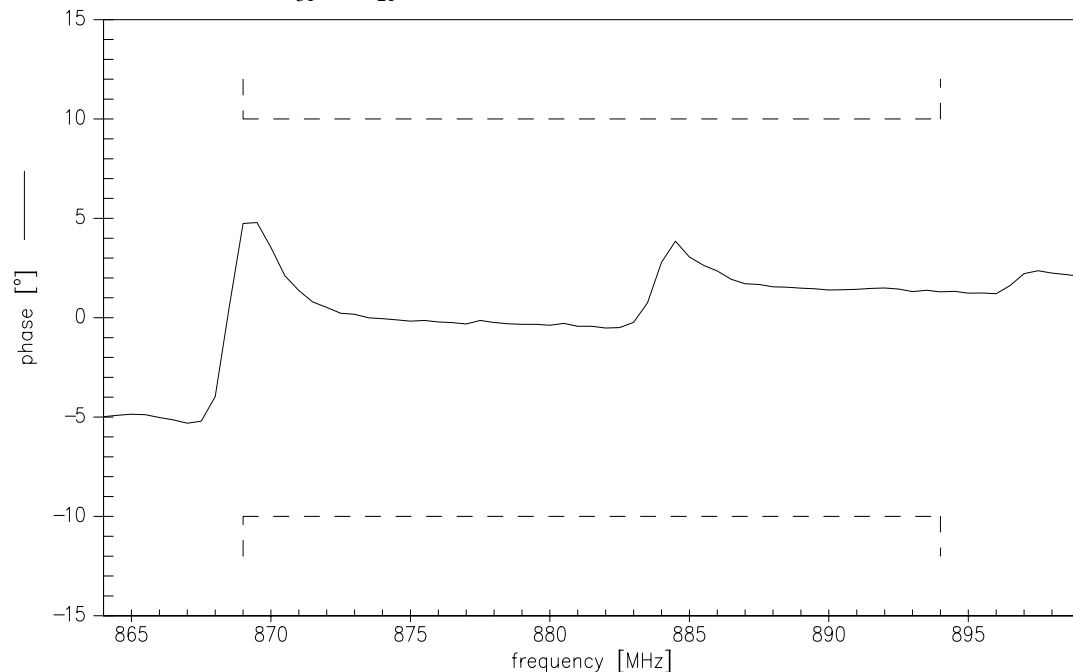



SAW Components	B7719
Low-Loss Filter for Mobile Communication	881,5 MHz
Data Sheet	

Published by EPCOS AG
Surface Acoustic Wave Components Division, SAW MC WT
P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.