

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cypress Semiconductor](#)

[CYK256K16MCBU-70BVXI](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



CYK256K16MCCB
MoBL3™

4-Mbit (256K x 16) Pseudo Static RAM

Features

- **Wide voltage range: 2.70V–3.30V**
- **Access time: 55 ns, 60 ns and 70 ns**
- **Ultra-low active power**
 - Typical active current: 1 mA @ f = 1 MHz
 - Typical active current: 8 mA @ f = f_{max} (70-ns speed)
- **Ultra low standby power**
- **Automatic power-down when deselected**
- **CMOS for optimum speed/power**
- **Offered in a 48-ball BGA package**

Functional Description^[1]


The CYK256K16MCCB is a high-performance CMOS Pseudo static RAM organized as 256K words by 16 bits that supports an asynchronous memory interface. This device features advanced circuit design to provide ultra-low active current. This is ideal for providing More Battery Life™ (MoBL®) in portable applications such as cellular telephones. The device

can be put into standby mode when deselected (\overline{CE} HIGH or both \overline{BHE} and \overline{BLE} are HIGH). The input/output pins (I/O_0 through I/O_{15}) are placed in a high-impedance state when: deselected (\overline{CE} HIGH), outputs are disabled (\overline{OE} HIGH), both \overline{BHE} High Enable and \overline{BLE} Low Enable are disabled (\overline{BHE} , \overline{BLE} HIGH), or during a write operation (\overline{CE} LOW and \overline{WE} LOW).

Writing to the device is accomplished by taking Chip Enable (\overline{CE} LOW) and Write Enable (\overline{WE}) input LOW. If \overline{BLE} is LOW, then data from I/O pins (I/O_0 through I/O_7) is written into the location specified on the address pins (A_0 through A_{17}). If \overline{BHE} is LOW, then data from I/O pins (I/O_8 through I/O_{15}) is written into the location specified on the address pins (A_0 through A_{17}).

Reading from the device is accomplished by taking Chip Enable (\overline{CE} LOW) and Output Enable (\overline{OE}) LOW while forcing the Write Enable (\overline{WE}) HIGH. If \overline{BLE} is LOW, then data from the memory location specified by the address pins will appear on I/O_0 to I/O_7 . If \overline{BHE} is LOW, then data from memory will appear on I/O_8 to I/O_{15} . Refer to the truth table for a complete description of read and write modes.

Logic Block Diagram

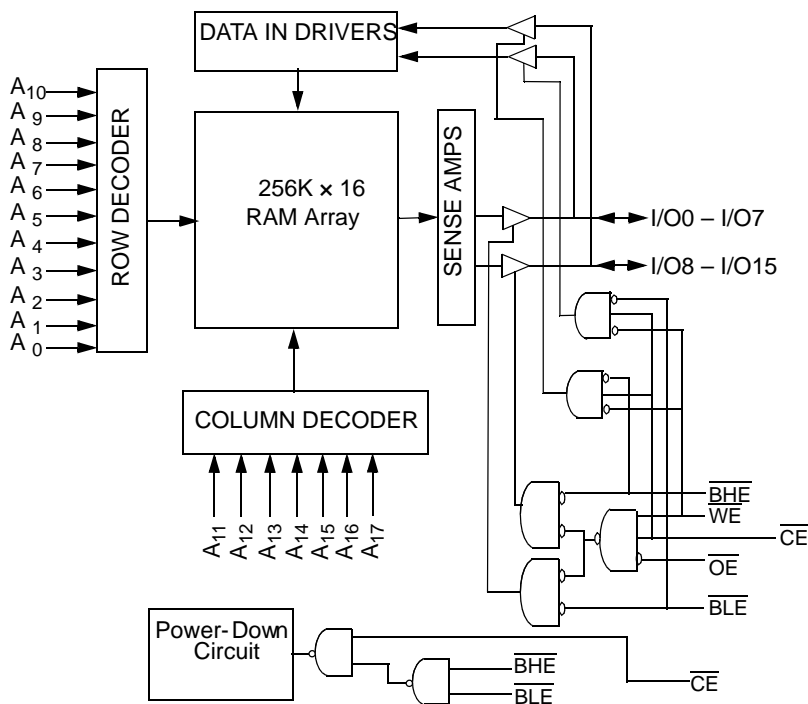


Note:

1. For best practice recommendations, please refer to the CY application note *System Design Guidelines* on <http://www.cypress.com>.



CYK256K16MCCB
MoBL3™

Pin Configuration^[2, 3, 4]

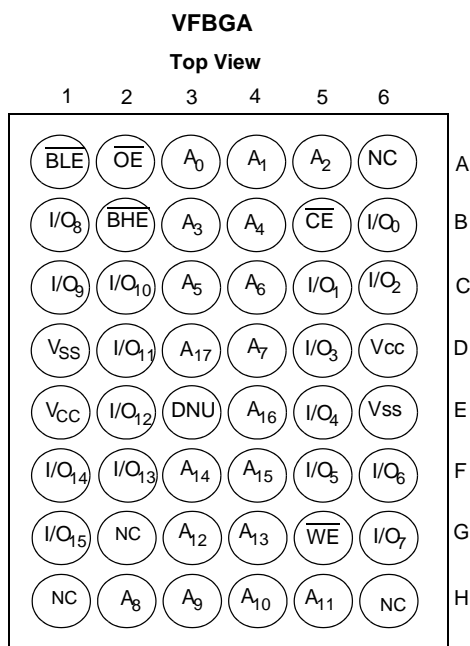

Product Portfolio

Product	V _{CC} Range (V)			Speed (ns)	Power Dissipation					
					Operating I _{CC} (mA)				Standby I _{SB2} (μA)	
					f = 1MHz		f = f _{max}			
					Min.	Typ. ^[5]	Max.	Typ. ^[5]	Max.	Typ. ^[5]
CYK256K16MCCB	2.70	3.0	3.30	55	1	5	14	22	17	40
				60			8	15		
				70						

Notes:

2. Ball H1, G2 and ball H6 for the VFBGA package can be used to upgrade to an 8-Mbit, 16-Mbit and 32-Mbit density, respectively.
3. NC "no connect" – not connected internally to the die.
4. DNU (Do Not Use) pins have to be left floating or tied to V_{SS} to ensure proper application.
5. Typical values are included for reference only and are not guaranteed or tested. Typical values are measured at V_{CC} = V_{CC(typ.)}, T_A = 25°C.



CYK256K16MCCB MoBL3™

Maximum Ratings

(Above which the useful life may be impaired. For user guidelines, not tested.)

Storage Temperature -65°C to + 150°C

Ambient Temperature with

Power Applied -55°C to + 125°C

Supply Voltage to Ground Potential -0.4V to 4.6V

DC Voltage Applied to Outputs

in High-Z State^[6, 7, 8] -0.4V to 3.7V

DC Input Voltage^[6, 7, 8] -0.4V to 3.7V

Output Current into Outputs (LOW) 20 mA

Static Discharge Voltage > 2001V
(per MIL-STD-883, Method 3015)

Latch-up Current > 200 mA

Operating Range

Range	Ambient Temperature	V _{CC}
Industrial	-25°C to +85°C	2.70V to 3.30V

Electrical Characteristics Over the Operating Range

Parameter	Description	Test Conditions	CYK256K16MCCB -55, 60, 70			Unit
			Min.	Typ. ^[5]	Max.	
V _{CC}	Supply Voltage		2.7	3.0	3.3	V
V _{OH}	Output HIGH Voltage	I _{OH} = -0.1 mA V _{CC} = 2.70V	V _{CC} - 0.4			V
V _{OL}	Output LOW Voltage	I _{OL} = 0.1 mA V _{CC} = 2.70V			0.4	V
V _{IH}	Input HIGH Voltage		0.8 * V _{CC}		V _{CC} + 0.4V	V
V _{IL}	Input LOW Voltage		-0.4		0.6	V
I _{IX}	Input Leakage Current	GND ≤ V _{IN} ≤ V _{CC}	-1		+1	μA
I _{OZ}	Output Leakage Current	GND ≤ V _{OUT} ≤ V _{CC} , Output Disabled	-1		+1	μA
I _{CC}	V _{CC} Operating Supply Current	f = f _{MAX} = 1/t _{RC} V _{CC} = V _{CCmax} I _{OUT} = 0 mA CMOS levels		14 for -55 14 for -60 8 for -70	22 for -55 22 for -60 15 for -70	mA
		f = 1 MHz		1 for all speeds	5 for all speeds	mA
I _{SB1}	Automatic CE Power-Down Current—CMOS Inputs	CE ≥ V _{CC} - 0.2V V _{IN} ≥ V _{CC} - 0.2V, V _{IN} ≤ 0.2V f = f _{MAX} (Address and Data Only), f = 0 (OE, WE, BHE and BLE), V _{CC} = 3.30V	V _{CC} = 3.3V	150	250	μA
I _{SB2}	Automatic CE Power-Down Current—CMOS Inputs	CE ≥ V _{CC} - 0.2V V _{IN} ≥ V _{CC} - 0.2V or V _{IN} ≤ 0.2V, f = 0, V _{CC} = 3.30V	V _{CC} = 3.3V	17	40	μA

Thermal Resistance^[9]

Parameter	Description	Test Conditions	BGA	Unit
θ _{JA}	Thermal Resistance (Junction to Ambient)	Test conditions follow standard test methods and procedures for measuring thermal impedance, per EIA/JESD51.	55	°C/W
θ _{JC}	Thermal Resistance (Junction to Case)		17	°C/W

Capacitance^[9]

Parameter	Description	Test Conditions	Max.	Unit
C _{IN}	Input Capacitance	T _A = 25°C, f = 1 MHz, V _{CC} = V _{CC(typ)}	8	pF
C _{OUT}	Output Capacitance		8	pF

Notes:

6. V_{IL(MIN)} = -0.5V for pulse durations less than 20 ns.

7. V_{IH(Max)} = V_{CC} + 0.5V for pulse durations less than 20 ns.


8. Overshoot and undershoot specifications are characterized and are not 100% tested.

9. Tested initially and after any design or process changes that may affect these parameters.



CYK256K16MCCB
MoBL3™

AC Test Loads and Waveforms

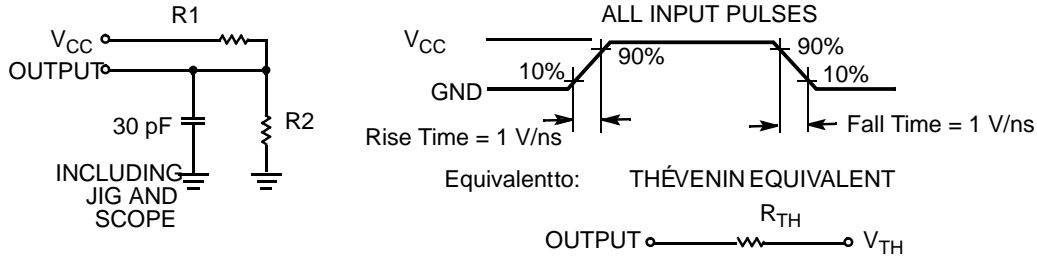

Parameters	3.0V V _{CC}	Unit
R1	22000	Ω
R2	22000	Ω
R _{TH}	11000	Ω
V _{TH}	1.50	V

Switching Characteristics Over the Operating Range^[10]

Parameter	Description	55 ns ^[14]		60 ns		70 ns		Unit
		Min.	Max.	Min.	Max.	Min.	Max.	
Read Cycle								
t _{RC}	Read Cycle Time	55		60		70		ns
t _{AA}	Address to Data Valid		55		60		70	ns
t _{OHA}	Data Hold from Address Change	5		8		10		ns
t _{ACE}	\overline{CE} LOW to Data Valid		55		60		70	ns
t _{DOE}	\overline{OE} LOW to Data Valid		25		25		35	ns
t _{LZOE}	\overline{OE} LOW to LOW Z ^[11, 13]	5		5		5		ns
t _{HZOE}	\overline{OE} HIGH to High Z ^[11, 13]		25		25		25	ns
t _{LZCE}	\overline{CE} LOW to Low Z ^[11, 13]	2		2		5		ns
t _{HZCE}	\overline{CE} HIGH to High Z ^[11, 13]		25		25		25	ns
t _{DBE}	BLE/BHE LOW to Data Valid		55		60		70	ns
t _{LZBE}	$\overline{BLE}/\overline{BHE}$ LOW to Low Z ^[11, 13]	5		5		5		ns
t _{HZBE}	$\overline{BLE}/\overline{BHE}$ HIGH to HIGH Z ^[11, 13]		10		10		25	ns
t _{SK} ^[14]	Address Skew		0		5		10	ns
Write Cycle ^[12]								
t _{WC}	Write Cycle Time	55		60		70		ns
t _{SCE}	\overline{CE} LOW to Write End	45		45		60		ns
t _{AW}	Address Set-Up to Write End	45		45		55		ns
t _{HA}	Address Hold from Write End	0		0		0		ns
t _{SA}	Address Set-Up to Write Start	0		0		0		ns
t _{PWE}	\overline{WE} Pulse Width	40		40		45		ns

Notes:

- Test conditions for all parameters other than tri-state parameters assume signal transition time of 1 ns/V, timing reference levels of V_{CC(typ)}/2, input pulse levels of 0V to V_{CC(typ)}, and output loading of the specified I_{OL}/I_{OH} as shown in the "AC Test Loads and Waveforms" section.
- t_{HZOE}, t_{HZCE}, t_{HZBE}, and t_{HZWE} transitions are measured when the outputs enter a high impedance state.
- The internal Write time of the memory is defined by the overlap of \overline{WE} , $\overline{CE} = V_{IL}$, \overline{BHE} and/or $\overline{BLE} = V_{IL}$. All signals must be ACTIVE to initiate a write and any of these signals can terminate a write by going INACTIVE. The data input set-up and hold timing should be referenced to the edge of the signal that terminates the write.
- High-Z and Low-Z parameters are characterized and are not 100% tested.
- To achieve 55-ns performance, the read access should be \overline{CE} controlled. In this case t_{ACE} is the critical parameter and t_{SK} is satisfied when the addresses are stable prior to chip enable going active. For the 70-ns cycle, the addresses must be stable within 10 ns after the start of the read cycle.




CYK256K16MCCB
MoBL3™

Switching Characteristics Over the Operating Range^[10] (continued)


Parameter	Description	55 ns ^[14]		60 ns		70 ns		Unit
		Min.	Max.	Min.	Max.	Min.	Max.	
t _{BW}	BLE/BHE LOW to Write End	50		50		55		ns
t _{SD}	Data Set-Up to Write End	25		25		25		ns
t _{HD}	Data Hold from Write End	0		0		0		ns
t _{HZWE}	WE LOW to High-Z ^[11, 13]		25		25		25	ns
t _{LZWE}	WE HIGH to Low-Z ^[11, 13]	5		5		5		ns

Switching Waveforms

Read Cycle 1 (Address Transition Controlled)^[14, 15, 16]

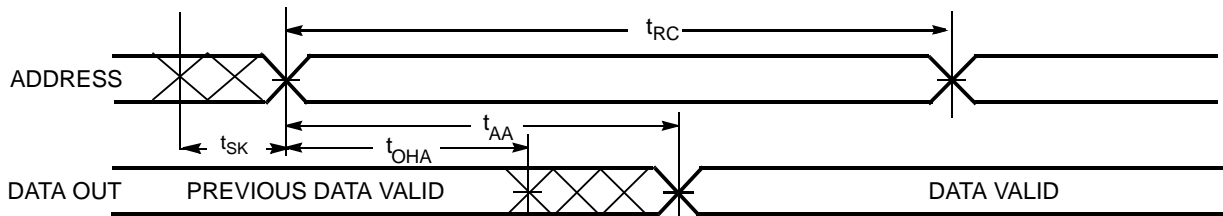

Read Cycle 2 (OE Controlled)^[14, 16]

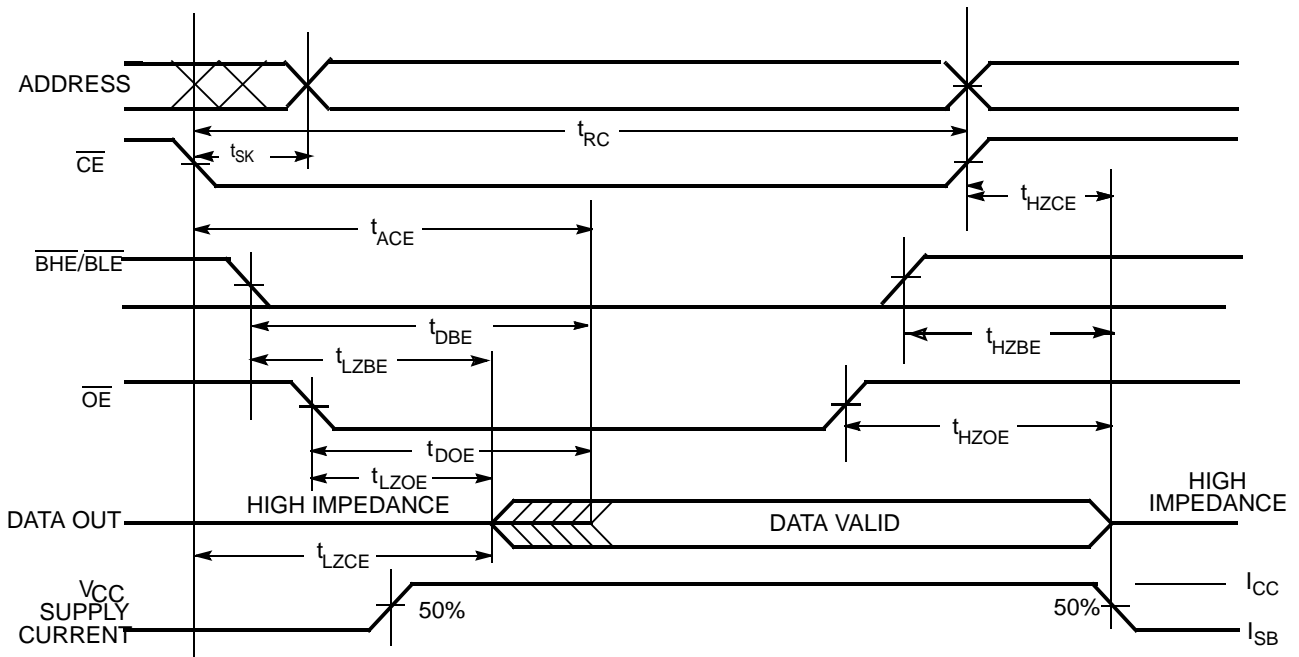


Notes:
 15. Device is continuously selected. $\overline{OE}, \overline{CE} = V_{IL}$.
 16. WE is HIGH for Read Cycle.




CYK256K16MCCB
MoBL3™

Switching Waveforms (continued)

Write Cycle 1 (\overline{WE} Controlled)^[12, 13, 17, 18, 19]

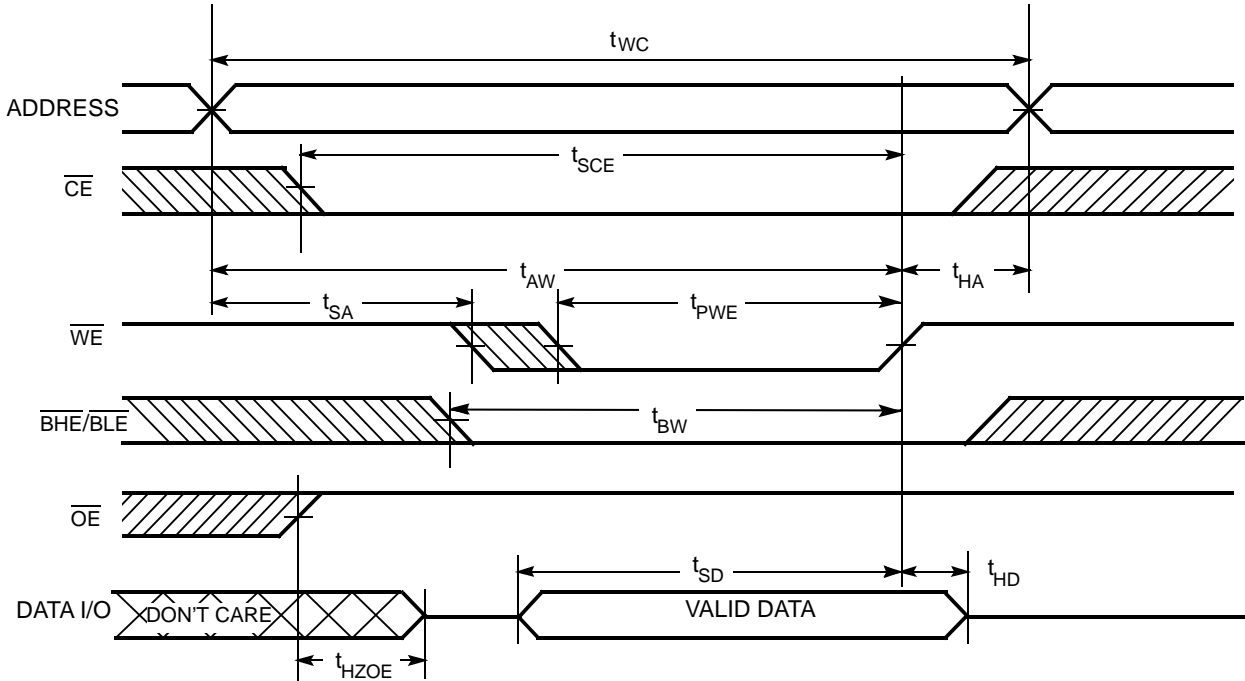

Write Cycle 2 (\overline{CE} Controlled)^[12, 13, 17, 18, 19]

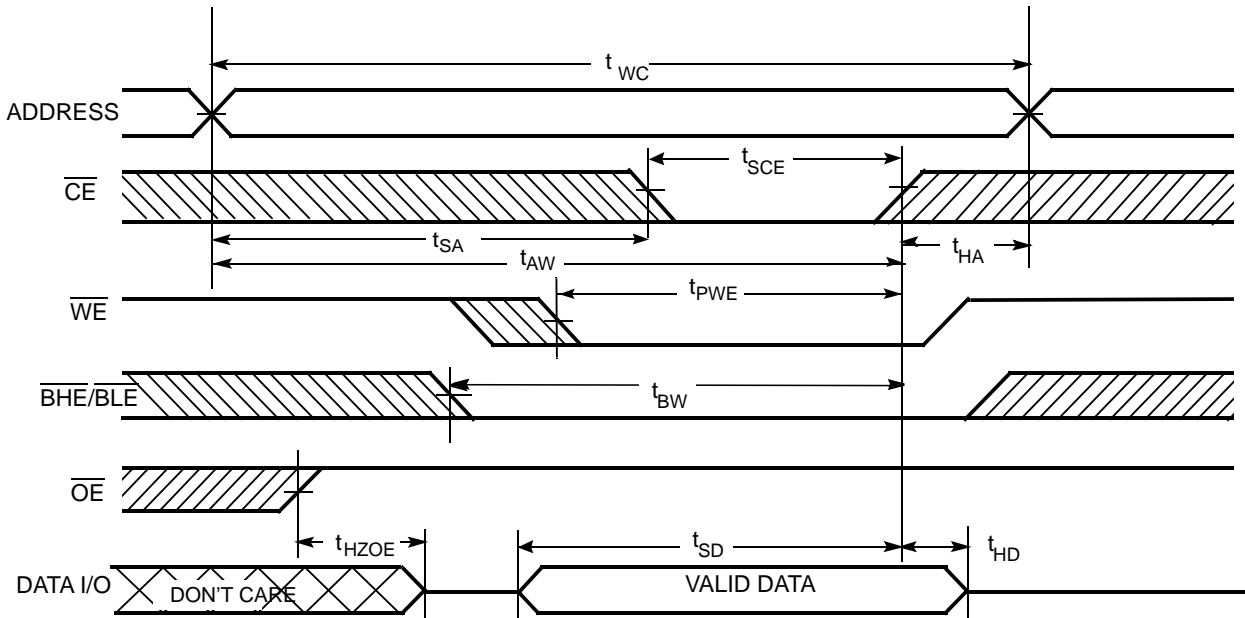

Notes:


- 17. Data I/O is high-impedance if $\overline{OE} \geq V_{IH}$.
- 18. If Chip Enable goes INACTIVE with $\overline{WE} = V_{IH}$, the output remains in a high-impedance state.
- 19. During this period in the DATA I/O waveform, the I/Os could be in the output state and input signals should not be applied.




CYK256K16MCCB
MoBL3™

Switching Waveforms (continued)

Write Cycle 3 (\overline{WE} Controlled, \overline{OE} LOW)^[18, 19]

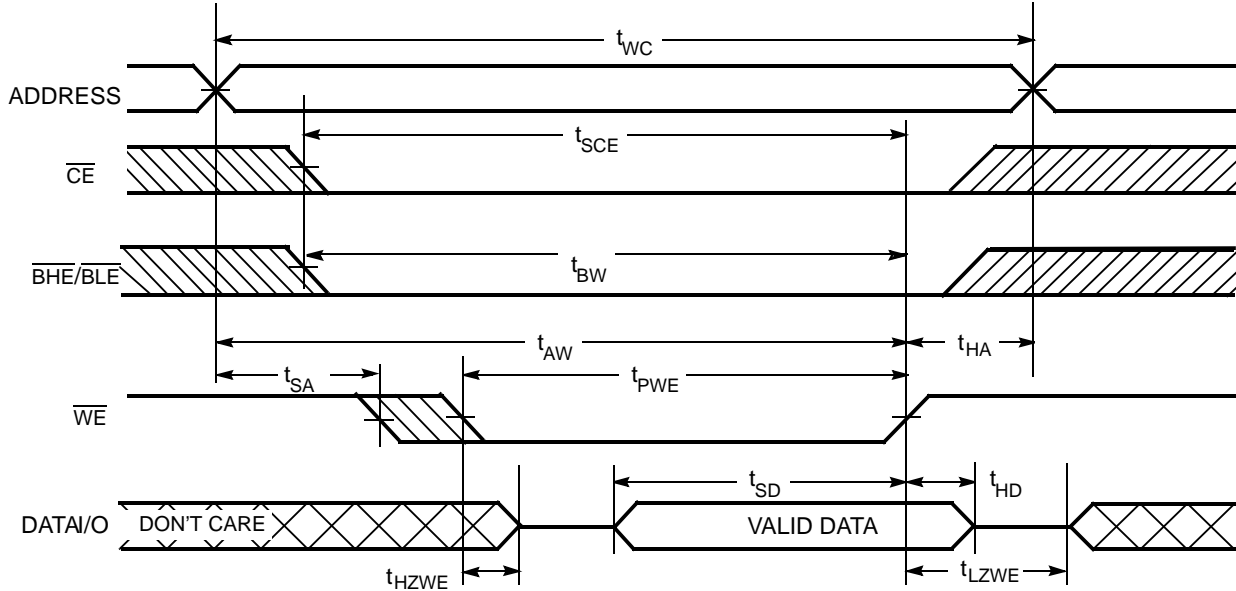

Write Cycle 4 ($\overline{BHE}/\overline{BLE}$ Controlled, \overline{OE} LOW)^[18, 19]

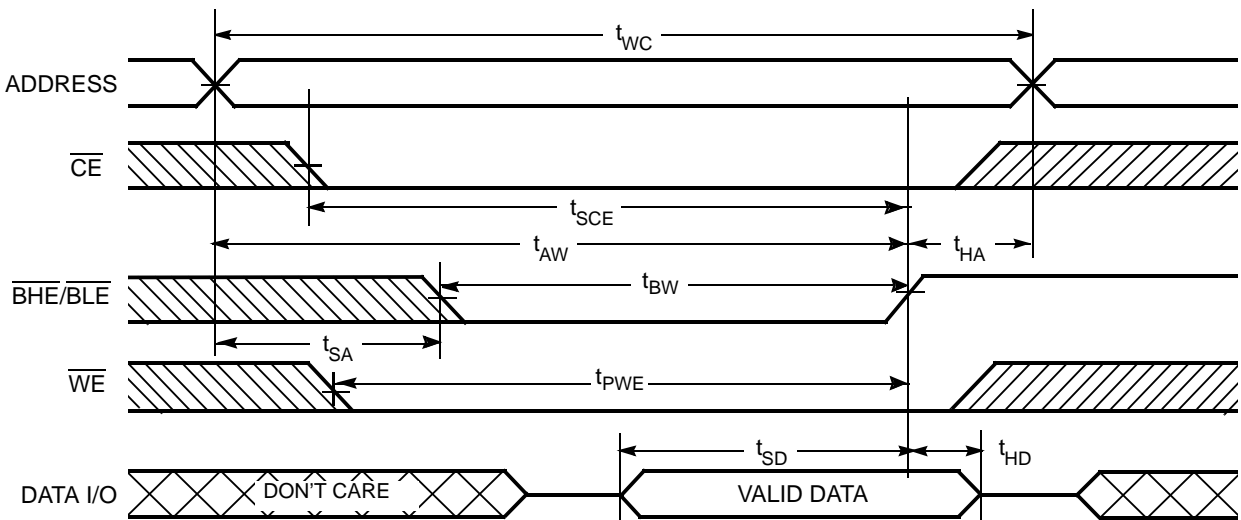



CYK256K16MCCB
MoBL3™

Truth Table ^[20]

CE	WE	OE	BHE	BLE	Inputs/Outputs	Mode	Power
H	X	X	X	X	High Z	Deselect/Power-Down	Standby (I _{SB})
X	X	X	H	H	High Z	Deselect/Power-Down	Standby (I _{SB})
L	H	L	L	L	Data Out (I/O0 – I/O15)	Read	Active (I _{CC})
L	H	L	H	L	Data Out (I/O0 – I/O7); High Z (I/O8 – I/O15)	Read	Active (I _{CC})
L	H	L	L	H	High Z (I/O0 – I/O7); Data Out (I/O8 – I/O15)	Read	Active (I _{CC})
L	H	H	L	H	High Z	Output Disabled	Active (I _{CC})
L	H	H	H	L	High Z	Output Disabled	Active (I _{CC})
L	H	H	L	L	High Z	Output Disabled	Active (I _{CC})
L	L	X	L	L	Data In (I/O0 – I/O15)	Write	Active (I _{CC})
L	L	X	H	L	Data In (I/O0 – I/O7); High Z (I/O8 – I/O15)	Write	Active (I _{CC})
L	L	X	L	H	High Z (I/O0 – I/O7); Data In (I/O8 – I/O15)	Write	Active (I _{CC})

Ordering Information


Speed (ns)	Ordering Code	Package Diagram	Package Type	Operating Range
55	CYK256K16MCCBU-55BVI	51-85150	48-ball Fine Pitch BGA (6 mm × 8mm × 1.0 mm)	Industrial
	CYK256K16MCCBU-55BVXI		48-ball Fine Pitch BGA (6 mm × 8mm × 1.0 mm) (Pb-Free)	
60	CYK256K16MCCBU-60BVI	51-85150	48-ball Fine Pitch BGA (6 mm × 8mm × 1.0 mm)	Industrial
70	CYK256K16MCCBU-70BVI	51-85150	48-ball Fine Pitch BGA (6 mm × 8mm × 1.0 mm)	Industrial
	CYK256K16MCCBU-70BVXI		48-ball Fine Pitch BGA (6 mm × 8mm × 1.0 mm) (Pb-Free)	

Note:

20. H = Logic HIGH, L = Logic LOW, X = Don't Care.

Package Diagram

48-ball VFBGA (6 x 8 x 1 mm) (51-85150)

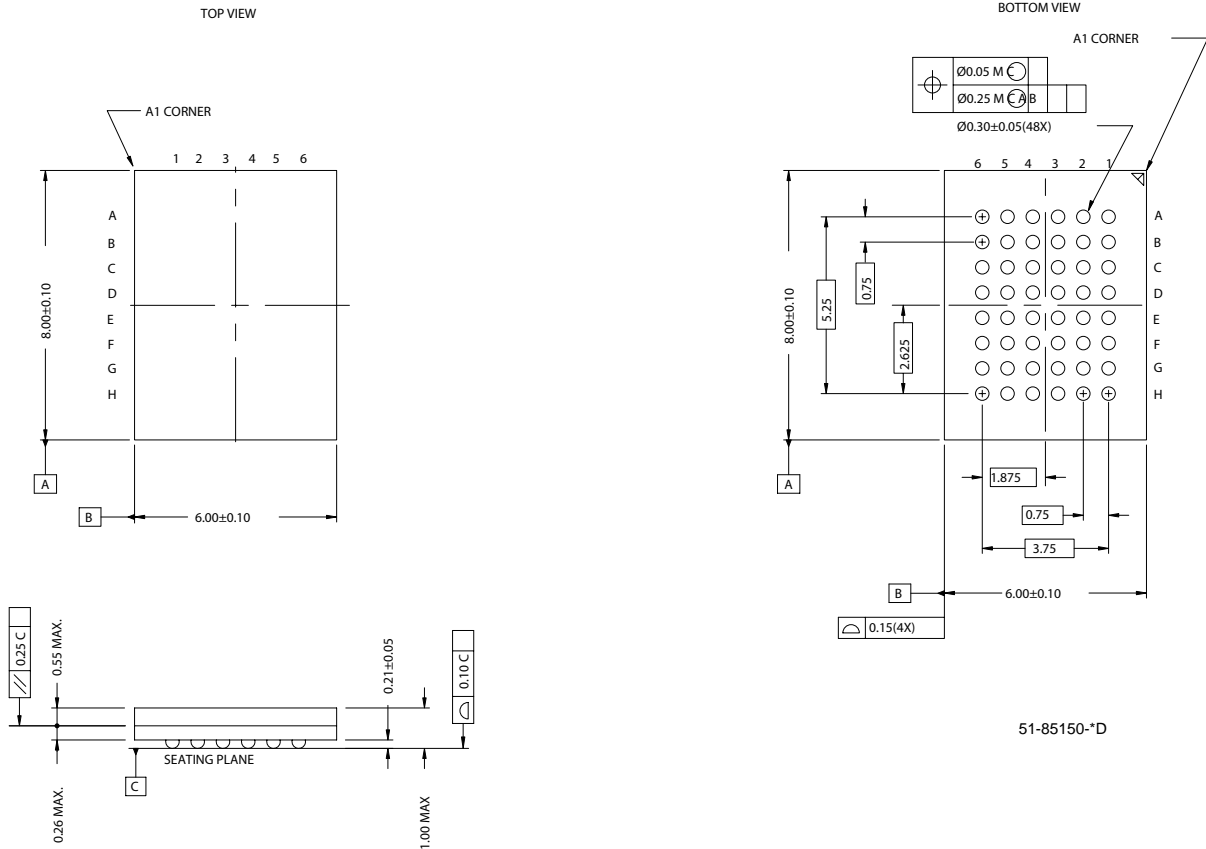

51-85150-*D

MoBL is a registered trademark, and More Battery Life and MoBL3 are trademarks, of Cypress Semiconductor Corporation. All product and company names mentioned in this document may be the trademarks of their respective holders.



CYK256K16MCCB
MoBL3™

Document History Page

Document Title: CYK256K16MCCB MoBL3™4-Mbit (256K x 16) Pseudo Static RAM				
Document Number: 38-05585				
REV.	ECN NO.	Issue Date	Orig. of Change	Description of Change
**	223482	See ECN	REF	New data sheet
*A	234474	See ECN	SYT	Changed ball E3 on package pinout from NC to DNU
*B	260330	See ECN	PCI	Changed from preliminary to final
*C	298651	See ECN	PCI	Added 60-ns speed bin
*D	314013	See ECN	RKF	Added Pb-Free parts to the Ordering information
*E	397852	See ECN	SYT	Changed address of Cypress Semiconductor Corporation on Page# 1 from "3901 North First Street" to "198 Champion Court" Changed typo in ordering code from CYK256K16MCCB to CYK256K16MCCBU in the "Ordering Information" on Page#8 Updated the revision of package diagram of Spec 51-85150 from *B to *D
*F	522566	See ECN	NXR	Changed V _{IL} Max spec from 0.4 V to 0.6 V in DC Electrical Characteristics table