

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[STMicroelectronics](#)

[ST1S03PMR](#)

For any questions, you can email us directly:

sales@integrated-circuit.com




ST1S03

1.5A, 1.5 MHz adjustable, step-down switching regulator in DFN6

Features

- Step-down current mode PWM (1.5MHz) DC-DC converter
- 2% DC output voltage tolerance
- Internal soft start for START-UP current limitation and power on delay of 50-100µs
- Typical efficiency: > 70% over all operating conditions
- 1.5A Output current capability
- Not switching quiescent current: max 2.5mA over temperature range
- Switch V_{DS} : max 350mV @ $I_{SW}=750mA$
- Uses tiny capacitors and inductors
- Available in DFN 3x3 exposed pad

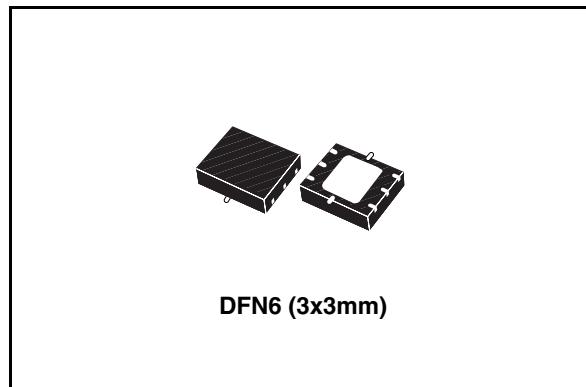

over an input voltage range of 3V to 16V. An high switching frequency (1.5MHz) allows the use of tiny surface-mount components: as well as the resistor divider to set the output voltage value, only an inductor, a schottky diode and two capacitors are required. Besides, a low output ripple is guaranteed by the current mode PWM topology and by the use of low E.S.R. SMD ceramic capacitors. The device is thermal protected and current limited to prevent damages due to accidental short circuit. The ST1S03 is available in DFN6.

Description

The ST1S03 is a step down DC-DC converter optimized for powering low-voltage digital core in HDD applications and, generally, to replace the high current linear solution when the power dissipation may cause an high heating of the application environment. It provides up to 1.5A

Order codes

| Part number | Packaging | Package |
|-------------|-----------|----------------|
| ST1S03PM | ST1S03PMR | DFN6 (3x3 mm) |
| ST1S03PU | ST1S03PUR | DFN6D (3x3 mm) |

Contents


| | | |
|----------|--|-----------|
| 1 | Diagram | 3 |
| 2 | Pin configuration | 4 |
| 3 | Maximum ratings | 5 |
| 4 | Electrical characteristics | 6 |
| 5 | Application notes | 7 |
| 6 | Typical application | 8 |
| 7 | Typical performance characteristics | 9 |
| 8 | Package mechanical data | 12 |
| 9 | Revision history | 16 |

ST1S03

Diagram

1 Diagram

Figure 1. Schematic diagram

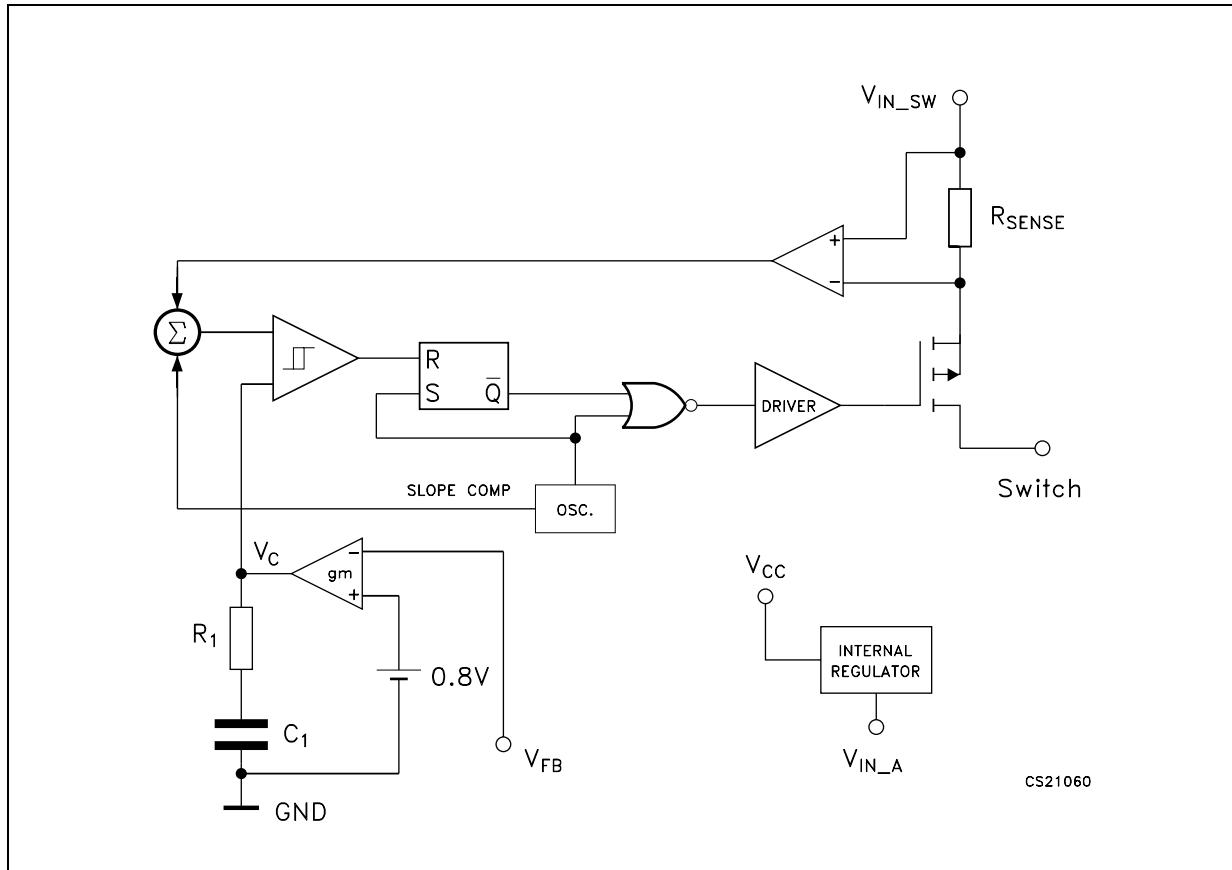

Pin configuration

ST1S03

2 Pin configuration

Figure 2. Pin connections (top view)

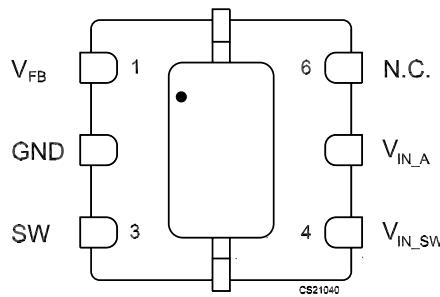


Table 1. Pin description

| Pin N° | Symbol | Name and function |
|--------|--------------------|-------------------------------------|
| 1 | V _{FB} | Voltage of Feedback |
| 2 | GND | System Ground |
| 3 | SW | Output of the internal Power Switch |
| 4 | V _{IN_SW} | Power Supply for the MOSFET Switch |
| 5 | V _{IN_A} | Power Supply for the Analog Circuit |
| 6 | N.C. | Not Connected |

ST1S03

Maximum ratings

3 Maximum ratings

Table 2. Absolute maximum ratings

| Symbol | Parameter | Value | Unit |
|----------------|--------------------------------------|------------|------|
| V_{I_SW} | Positive Power Supply Voltage | -0.3 to 16 | V |
| V_{I_SW} | Positive Power Supply Voltage | -0.3 to 16 | V |
| SWITCH Voltage | Max Voltage of output pin | -0.3 to 16 | V |
| V_{FB} | Feedback Voltage | 2.5 | V |
| I_{VFB} | Common mode input voltage | ± 1 | mA |
| T_J | Max Junction Temperature | 150 | °C |
| T_{STG} | Storage Temperature Range | -25 to 150 | °C |
| T_{LEAD} | Lead Temperature (Soldering) 10 Sec. | 300 | °C |

Note: *Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional Operation under these conditions is not implied.*

Table 3. Thermal data

| Symbol | Parameter | Value | Unit |
|------------|-------------------------------------|-------|------|
| R_{thJC} | Thermal resistance junction-case | 10 | °C/W |
| R_{thJA} | Thermal resistance junction-ambient | 55 | °C/W |

Electrical characteristics

ST1S03

4 Electrical characteristics

Table 4. Electrical characteristics ($V_{IN_SW} = V_{IN_A} = 5V$, $C_I = 4.7\mu F$, $C_O = 22\mu F$, $L1 = 3.3\mu H$, $T_J = 0$ to $125^\circ C$, unless otherwise specified. Typical values are referred to $25^\circ C$)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------------|---|--|------|--------|-------|-----------------------|
| FB | Feedback voltage | | 784 | 800 | 816 | mV |
| PSRR | Feedback PSRR | 1Hz < Frequency V_{IN} | | -60 | | dB |
| I_{FB} | V_{FB} Pin bias current | | | | 600 | nA |
| BW | Bandwidth of error amplifier | Closed Loop | | 300 | | KHz |
| I_Q | Quiescent current | No Switching | | | 2.5 | mA |
| I_O | Output current | $V_{IN} = 3V$ to $16V$ | 1.5 | | | A |
| I_{MIN} | Minimum output current | | 1 | | | mA |
| $\%V_O/\Delta V_{IN}$ | Reference line regulation | $V_{IN} = 3V$ to $16V$ | | 0.032 | 0.06 | $\%V_O/\Delta V_{IN}$ |
| $\%V_O/\Delta I_O$ | Reference load regulation | $I_O = 10mA$ to $1.2A$ | | 0.0014 | 0.003 | $\%V_O/\Delta I_O$ |
| $PWM f_S$ | PWM Switching frequency ⁽¹⁾ | $V_{FB} = 0.8V$, $T_A = 25^\circ C$ | 1.2 | 1.5 | 1.8 | MHz |
| D_{MAX} | Maximum duty cycle | | | 87 | | % |
| I_{SWL} | Switching current limitation | | 1.65 | | | A |
| V_{DS} | Switch V_{DS} | $I_{SW} = 750\text{ mA}$ | | 200 | 350 | mV |
| E | Efficiency | $I_O = 10mA$ to $1.2A$ | 70 | | | % |
| T_{SHDN} | Thermal shut down ⁽¹⁾ | | 130 | 150 | | $^\circ C$ |
| T_{HYS} | Thermal shut down hysteresis ⁽¹⁾ | | | 15 | | $^\circ C$ |
| $\Delta V_O/\Delta I_O$ | Load transient response ⁽¹⁾ | $I_O = 100mA$ to $700mA$ $t_R = t_F \geq 100\text{ns}$, $T_A = 25^\circ C$ | -5 | | +5 | $\%V_O/\Delta I_O$ |
| $\Delta V_O/\Delta I_O @ I_O=short$ | Short circuit removal response ⁽¹⁾ | $I_O = 10mA$ to short, $T_A = 25^\circ C$ | | | +5 | $\%V_O/\Delta I_O$ |

1. Guaranteed by design, but not tested in production.

5 Application notes

The ST1S03 is an adjustable current mode PWM step-down DC/DC converter with internal 1.5A power switch, packaged in 6-lead DFN 3x3.

It's a complete 1.5A switching regulator with its internal compensation eliminating additional component.


The constant frequency, current mode, PWM architecture and stable operation with ceramic capacitors results in low, predictable output ripple. However, in order to keep the output regulated, the device goes in pulse skipping mode when a very light load is required.

To clamp the error amplifier reference voltage a Soft Start control block generating a voltage ramp, has been implemented. Besides an On-Chip Power on Reset of $50 = 100\mu s$ ensure the proper operation when switching on the power supply. Other circuits fitted to the device protection are the Thermal Shut down block which turns off the regulator when the junction temperature exceeds $150^{\circ}C$ typically and the Cycle-by-cycle Current Limiting that provides protection against shorted outputs.

Being the ST1S03 an adjustable regulator, the output voltage is determined by an external resistor divider. The desired value is given by the following equation:

$$V_O = V_{FB} [1 + R1/R2]$$

To make the device work, only other four external components are required: a Schottky diode, an inductor and two capacitors. The chosen inductor must be able to not saturate at the peak current level. Besides, its value can be selected keeping in account that a large inductor value increases the efficiency at low output current and reduces output voltage ripple, while a smaller inductor can be chosen when it is important to reduce the package size and the total cost of the application. Finally, the ST1S03 has been designed to work properly with X5R or X7R SMD ceramic capacitors both at the input and at the output. This kind of capacitors, thanks to their very low series resistance (ESR), minimize the output voltage ripple. Other low ESR capacitors can be used according to the need of the application without invalidating the right functioning of the device. Due to the high switching frequency and peak current, it is important to optimize the application environment reducing the length of the PCB traces and placing all the external component near the device.

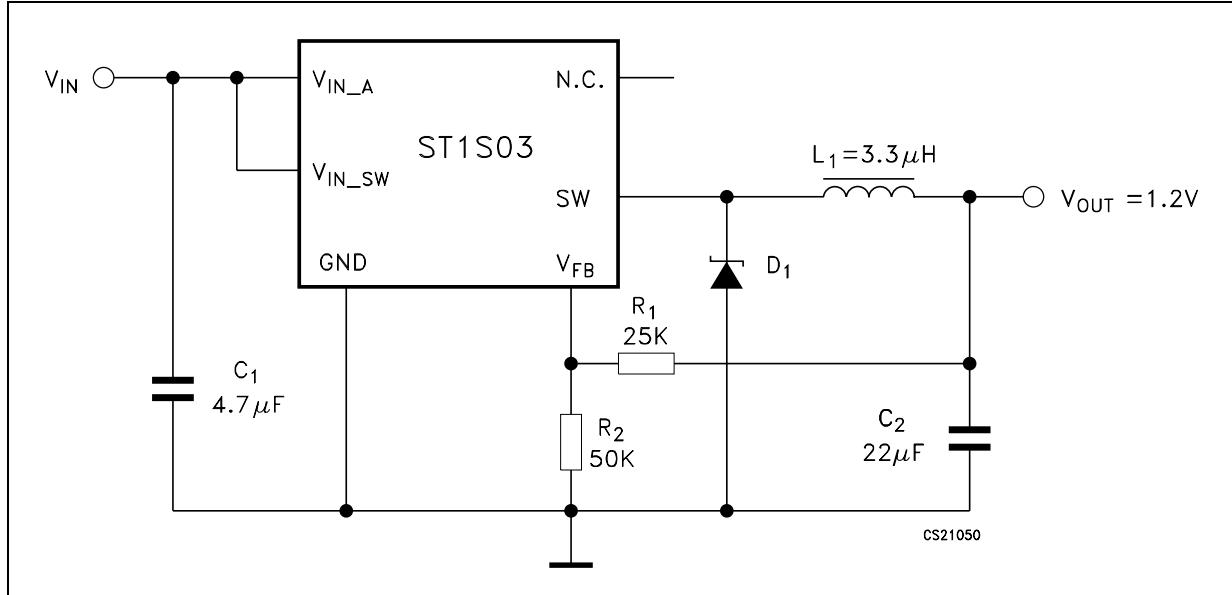Typical application**ST1S03****6 Typical application****Figure 3. Application circuits**

ST1S03

Typical performance characteristics

7 Typical performance characteristics

($L_1=3.3\mu H$, $C_I = 4.7\mu F$, $C_O = 22\mu F$, unless otherwise specified)

Figure 4. Load voltage feedback vs temp.

Figure 5. Voltage feedback vs temperature

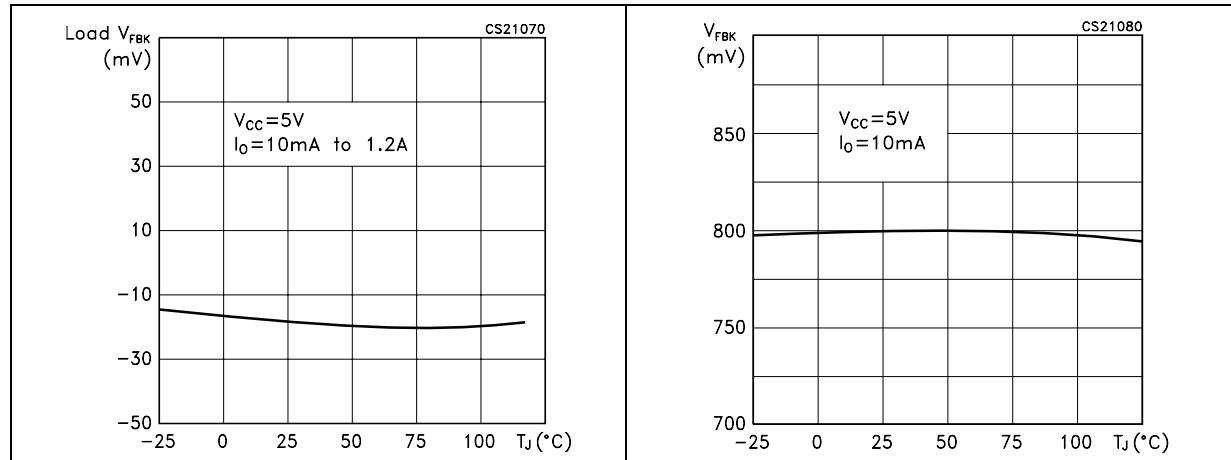


Figure 6. Line output voltage regulation vs temperature

Figure 7. Line voltage feedback vs temperature


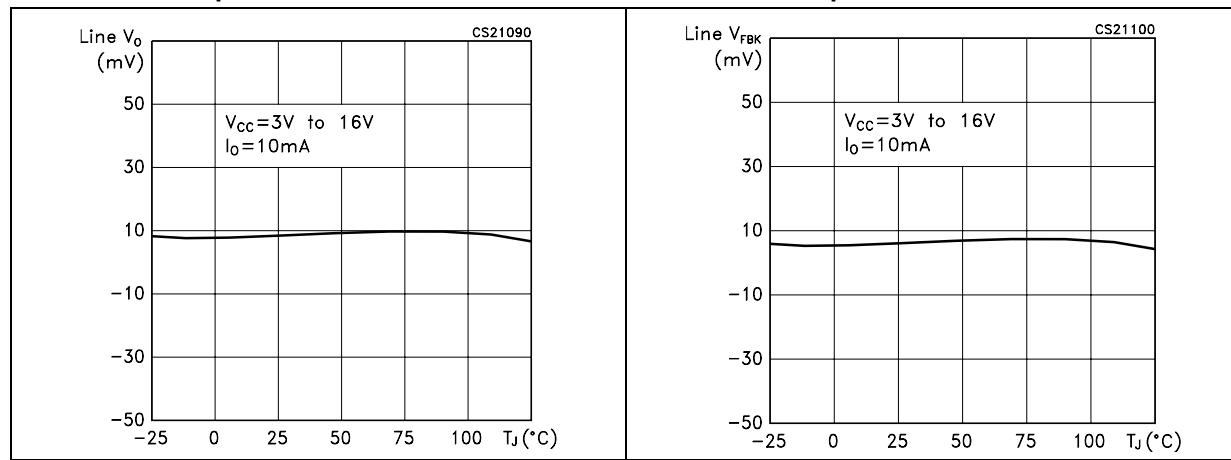


Figure 8. Voltage feedback vs output current

Figure 9. PWM Switching frequency vs temperature

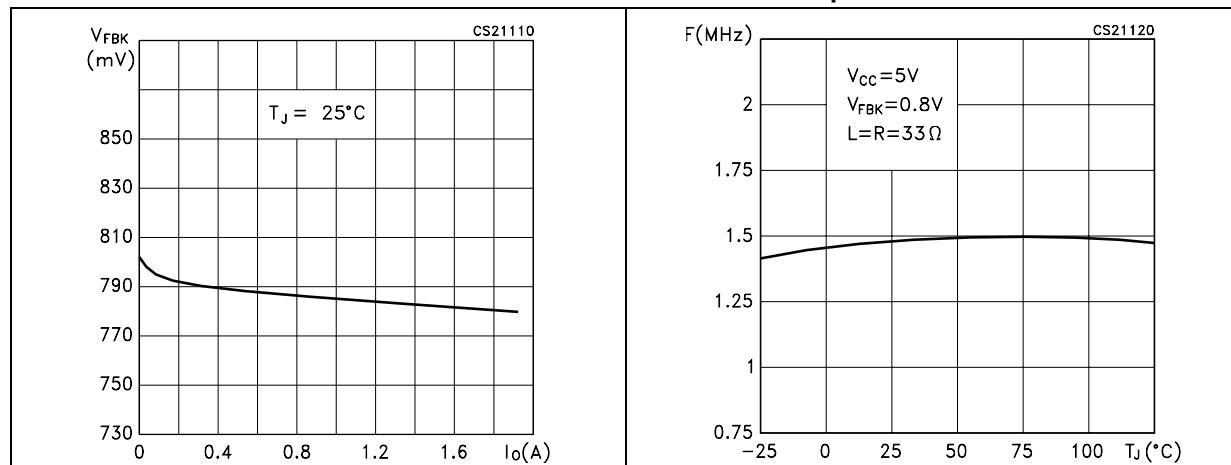

Typical performance characteristics

ST1S03

Figure 10. Quiescent current vs temperature

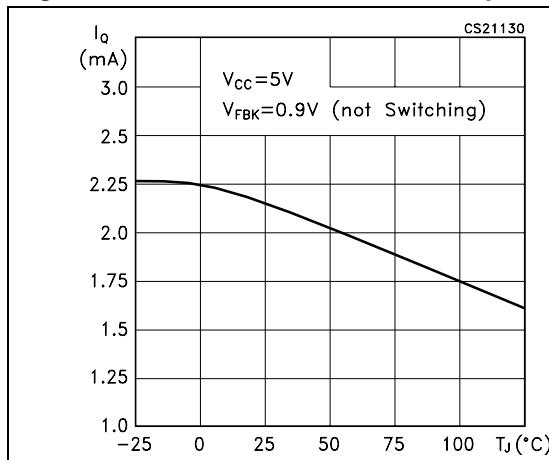


Figure 11. Quiescent current vs input voltage

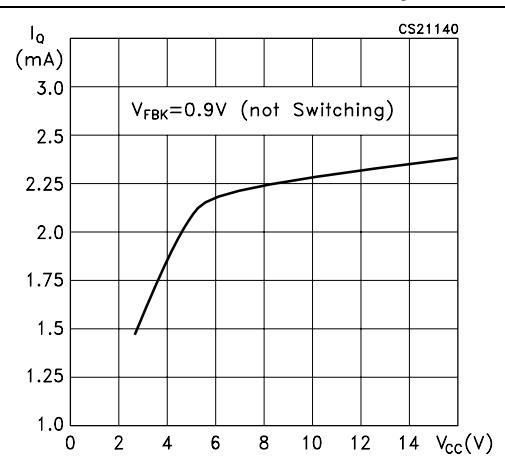


Figure 12. Minimum operating voltage vs output voltage

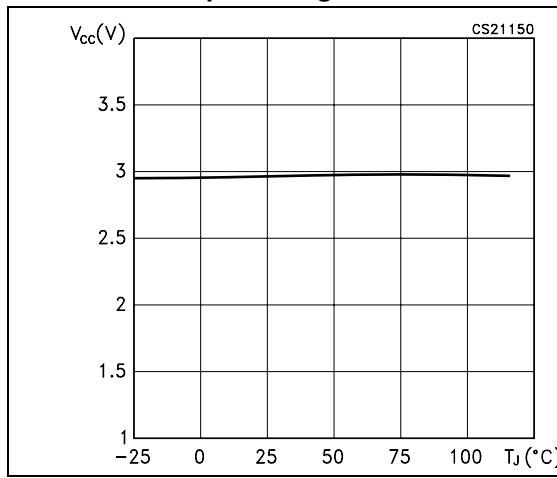


Figure 13. Efficiency vs temperature

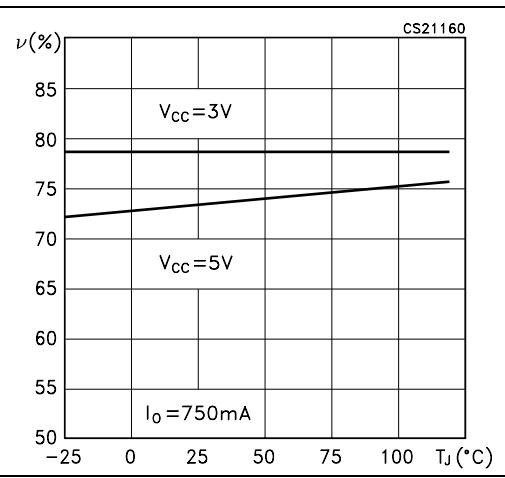


Figure 14. Efficiency vs output current


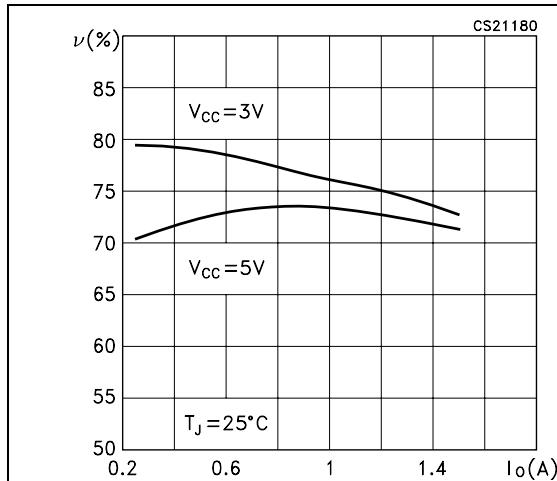


Figure 15. Switch VDS vs temperature

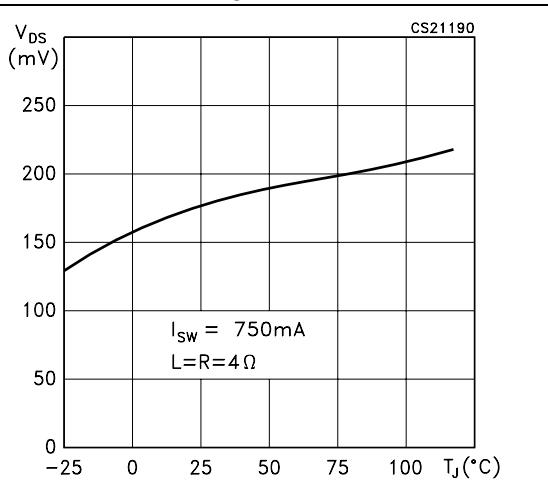

ST1S03

Typical performance characteristics

Figure 16. Switch RDS-ON vs temperature

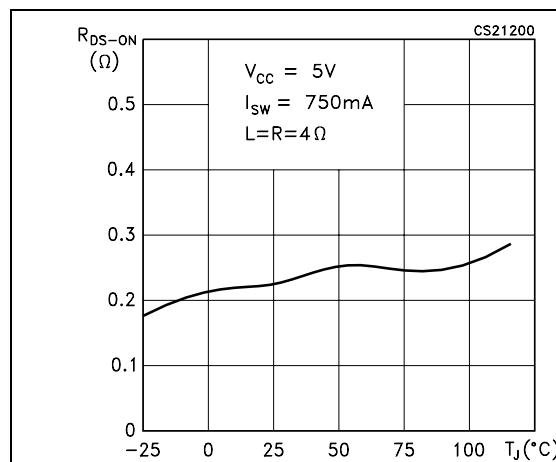


Figure 17. Switch current limitation vs temperature



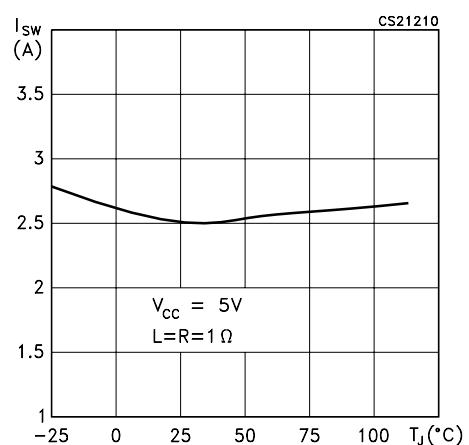


Figure 18. Load transient response

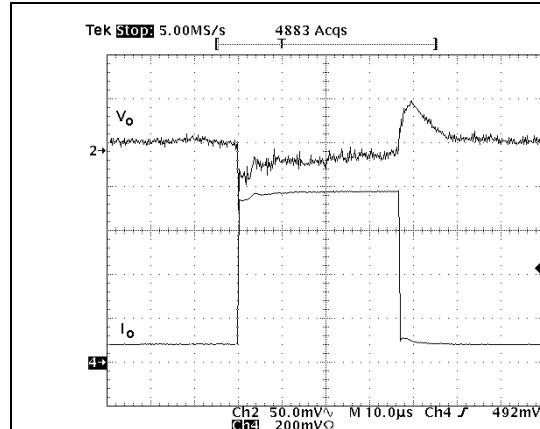


$V_{CC}=5V$, $I_o=100mA$ to $780mA$, $C_l=4.7\mu F$, $C_o=22\mu F$, $L=3.3\mu H$, $T_{ON}=38\mu s$, $T_J=25^\circ C$

Figure 19. Load transient response

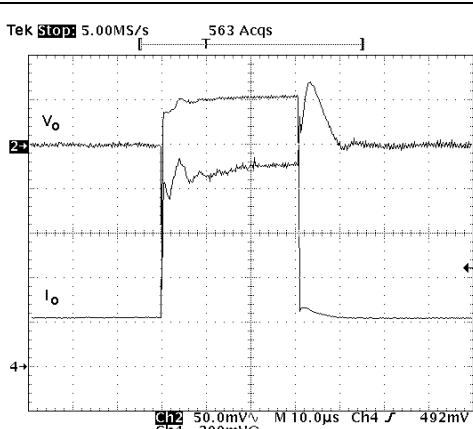


$V_{CC}=5V$, $I_o=200mA$ to $1.2A$, $C_l=4.7\mu F$, $C_o=22\mu F$, $L=3.3\mu H$, $T_{ON}=38\mu s$, $T_J=25^\circ C$

Figure 20. Start-Up transient

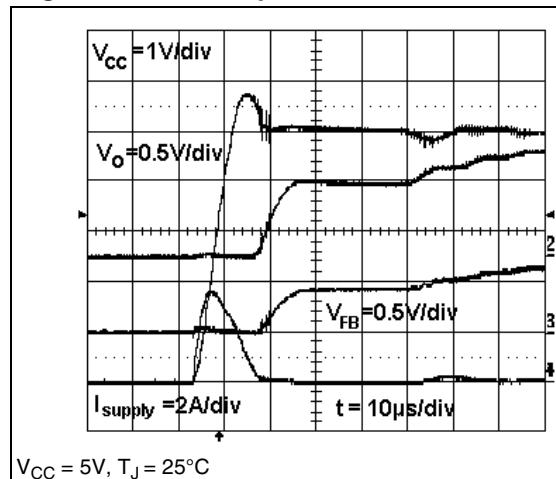

$V_{CC}=5V$, $T_J=25^\circ C$

Figure 21. Start-Up transient

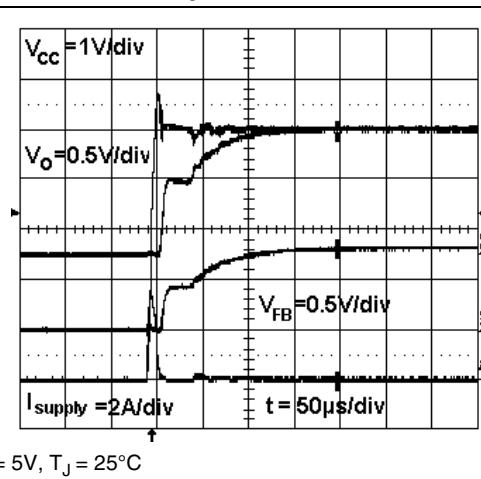

$V_{CC}=5V$, $T_J=25^\circ C$

Package mechanical data**ST1S03****8 Package mechanical data**


In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a Lead-free second level interconnect. The category of second Level Interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: www.st.com.

ST1S03

Package mechanical data

DFN6 (3x3) MECHANICAL DATA

| DIM. | mm. | | | inch. | | |
|------|------|------|------|-------|-------|-------|
| | MIN. | TYP | MAX. | MIN. | TYP. | MAX. |
| A | 0.80 | | 1.00 | 0.031 | | 0.039 |
| A1 | 0 | | 0.05 | 0.0 | | 0.02 |
| A2 | 0.65 | | 0.75 | 0.026 | | 0.030 |
| A3 | | 0.20 | | | 0.08 | |
| b | 0.33 | | 0.43 | 0.013 | | 0.017 |
| D | 2.90 | 3.00 | 3.10 | 0.114 | 0.118 | 0.122 |
| D2 | 1.92 | | 2.12 | 0.076 | | 0.083 |
| E | 2.90 | 3.00 | 3.10 | 0.114 | 0.118 | 0.122 |
| E2 | 1.11 | | 1.31 | 0.044 | | 0.052 |
| e | | 0.95 | | | 0.037 | |
| L | 0.20 | | 0.45 | 0.008 | | 0.018 |
| L1 | | 0.24 | | | 0.009 | |
| L2 | | | 0.13 | | | 0.005 |
| K | 0.20 | | | 0.008 | | |

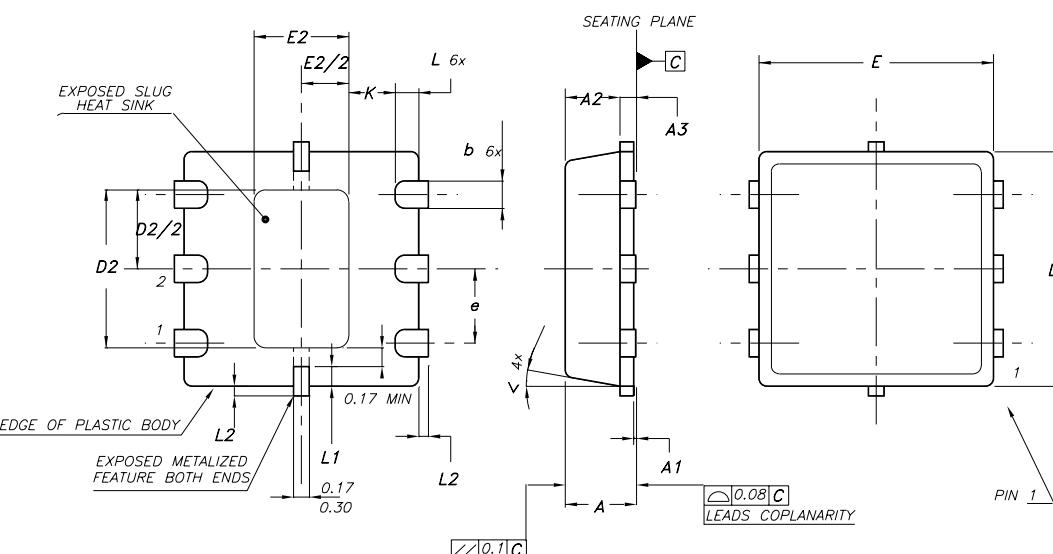


7387339A

Package mechanical data

ST1S03

DFN6D (3x3) MECHANICAL DATA

| DIM. | mm. | | | inch | | |
|------|------|------|------|-------|-------|-------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | 0.80 | | 1.00 | 0.031 | | 0.039 |
| A1 | 0 | 0.02 | 0.05 | 0 | 0.001 | 0.002 |
| A3 | | 0.20 | | | 0.008 | |
| b | 0.23 | | 0.45 | 0.009 | | 0.018 |
| D | 2.90 | 3.00 | 3.10 | 0.114 | 0.118 | 0.122 |
| D2 | 2.23 | | 2.50 | 0.088 | | 0.098 |
| E | 2.90 | 3.00 | 3.10 | 0.114 | 0.118 | 0.122 |
| E2 | 1.50 | | 1.75 | 0.059 | | 0.069 |
| e | | 0.95 | | | 0.037 | |
| L | 0.30 | 0.40 | 0.50 | 0.012 | 0.016 | 0.020 |

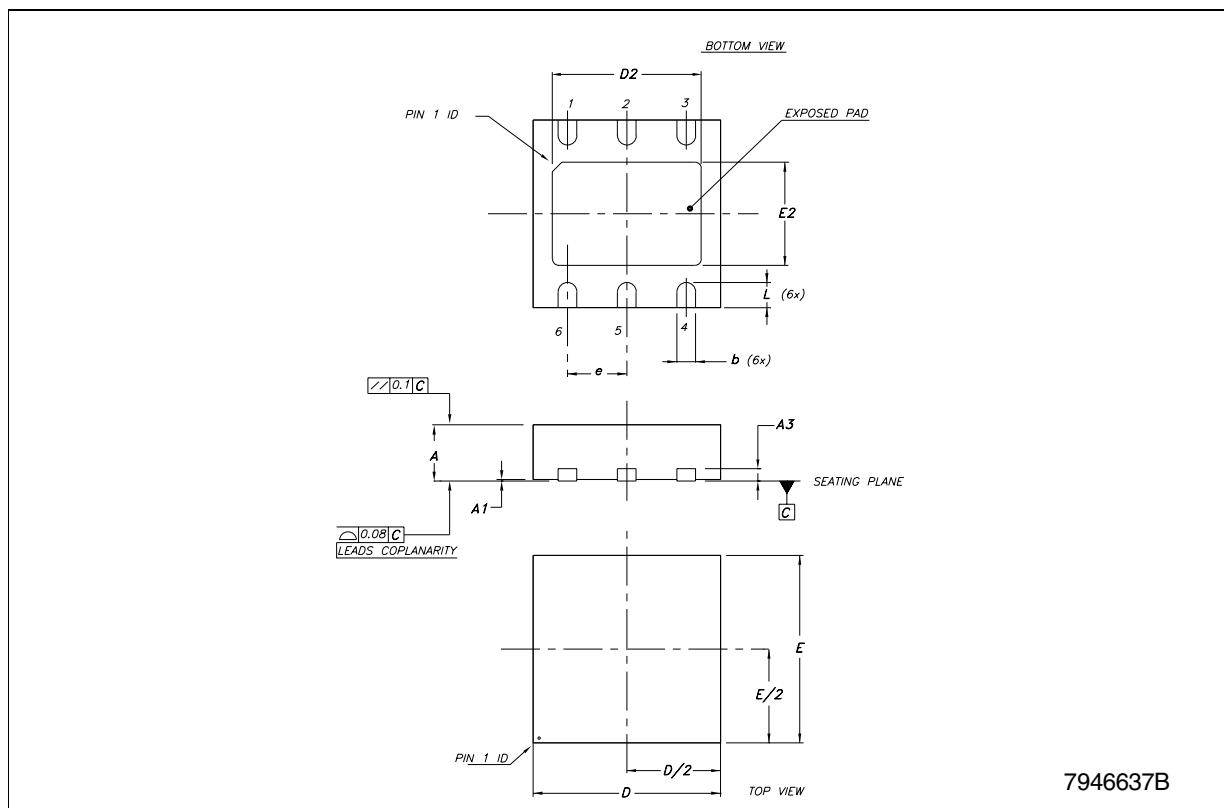


ST1S03

Package mechanical data

Tape & Reel QFN_{xx}/DFN_{xx} (3x3) MECHANICAL DATA

| DIM. | mm. | | | inch | | |
|----------------|------|-----|------|-------|-------|--------|
| | MIN. | TYP | MAX. | MIN. | TYP. | MAX. |
| A | | | 330 | | | 12.992 |
| C | 12.8 | | 13.2 | 0.504 | | 0.519 |
| D | 20.2 | | | 0.795 | | |
| N | 60 | | | 2.362 | | |
| T | | | 18.4 | | | 0.724 |
| A _o | | 3.3 | | | 0.130 | |
| B _o | | 3.3 | | | 0.130 | |
| K _o | | 1.1 | | | 0.043 | |
| P _o | | 4 | | | 0.157 | |
| P | | 8 | | | 0.315 | |

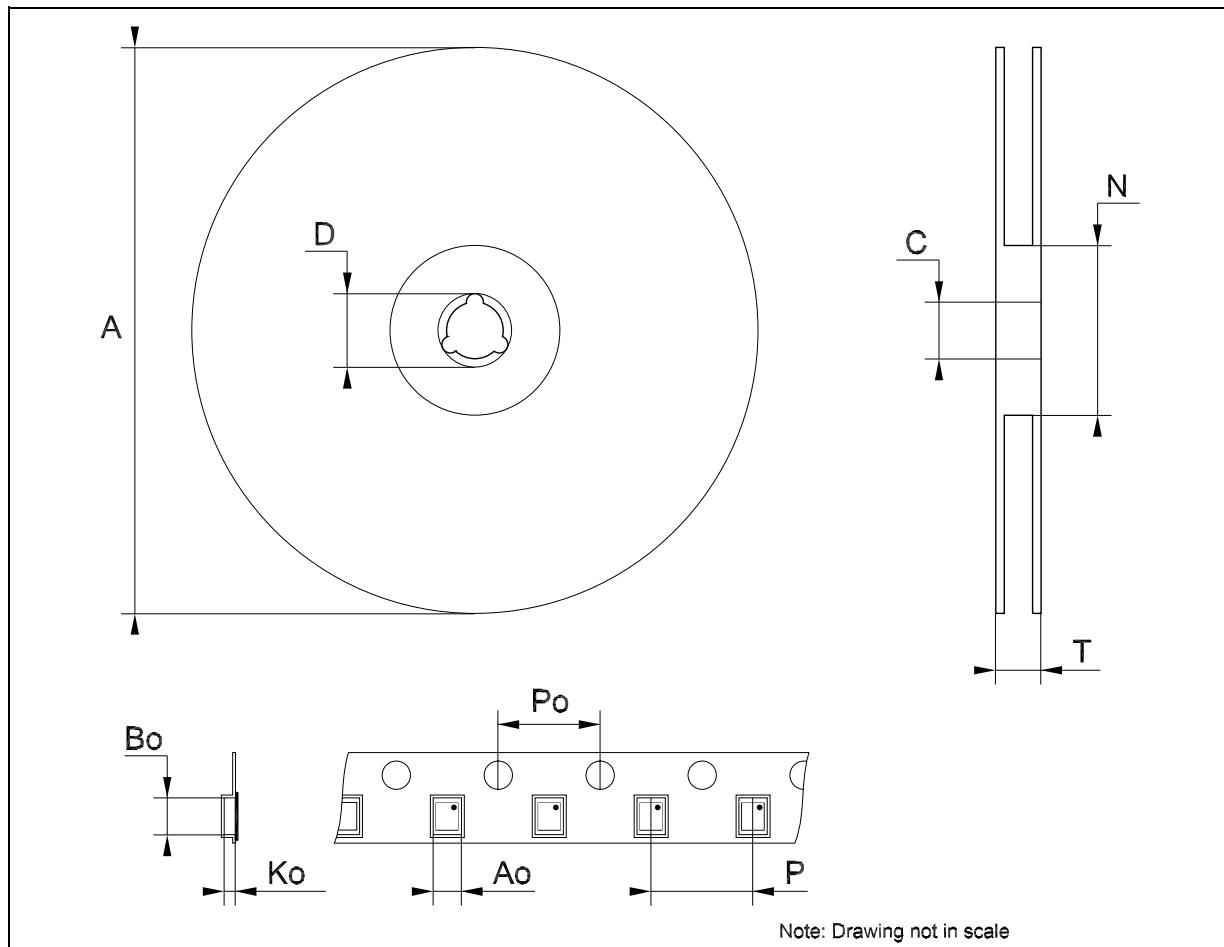

Revision history**ST1S03****9 Revision history****Table 5. Revision history**

| Date | Revision | Changes |
|-------------|----------|--|
| 11-Nov-2004 | 1 | First Release. |
| 08-Feb-2005 | 2 | Maturity Change. |
| 03-Mar-2005 | 3 | Mistake on Figure 1, T_J is changed 125 ==> 150°C on Table 3. |
| 13-Jul-2005 | 4 | Add new package SO-8 exposed pad. |
| 29-Mar-2007 | 5 | Package SO-8 has been removed and the document has been reformatted. |

ST1S03**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2007 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com