

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Atmel](#)
[AT73C203-EK](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

Features

- DC to DC Step Down 1.2 A, 0.9V (Dynamically Adjustable to 0.87V/1.1V/1.2V)
- DC to DC step Down 1.2 A, 1.2V (Dynamically Adjustable to 1.0V/1.1V/1.3V) or 1.75V (Dynamically Adjustable 1.65V/1.70V/1.80V)
- DC to DC Step Down 1.2 A, 1.8V (Dynamically Adjustable to 1.70V/1.75V/1.85V) or 2.5V (Dynamically Adjustable 2.3V/2.4V/2.6V)
- DC to DC Step Up/Down 520 mA, 3.3V (Dynamically Adjustable to 3.0V/3.1V/3.4V)
- Dual Battery Chargers: Li+ Precharge, Fast Charge, Top-up Charge, 4.1V (or Adjustable), Processor Tuned Algorithms
 - USB Trickle Charge: Precharge Flat Battery from USB Pre-enumeration, then Auto-wake of Processor at 3.8V Battery Level
 - Battery Charge Select: 25 mA to 500 mA
 - Real-time Charge Inhibit: Allows Charge Suspend (e.g. During TX Slots)
- Supply Monitor of Four Power Sources: Thermistors, Temperature, DC/DC Rails, all Supplied with Out-of-regulation Threshold Detection
- SIM Interface: SIM / USIM, 1.8V / 3.0V Standards, Integrated TX and RX Data FIFO
- SPI Control Interface: Up to 13 MHz; Tuned for SA1110/PXA250/PXA255 1.2 MHz SPI, 128 8-bit Registers
- Power on Reset: For SA1110/PXA250/PXA255 Architectures plus Additional Sequenced System Level Resets
- Voltage and Temperature Supervision
- Calibrated Voltage Reference
- 8-bit ADC with 5-input Multiplexer
- Integrated Oscillator, Start-up and Self-protection Circuitry
- Off Power: 60 μ A with External “Button Select” for Restart
- Applications Include: PDAs, PCMCIA Cards, SMART Phones, Pocket PCs, 3G Applications, Intel[®] XScale[™] Powered Applications

Description

The AT73C203 device provides an integrated solution to portable and handheld applications built around microprocessors requiring “smart” power management functions, such as PDAs, Palmtop computers, point-of-sales terminals, 3G modems, etc.

Its compact package outline and small size of external components make the AT73C203 suitable for PCMCIA card power management as well.

The AT73C203 integrates a power switch controller that, when connected to an external power switch, may be used for automatically selecting one of four possible power sources:

- Internal battery
- External battery
- Plugtop power supply unit 5V (PSU)
- PC Host USB supply

The power switch output (VDD-PSU line) is connected directly to external auxiliary components such as a radio or any other “current hungry” module.

The AT73C203 is also equipped with four digital rails from VDD-PSU to supply a baseband chip, a reset generator for the baseband chip, and a SPI interface to control the AT73C203 via an internal register set. The USIM interface allows the application processor to communicate with and control a USIM card. Charge control enables the application processor to charge the battery from the PSU or USB. A state machine can also determine whether to charge the internal battery through USB at start-up. Additionally, hardware monitoring gives information to the application processor when a voltage drop occurs (programmed via internal registers).



Power Management

AT73C203 Power Management IC for Datacom Platforms

Summary

2742BS-PMGMT-03/04




Note: This is a summary document. A complete document is available on our Web site at www.atmel.com.



Functional Diagram

Figure 1. AT73C203 Functional Diagram

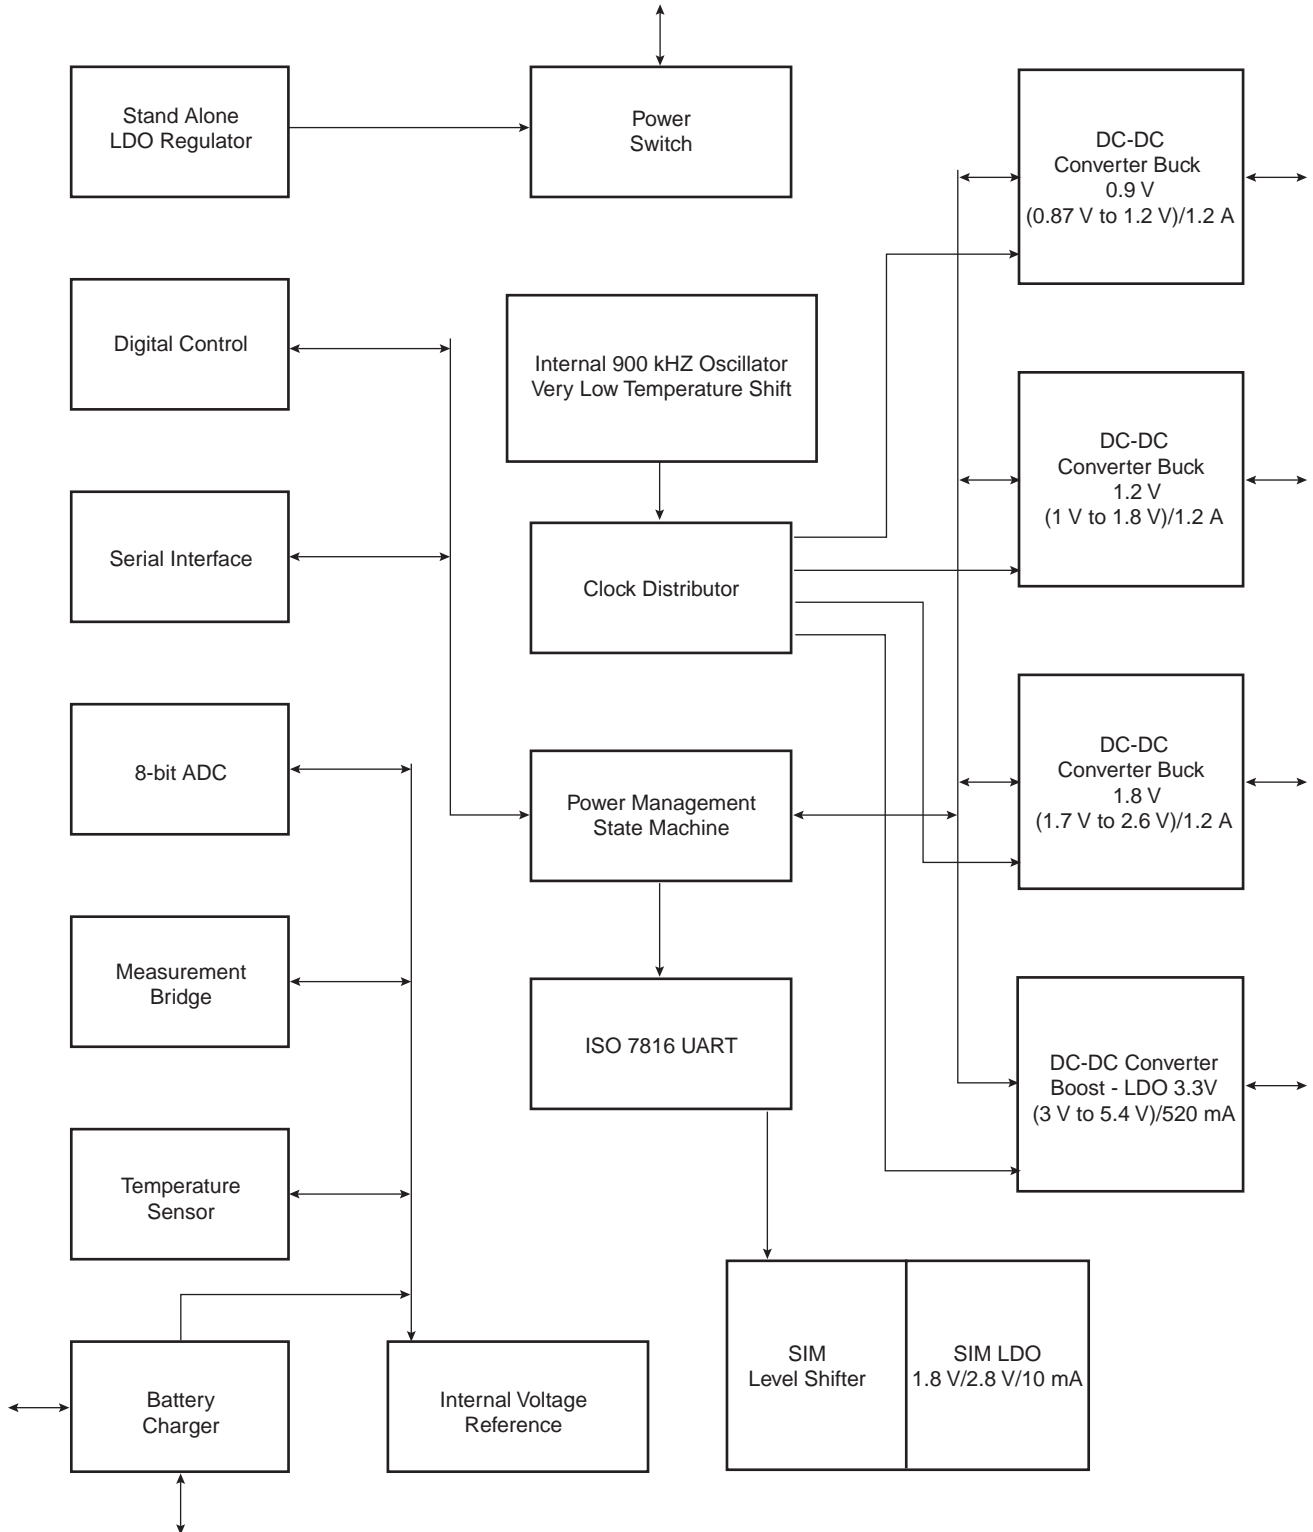



Atmel Corporation

2325 Orchard Parkway
 San Jose, CA 95131, USA
 Tel: 1(408) 441-0311
 Fax: 1(408) 487-2600

Regional Headquarters

Europe

Atmel Sarl
 Route des Arsenaux 41
 Case Postale 80
 CH-1705 Fribourg
 Switzerland
 Tel: (41) 26-426-5555
 Fax: (41) 26-426-5500

Asia

Room 1219
 Chinachem Golden Plaza
 77 Mody Road Tsimshatsui
 East Kowloon
 Hong Kong
 Tel: (852) 2721-9778
 Fax: (852) 2722-1369

Japan

9F, Tonetsu Shinkawa Bldg.
 1-24-8 Shinkawa
 Chuo-ku, Tokyo 104-0033
 Japan
 Tel: (81) 3-3523-3551
 Fax: (81) 3-3523-7581

Atmel Operations

Memory

2325 Orchard Parkway
 San Jose, CA 95131, USA
 Tel: 1(408) 441-0311
 Fax: 1(408) 436-4314

Microcontrollers

2325 Orchard Parkway
 San Jose, CA 95131, USA
 Tel: 1(408) 441-0311
 Fax: 1(408) 436-4314

La Chantrerie
 BP 70602
 44306 Nantes Cedex 3, France
 Tel: (33) 2-40-18-18-18
 Fax: (33) 2-40-18-19-60

ASIC/ASSP/Smart Cards

Zone Industrielle
 13106 Rousset Cedex, France
 Tel: (33) 4-42-53-60-00
 Fax: (33) 4-42-53-60-01

1150 East Cheyenne Mtn. Blvd.
 Colorado Springs, CO 80906, USA
 Tel: 1(719) 576-3300
 Fax: 1(719) 540-1759

Scottish Enterprise Technology Park
 Maxwell Building
 East Kilbride G75 0QR, Scotland
 Tel: (44) 1355-803-000
 Fax: (44) 1355-242-743

RF/Automotive

Theresienstrasse 2
 Postfach 3535
 74025 Heilbronn, Germany
 Tel: (49) 71-31-67-0
 Fax: (49) 71-31-67-2340

1150 East Cheyenne Mtn. Blvd.
 Colorado Springs, CO 80906, USA
 Tel: 1(719) 576-3300
 Fax: 1(719) 540-1759

Biometrics/Imaging/Hi-Rel MPU/ High Speed Converters/RF Datacom

Avenue de Rochepleine
 BP 123
 38521 Saint-Egreve Cedex, France
 Tel: (33) 4-76-58-30-00
 Fax: (33) 4-76-58-34-80

Literature Requests

www.atmel.com/literature

Disclaimer: Atmel Corporation makes no warranty for the use of its products, other than those expressly contained in the Company's standard warranty which is detailed in Atmel's Terms and Conditions located on the Company's web site. The Company assumes no responsibility for any errors which may appear in this document, reserves the right to change devices or specifications detailed herein at any time without notice, and does not make any commitment to update the information contained herein. No licenses to patents or other intellectual property of Atmel are granted by the Company in connection with the sale of Atmel products, expressly or by implication. Atmel's products are not authorized for use as critical components in life support devices or systems.

© Atmel Corporation 2004. All rights reserved. Atmel® and combinations thereof are the registered trademarks of Atmel Corporation or its subsidiaries. Intel® is the registered trademark of Intel Corporation, XSCALE™ is the trademark of Intel Corporation. Other terms and product names may be the trademarks of others.



Printed on recycled paper.