



Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[NorComp](#)
[810-002-LP1R006](#)


For any questions, you can email us directly:
sales@integrated-circuit.com

DESCRIPTION: 2MM SHUNT LOW PROFILE, .075" TIN/LEAD

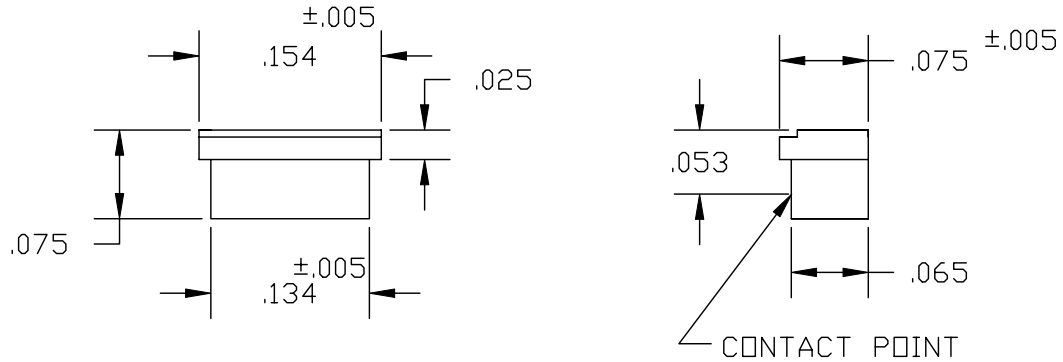

MATERIAL: HOUSING: GLASS FILLED THERMOPLASTIC, UL 94V-0, BLACK- 260°C PROCESS TEMP.
 CONTACT: HIGH PERFORMANCE COPPER ALLOY
PLATING: TIN/LEAD ALL OVER
 RoHS COMPLIANT

ELECTRICALS: CURRENT RATING: 1.0 AMPERE MAX.
 CONTACT RESISTANCE: 30 MILLIOHM MAX.
 DMV: 500 Vrms MIN.
 INSULATION RESISTANCE: 1×10^4 MOHMS
 OPERATING TEMP: -55°C TO 105°C

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: PAM JENKINS	DATE: 12-13-01
			CHECKED:	DATE:
NorComp	SCALE:	SHEET 1	OF 1	REV 1
	DWG NO. 810-002-LP1R006			