

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Diodes Incorporated](#)
[AP2004SG-13](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



AP2004

PWM BUCK CONTROLLER

Features

- PWM Buck Control Circuitry
- Operating voltage can be up to 27V
- Under voltage Lockout (UVLO) Protection
- Short Circuit Protection (SCP)
- Soft-start circuit
- Variable Oscillator Frequency -- 300Khz Max
- 1.25V voltage reference Output
- 8-pin SOP package
- SOP-8L: Available in "Green" Molding Compound (No Br, Sb)
- Lead Free Finish/ RoHS Compliant (Note 1)


General Description

The AP2004 integrates Pulse-Width-Modulation (PWM) control circuit into a single chip, mainly designs for power-supply regulator. All the functions include an on-chip 1.25V reference output, an error amplifier, an adjustable oscillator, a soft-start, UVLO, SCP circuitry, and a push-pull output circuit. Switching frequency is adjustable by trimming CT. During low VCC situation, the UVLO makes sure that the outputs are off until the internal circuit operates normally.

Applications

- Backlight inverter
- LCD Monitor
- CDROM, XDSL Product
- DC/DC converters in computers, etc.

Ordering Information

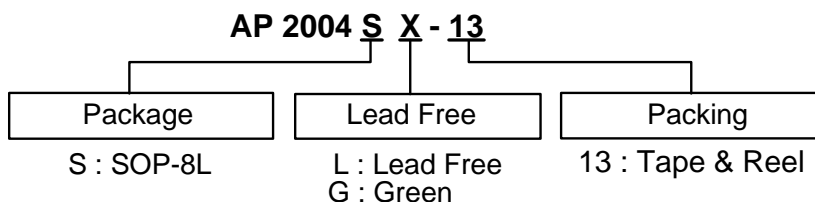

Device	Package Code	Packaging (Note 2)	13" Tape and Reel	
			Quantity	Part Number Suffix
AP2004SL-13	S	SOP-8L	2500/Tape & Reel	-13
AP2004SG-13	S	SOP-8L	2500/Tape & Reel	-13




- Notes:
1. EU Directive 2002/95/EC (RoHS). All applicable RoHS exemptions applied. Please visit our website at http://www.diodes.com/products/lead_free.html.
 2. Pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.



AP2004
PWM BUCK CONTROLLER

Pin Assignments

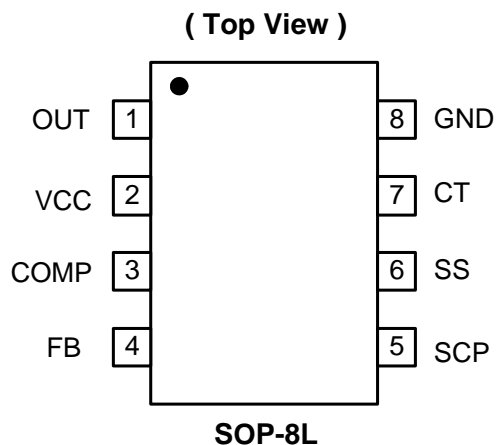

Pin Descriptions


Pin Name	Description
CT	Timing Capacitor
FB	Voltage Feedback
SS	Soft-Start.
COMP	Feedback Loop Compensation
OUT	PWM Output
GND	Ground
VCC	Supply Voltage
SCP	Short Circuit Protection



AP2004

PWM BUCK CONTROLLER

Block Diagram

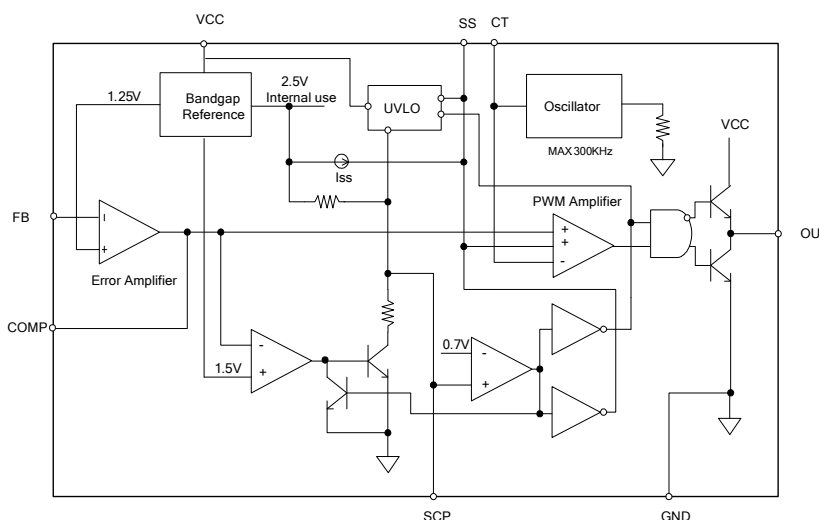

Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit
P_D	Power dissipation at 25°C	600	mW
V_{CC}	Supply voltage	28	V
V_I	Amplifier input voltage	20	V
V_O	Collector output voltage	$V_{CC}-1.0V$	V
I_{SOURCE}	Source current	200	mA
I_{SINK}	Sink current	200	mA
T_{OP}	Operating junction temperature range	-20 to +125	°C
T_{ST}	Storage temperature range	-65 to +150	°C

Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
V_{CC}	Supply voltage	3.6	27	V
V_I	Amplifier input voltage	1.05	1.45	V
V_O	Collector output voltage		$V_{CC}-1.5$	V
I_{FB}	Current into feedback terminal		45	μA
R_F	Feedback resistor	100		kΩ
C_T	Timing capacitor	100	6800	pF
F_{OSC}	Oscillator frequency	10	300	KHz



AP2004

PWM BUCK CONTROLLER

Electrical Characteristics (T_A = 25°C, V_{CC} = 6V, f = 200 KHz)

Reference (REF)

Symbol	Parameter	Conditions	Min	Typ.	Max	Unit
V _{REF}	Comp connect to FB		1.225	1.25	1.275	V
	Output voltage change with temperature	T _A = -20°C ~ 25°C		-0.1	±1	%
		T _A = 25°C ~ 85°C		-0.2	±1	%

Under voltage lockout (UVLO)

Symbol	Parameter	Conditions	Min	Typ.	Max	Unit	
V _{UT}	Upper threshold voltage (V _{CC})	I _{O(REF)} = 0.1mA T _A = 25°C		2.9		V	
V _{LWT}	Lower threshold voltage (V _{CC})				2.4		V
V _{HT}	Hysteresis (V _{CC})				500		mV

Short-circuit protection (SCP) control

Symbol	Parameter	Conditions	Min	Typ.	Max	Unit
V _{IT}	Input threshold voltage	T _A = 25°C	0.60	0.67	0.75	V
V _{STB}	Standby voltage	No pull up	100	130	160	mV
V _{LT}	Latched input voltage	No pull up		50	100	mV
I _{SCP}	Input (source) current	V _I = 0.7V, T _A = 25°C	-10	-15	-20	µA
V _{CT}	Comparator threshold voltage (COMP)			1.5		V

Oscillator (OSC)

Symbol	Parameter	Conditions	Min	Typ.	Max	Unit
F _{OSC}	Frequency	C _T = 270 pF		200		KHz
ΔF _{OSC}	Standard deviation of frequency	C _T = 270 pF		10		%
	Frequency change with voltage	V _{CC} = 3.6V ~ 20V		1		

Error-amplifier

Symbol	Parameter	Conditions	Min	Typ.	Max	Unit
V _{IO}	Input offset voltage	V _O (FB) = 1.25V			±6	mV
I _{IO}	Input offset current	V _O (FB) = 1.25V			±100	nA
I _{IB}	Input bias current	V _O (FB) = 1.25V		160	500	nA
V _{CM}	Common-mode input voltage range	V _{CC} = 3.6V ~ 20V	1.05		1.45	V
AV	Open-loop voltage amplification	R _F = 200 kΩ	70	80		dB
GBW	Unity-gain bandwidth			1.5		MHz
CMRR	Common-mode rejection ratio		60	80		dB
V _{OH}	Max. output voltage		V _{ref} -0.1			V
V _{OL}	Min. output voltage				1	V
I _{OI}	Output (sink) current (COMP)	V _{ID} = -0.1V, V _O = 1.25V	0.5	1.6		mA
I _{OO}	Output (source) current (COMP)	V _{ID} = 0.1V, V _O = 1.25V	-45	-70		µA



AP2004

PWM BUCK CONTROLLER

Electrical Characteristics (Continued) (T_A = 25°C, V_{CC} = 6V, f = 200 KHz)

Output section

Symbol	Parameter	Conditions	Min	Typ.	Max	Unit
I _{LEAK}	Leakage current	V _O = 25V			10	μA
I _{DRV}	Sink current	V _{IN} = 20V		200		mA
	Source current	V _{IN} = 20V		200		mA
V _{SAT}	Output saturation voltage	I _O = 10 mA		1.0	1.5	V
I _{SC}	Short-circuit output current	V _O = 6V		120		mA

PWM comparator

Symbol	Parameter	Conditions	Min	Typ.	Max	Unit
V _{T0}	Input threshold voltage at f = 10 KHz (COMP)	CT		0.6	0.7	V
V _{T100}		Maximum duty cycle	1.2	1.3		V


Total device

Symbol	Parameter	Conditions	Min	Typ.	Max	Unit
I _{CCA}	Average supply current	C _T = 270pF		6	10	mA

Soft Start

Symbol	Parameter	Conditions	Min	Typ.	Max	Unit
V _{SS}	Soft-start Voltage			2.3		V
I _{SS}	Constant Charge Current			20		μA







Typical Application Circuit

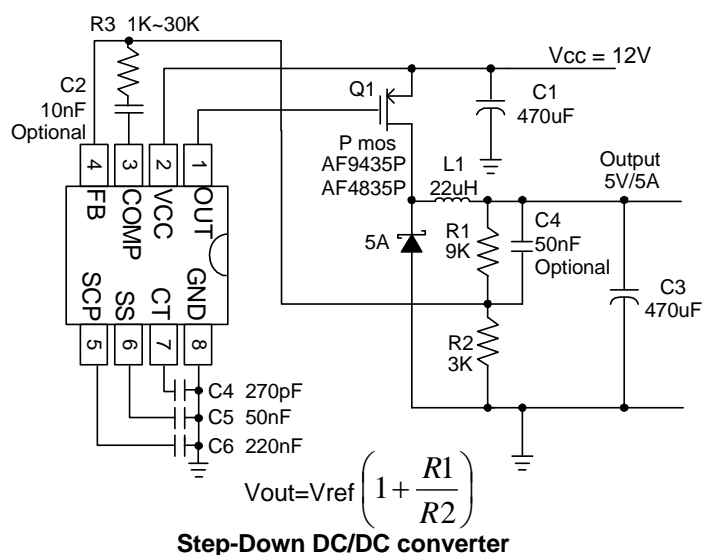



AP2004
PWM BUCK CONTROLLER


Typical Characteristics

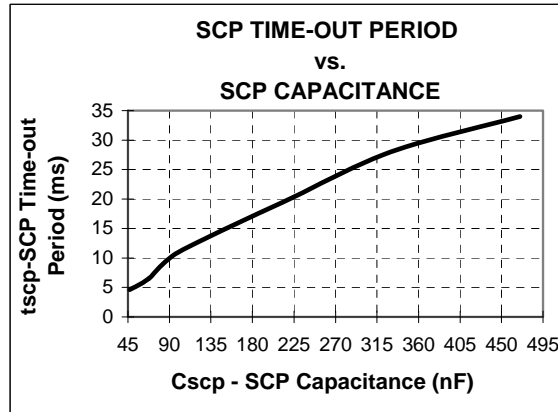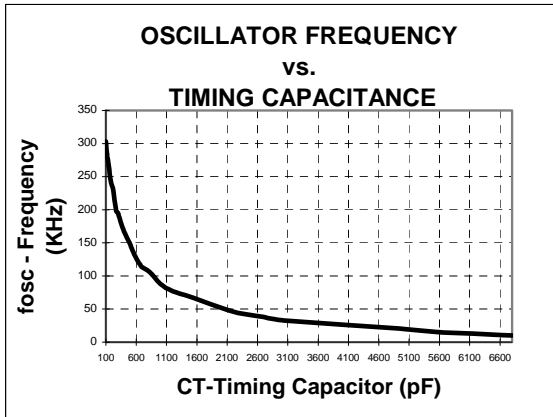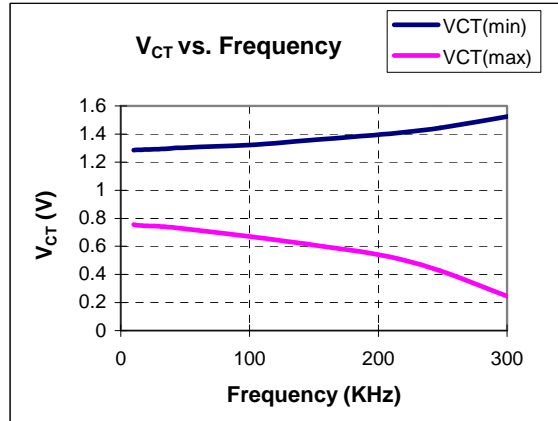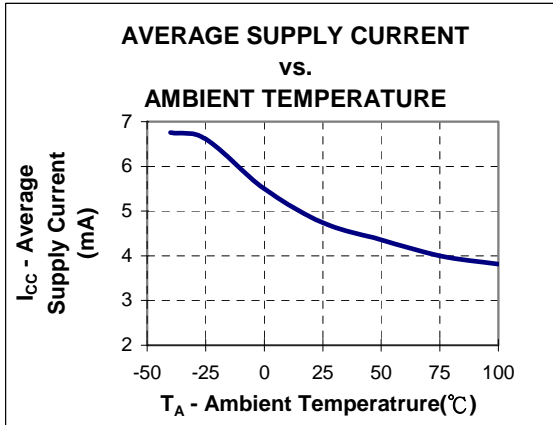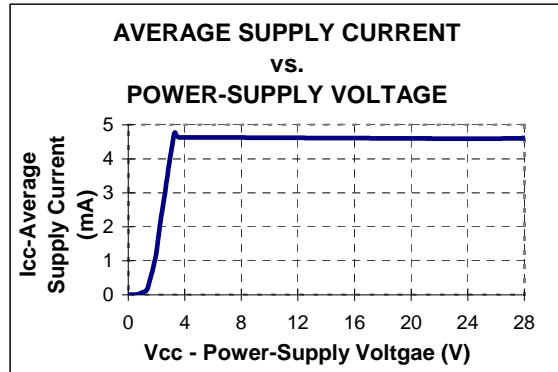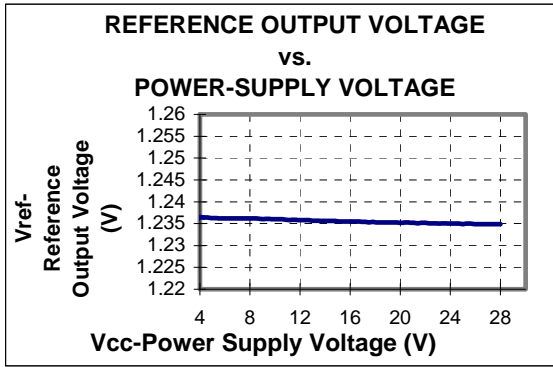




AP2004
PWM BUCK CONTROLLER

Typical Characteristics (Continued)

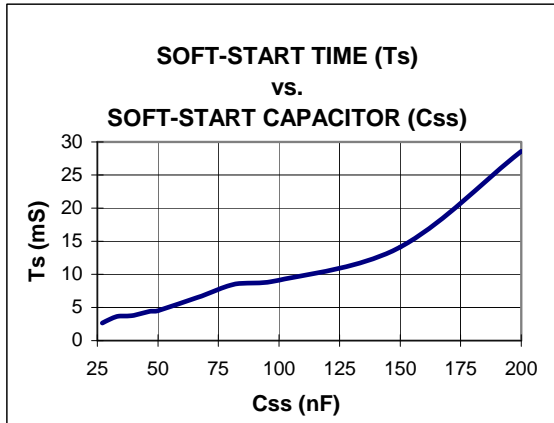

Marking Information

(1) SOP-8L

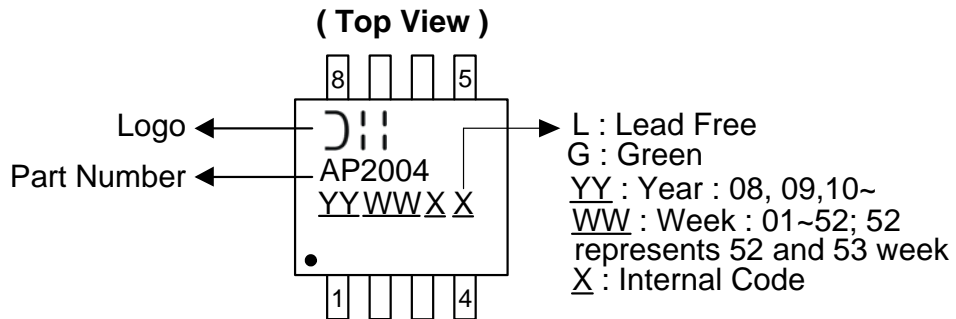




AP2004
PWM BUCK CONTROLLER

Package Information (All Dimensions in mm)

(1) Package Type: SOP- 8L

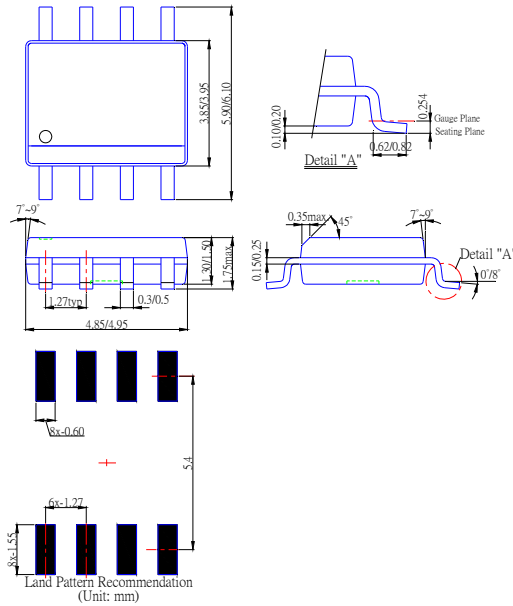

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.