

## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[AVX Corporation](#)  
[108450011001169](#)


For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



# Male Style H 11



## Series 8450 – single row (1 x 11)

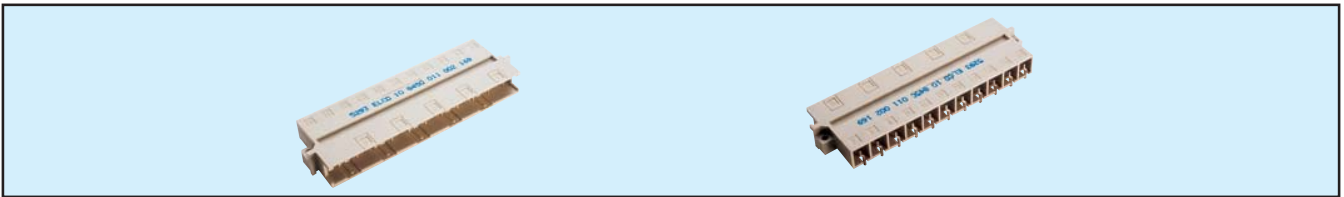

Contact Design and Termination Length	Number of Contacts	Loading Description	Part Number
			Performance classes according to DIN 41612 I
Faston (6.3 x 0.8)	11	fully loaded	10 8450 011 001 169
		fully loaded + ground in first & last position	10 8450 011 101 169
		fully loaded + keying*	12 8450 011 001 169
		fully loaded + keying + ground in first & last position	12 8450 011 101 169
3.0mm (1.2 x 0.8mm) Right Angled PC solder	11	fully loaded	10 8450 011 002 169
		fully loaded + ground in first & last position	10 8450 011 102 169
		fully loaded + keying*	12 8450 011 002 169
		fully loaded + keying + ground in first & last position	12 8450 011 102 169


NB: Connectors with Keying also require 10 pieces per connector pair of p/n 80 8456 8814 00 000  
 Additional Plating & Loading Variations: Please contact your local AVX sales office or distributor.

### LOADING DESCRIPTION



△ denotes ground pin


### DIMENSIONS

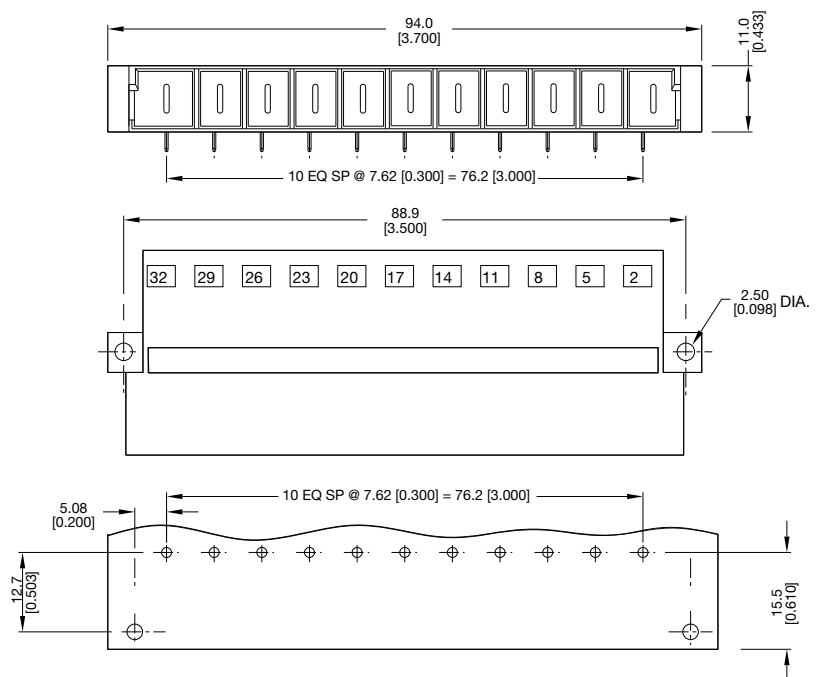



# Female Style H 11


## Series 8450 – single row (1 x 11)

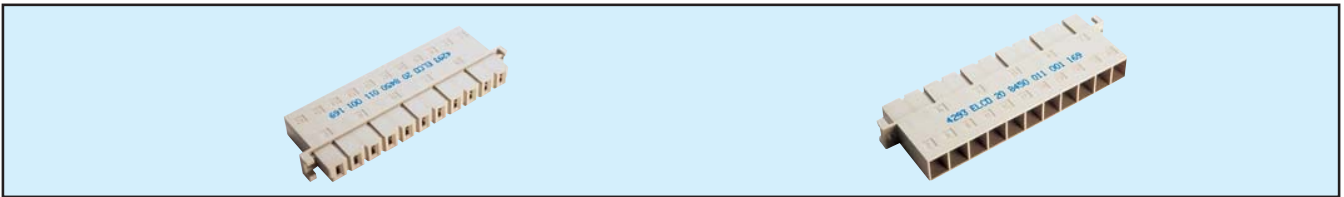

Contact Design and Termination Length	Number of Contacts	Loading Description	Part Number
			Performance classes according to DIN 41612
Faston (6.3 x 0.8)	11	fully loaded	20 8450 011 001 169
	11	fully loaded with keying*	22 8450 011 001 169

NB: Connectors with Keying also require 10 pieces per connector pair of p/n 80 8456 8814 00 000  
Additional Plating & Loading Variations: Please contact your local AVX sales office or distributor.

### LOADING DESCRIPTION



11 contacts, fully loaded

### DIMENSIONS

