

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Panduit](#)

[AMC25-AT-C10](#)

For any questions, you can email us directly:


[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

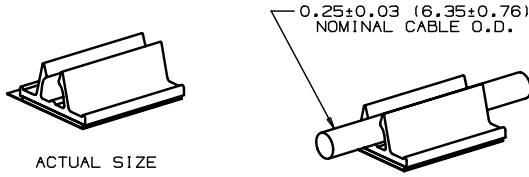

NO WARRANTY, EXPRESSED OR IMPLIED, IS MADE BY PANDUIT WITH RESPECT TO ADHESIVE BOND PERFORMANCE, AMONG OTHER THINGS, THE CONDITIONS UNDER WHICH THESE MOUNTS MAY BE APPLIED AND/OR THE SURFACE TO WHICH THEY MAY BE APPLIED ARE BEYOND PANDUIT'S CONTROL.

*PANDUIT PART NO.	WEIGHT LBS / 100 PCS. (g)
AMC25-AT	0.40 (182)

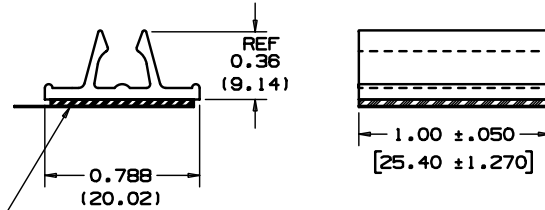

- TO APPLY CLIP:
1. REMOVE PROTECTIVE LINER.
  2. PLACE IN DESIRED LOCATION.
  3. APPLY PRESSURE TO CLIP.

- NOTES:
- \*1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.

ADHESIVE TAPE: PRESSURE SENSITIVE FOAM .040 (1.02) THICK WITH ACRYLIC ADHESIVE AND PROTECTIVE LINER. MOUNT IS DESIGNED TO SUPPORT .40 lbs. (182g) MAXIMUM WEIGHT ON AA CLEAN, DRY, SMOOTH, GREASE-FREE SURFACE.

DIMENSIONS IN BRACKETS ARE METRIC [ mm ]

002 FILES/LAYERS G00239FW\_DC\_AMC25\_03

**PANDUIT**

CORP. TINLEY PARK, ILLINOIS

AMC25-AT  
ADHESIVE MOUNTING CLIP

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONAL TOLERANCES ARE:  
(.X) ±0.05 (1.3) (.XXX) ±0.010 (0.25)  
(.XX) ±0.02 (0.5) ANGLES ±5°

UNLESS OTHERWISE SPECIFIED,  
ALL DIMENSIONS ARE GIVEN  
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY

CGSM

MAT'L:

WHITE  
PVC

SCALE

NONE

DATE

8-20-98

CHK'D

DRAWING NO.

G00239FW

DWG

A

SIZE

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
3	2/10/05	JAD		.788 (20.02) was .84 (21.3)	G00239FW	3		
2	4/26/04	JAD		CUT LENGTH TOL WAS .02"	G00239FW	2		
1	6/18/01	LOG		DELETED DIM'S, ADDED REF TO DIM UPDATED FOR WEB	G00239FW	1		
R	8-20-98	CGSM		INITIAL RELEASE	G00239FW	R		