

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[AVX Corporation](#)
[677200602400000](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Shroud

Type A and C for Midplane and Rear I/O Assemblies

Series 7200


- Used in conjunction with feedthru connectors
- When installed over the long tails, a male connector is created
- Used in conjunction with feedthru connectors
- When installed over the long tails, a male connector is created
- Enables rear Input/Output or midplane applications with daughter cards or cable assemblies
- No spacer required
- 3 heights available to accommodate different board thicknesses
- Other versions available upon request

67 7200 6024 00 000 = P1, P4 Type A 154 cavities (22 position)
 L=3.9mm; H=14.35mm; PCB Thickness 4.0mm

67 7200 6064 00 000 = P1, P4 Type A 154 cavities (22 position)
 L=4.7mm; H=15.15mm; PCB Thickness 3.2mm

67 7200 6084 00 000 = P1, P4 Type A 154 cavities (22 position)
 L=5.3mm; H=15.75mm; PCB Thickness 2.4mm

67 7200 6094 00 000 = P1, P4 Type A 154 cavities (22 position)
 L=6.1mm; H=16.55mm; PCB Thickness 1.6mm

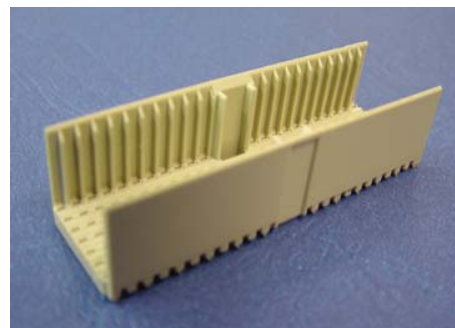

67 7200 6424 00 000 = Type C 77 cavities (11 position) L=3.9mm;
 H=14.35mm; PCB Thickness 4.0mm

67 7200 6464 00 000 = Type C 77 cavities (11 position)
 L=4.7mm; H=15.15mm; PCB Thickness 3.2mm

67 7200 6484 00 000 = Type C 77 cavities (11 position)
 L=5.3mm; H=15.75mm; PCB Thickness 2.4mm

67 7200 6494 00 000 = Type C 77 cavities (11 position)
 L=6.1mm; H=16.55mm; PCB Thickness 1.6mm

