Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

STMicroelectronics 2STA2121

For any questions, you can email us directly: sales@integrated-circuit.com





2STA2121

High power PNP epitaxial planar bipolar transistor

Features

- High breakdown voltage V_{CEO} = -250 V
- Complementary to 2STC5949
- Typical f_t = 25 MHz
- Fully characterized at 125 °C

Application

■ Audio power amplifier

Description

The device is a PNP transistor manufactured using new BiT-LA (Bipolar transistor for linear amplifier) technology. The resulting transistor shows good gain linearity behaviour.

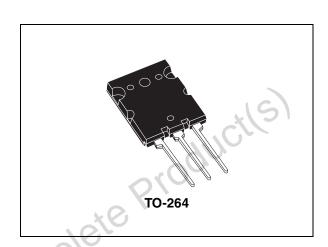


Figure 1. Internal schematic diagram

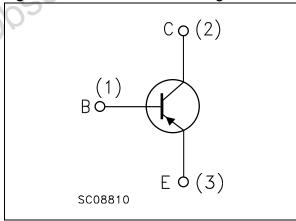


Table 1. Device summary

Order code	Marking Package		Packaging	
2STA2121	2STA2121	TO-264	Tube	

November 2008 Rev 3 1/8



Electrical ratings 2STA2121

1 Electrical ratings

Table 2. Absolute maximum rating

Symbol	Parameter	Value	Unit
V _{CBO}	Collector-base voltage (I _E = 0)	-250	V
V _{CEO}	Collector-emitter voltage (I _B = 0)	-250	V
V _{EBO}	Emitter-base voltage (I _C = 0)	-6	V
I _C	Collector current	-17	Α
I _{CM}	Collector peak current (t _P < 5ms)	-34	Α
P _{TOT}	Total dissipation at T _c = 25 °C	220	W
T _{stg}	Storage temperature	-65 to 150	°C
TJ	Max. operating junction temperature	150	°C

Table 3. Thermal data

	Symbol	Parameter		Value	Unit	
	R _{thj-case} Thermal resistance junction-case max		max	0.568	°C/W	
L	iiij odoc	•	76/			
		. 6	0,			
		003				
		,(5)				
		C				
		AUI				
	01	oducilsi				
	(O)					
Obsole						
, c0'						
000						
0.						



2STA2121

Electrical characteristics

2 **Electrical characteristics**

(T_{case} = 25 °C; unless otherwise specified)

Table 4. **Electrical characteristics**

Symbol	Parameter	Test conditions	Min.	Тур.	Max.	Unit
I _{CBO}	Collector cut-off current (I _E = 0)	V _{CB} = -250 V			-5	μΑ
I _{EBO}	Emitter cut-off current (I _C = 0)	V _{EB} = -6 V			-5	μΑ
V _{(BR)CEO} ⁽¹⁾	Collector-emitter breakdown voltage (I _B = 0)	I _C = -50 mA	-250		3	V
V _{(BR)CBO}	Collector-base breakdown voltage ($I_E = 0$)	I _C = -100 μA	-250			>
V _{(BR)EBO} ⁽¹⁾	Emitter-base breakdown voltage ($I_C = 0$)	I _E = -1 mA	-6			٧
V _{CE(sat)} (1)	Collector-emitter saturation voltage	$I_C = -8 \text{ A}$ $I_B = -800 \text{ mA}$			-3	٧
V _{BE} ⁽¹⁾	Base-emitter voltage	$I_C = -7 \text{ A}$ $V_{CE} = -5 \text{ V}$			-1.5	٧
h _{FE}	DC current gain	$I_C = -1 A$ $V_{CE} = -5 V$ $I_C = -7 A$ $V_{CE} = -5 V$	80 35		160	
f _T	Transition frequency	I _C = -1 A V _{CE} = -5 V		25		MHz
Soler						

^{1.} Pulsed duration = 300 μ s, duty cycle \leq 1.5%



Electrical characteristics

2STA2121

2.1 Electrical characteristics (curves)

Figure 2. Safe operating area

Figure 3. Derating curve

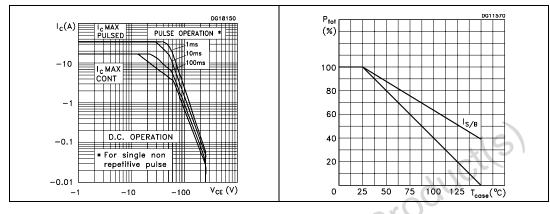


Figure 4. Output characteristics

Figure 5. DC current gain


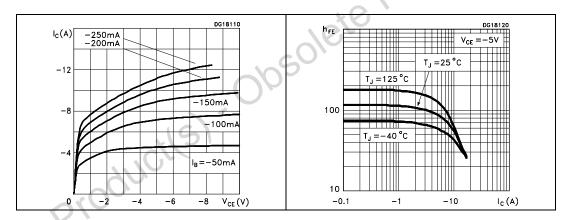


Figure 6. Collector-emitter saturation voltage

Figure 7. Base-emitter voltage



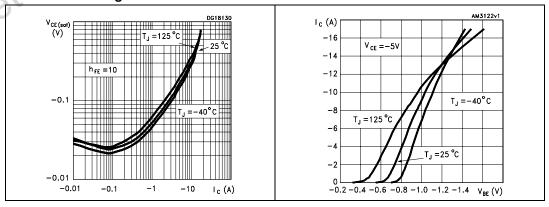

2STA2121

Package mechanical data

3 Package mechanical data

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a Lead-free second level interconnect . The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: www.st.com


Obsolete Product(s).



Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

TO-264 Mechanical data

Dim.	mm.					
	Min.	Тур	Max.			
Α	4.80		5.20			
A1	2.50		3.10			
b	0.90	1.0	1.25			
b1		2.5	(C//			
b2		2.8	You			
С	0.50	0.60	0.85			
D	25.6		26.4			
E	19.80	20,	20.20			
е	5.15	10,10	5.75			
L	19.50	~O_	20.50			
L1	2.30	75	2.70			
øΡ	3.55	9	3.65			

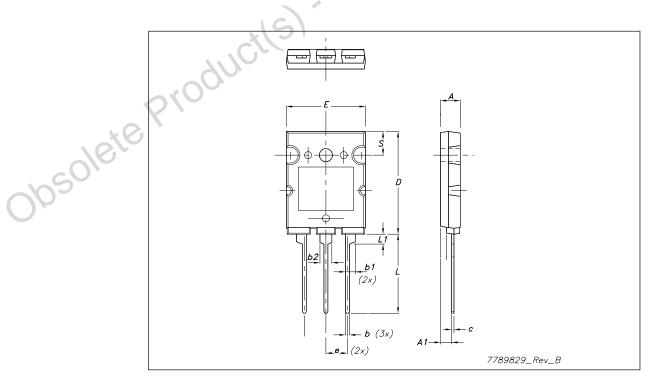



2STA2121 Revision history

4 Revision history

Table 5. Document revision history

	Date	Revision	Changes
	23-Nov-2007	1	Initial release
	08-May-2008	2	Added new graphics.
	12-Nov-2008	3	Document status promoted from preliminary data to datasheet
Obsole	Riod	incile	Obsolete Product(s)





Distributor of STMicroelectronics: Excellent Integrated System Limited

Datasheet of 2STA2121 - TRANS PNP 250V 17A TO-264

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

2STA2121

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZE REPRESENTATIVE OF ST, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS, WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2008 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

