

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Omron](#)
[G3VM-351AY](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


OMRON

MOS FET Relays

G3VM-351AY/DY

Compact, General-purpose, Analog-switching MOS FET Relays, with Dielectric Strength of 5 kVAC between I/O Using Optical Isolation.

- Trigger LED forward current of 2 mA (maximum) facilitates power saving designs.
- Switches minute analog signals.
- Continuous load current of 100 mA.



NEW

Note: The actual product is marked differently from the image shown here.

RoHS compliant

⚠ Refer to "Common Precautions".

Application Examples

- Power meter
- Measurement devices
- Security systems
- Industrial equipment

List of Models


Contact form	Terminals	Load voltage (peak value) (See the note.)	Model	Number per stick	Number per tape
SPST-NO	PCB terminals	350 V	G3VM-351AY	100	---
	Surface-mounting terminals		G3VM-351DY		
			G3VM-351DY(TR)	---	1,500

Note: The AC peak and DC value are given for the load voltage.


Dimensions

Note: All units are in millimeters unless otherwise indicated.

G3VM-351AY




Note: The actual product is marked differently from the image shown here.

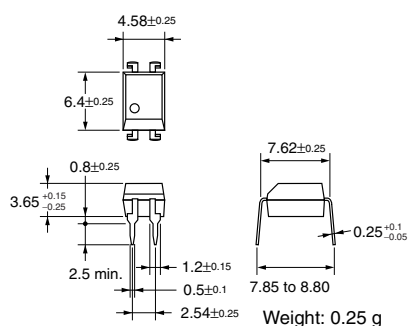

G3VM-351DY




Note: The actual product is marked differently from the image shown here.


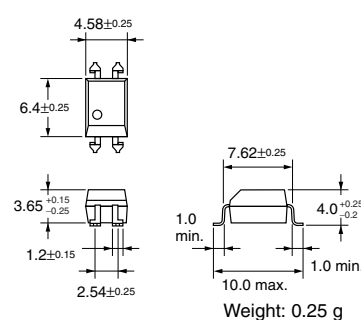


Terminal Arrangement/Internal Connections (Top View)

G3VM-351AY




G3VM-351DY



Note: The actual product is marked differently from the image shown here.


PCB Dimensions (Bottom View)

G3VM-351AY



Actual Mounting Pad Dimensions (Recommended Value, Top View)

G3VM-351DY



G3VM-351AY/DY ————— OMRON ————— G3VM-351AY/DY

■ Absolute Maximum Ratings (Ta = 25°C)


Item	Symbol	Rating	Unit	Measurement Conditions
Input	LED forward current	I_F	30	mA
	Repetitive peak LED forward current	I_{FP}	1	A
	LED forward current reduction rate	$\Delta I_F/^\circ\text{C}$	-0.3	mA/°C
	LED reverse voltage	V_R	5	V
	Connection temperature	T_j	125	°C
Output	Load voltage (AC peak/DC)	V_{OFF}	350	V
	Continuous load current (AC peak/DC)	I_O	100	mA
	ON current reduction rate	$\Delta I_O/^\circ\text{C}$	-1.0	mA/°C
	Pulse ON current	I_{op}	0.3	A
	Connection temperature	T_j	125	°C
Dielectric strength between input and output (See note 1.)		V_{I-O}	5,000	Vrms
Operating temperature		T_a	-40 to +85	°C
Storage temperature		T_{stg}	-55 to +125	°C
Soldering temperature (10 s)		---	260	°C

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

■ Electrical Characteristics (Ta = 25°C)

Item	Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Input	LED forward voltage	V_F	1.45	1.63	1.75	V
	Reverse current	I_R	---	---	10	μA
	Capacity between terminals	C_T	---	40	---	pF
	Trigger LED forward current	I_{FT}	---	0.3	2	mA
Output	Maximum resistance with output ON	R_{ON}	---	25	35	Ω
			---	35	50	Ω
	Current leakage when the relay is open	I_{LEAK}	---	---	1.0	μA
	Capacity between terminals	C_{OFF}	---	30	---	pF
Capacity between I/O terminals		C_{I-O}	---	0.8	---	pF
Insulation resistance		R_{I-O}	1,000	---	---	MΩ
Turn-ON time		t_{ON}	---	0.1	1	ms
Turn-OFF time		t_{OFF}	---	0.2	1	ms

Note: 2. Turn-ON and Turn-OFF Times




■ Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.

Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	V_{DD}	---	---	280	V
Operating LED forward current	I_F	3	5	20	mA
Continuous load current (AC peak/DC)	I_O	---	---	100	mA
Operating temperature	T_a	-20	---	65	°C

■ Engineering Data

Load Current vs. Ambient Temperature
G3VM-351AY(DY)

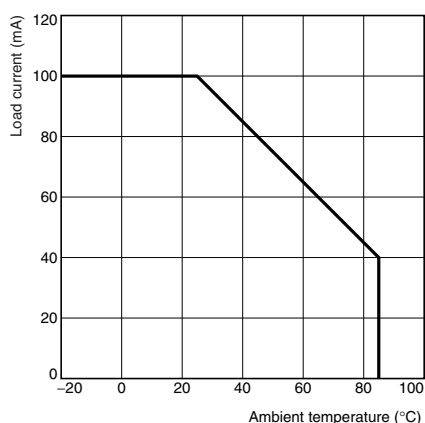

■ Safety Precautions

Refer to "Common Precautions" for all G3VM models.