

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[IXYS Corporation](#)
[DSSK28-006BS-TUB](#)


For any questions, you can email us directly:

sales@integrated-circuit.com


Power Schottky Rectifier with common cathode

$$\begin{aligned} I_{FAV} &= 2 \times 15 \text{ A} \\ V_{RRM} &= 60 \text{ V} \\ V_F &= 0.52 \text{ V} \end{aligned}$$

| V_{RSM} V | V_{RRM} V | Type |
|----------------|----------------|---------------|
| 60 | 60 | DSSK 28-006BS |



TO-263 AB



A = Anode, C = Cathode, TAB = Cathode

| Symbol | Conditions | Maximum Ratings | |
|----------------|--|-----------------|------------------|
| I_{FRMS} | | 35 | A |
| I_{FAV} | $T_C = 135^\circ\text{C}$; rectangular, $d = 0.5$ | 15 | A |
| I_{FAV} | $T_C = 135^\circ\text{C}$; rectangular, $d = 0.5$; per device | 30 | A |
| I_{FSM} | $T_{VJ} = 45^\circ\text{C}$; $t_p = 10 \text{ ms}$ (50 Hz), sine | 300 | A |
| E_{AS} | $I_{AS} = 10 \text{ A}$; $L = 100 \mu\text{H}$; $T_{VJ} = 25^\circ\text{C}$; non repetitive | 5 | mJ |
| I_{AR} | $V_A = 1.5 \cdot V_{RRM}$ typ.; $f = 10 \text{ kHz}$; repetitive | 1 | A |
| $(dv/dt)_{cr}$ | | 1000 | V/ μs |
| T_{VJ} | | -55...+150 | $^\circ\text{C}$ |
| T_{VJM} | | 150 | $^\circ\text{C}$ |
| T_{stg} | | -55...+150 | $^\circ\text{C}$ |
| P_{tot} | $T_C = 25^\circ\text{C}$ | 90 | W |
| M_d | mounting torque (Version B only) | 0.4...0.6 | Nm |
| Weight | typical | 2 | g |

Features

- International standard package
- Very low V_F
- Extremely low switching losses
- Low I_{RM} -values
- Epoxy meets UL 94V-0

Applications

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses

| Symbol | Conditions | Characteristic Values | |
|--------------------------|--|-----------------------|-------------|
| | | typ. | max. |
| I_R ① | $V_R = V_{RRM}$; $T_{VJ} = 25^\circ\text{C}$ $V_R = V_{RRM}$; $T_{VJ} = 100^\circ\text{C}$ | 10 50 | mA mA |
| V_F | $I_F = 15 \text{ A}$; $T_{VJ} = 125^\circ\text{C}$ $I_F = 15 \text{ A}$; $T_{VJ} = 25^\circ\text{C}$ $I_F = 30 \text{ A}$; $T_{VJ} = 125^\circ\text{C}$ | 0.52 0.56 0.69 | V V V |
| R_{thJC} R_{thCH} | 0.25 | 1.4 | K/W K/W |

Pulse test: ① Pulse Width = 5 ms, Duty Cycle < 2.0%
Data according to IEC 60747 and per diode unless otherwise specified.

Dimensions see Outlines.pdf

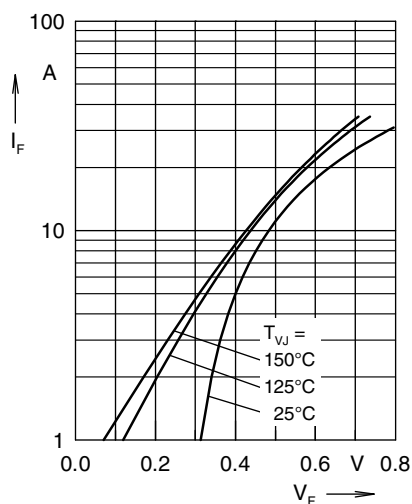


Fig. 1 Maximum forward voltage drop characteristics

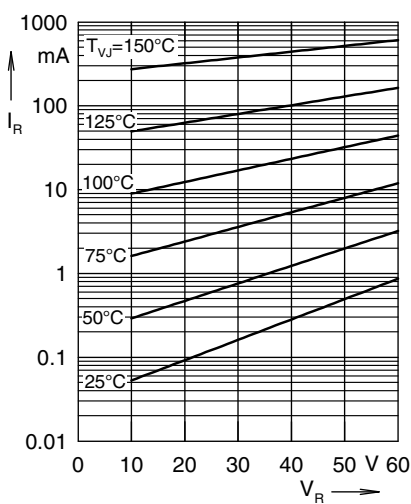


Fig. 2 Typ. value of reverse current I_R versus reverse voltage V_R

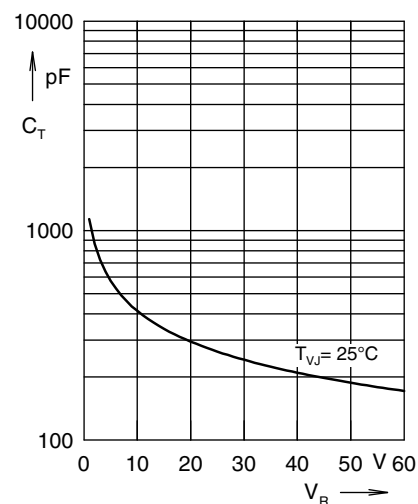


Fig. 3 Typ. junction capacitance C_T versus reverse voltage V_R

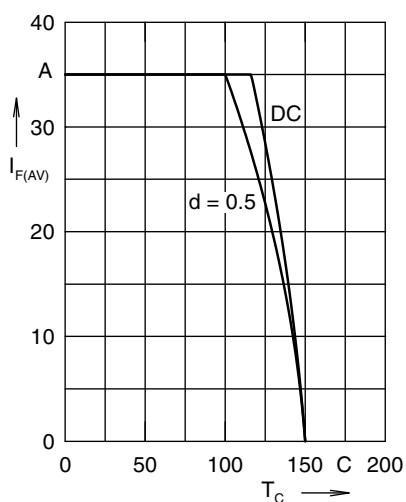


Fig. 4 Average forward current $I_{F(AV)}$ versus case temperature T_C

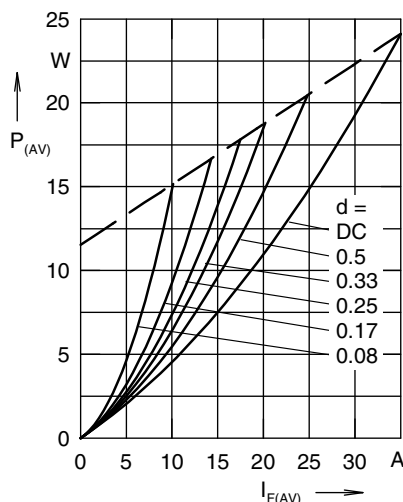


Fig. 5 Forward power loss characteristics

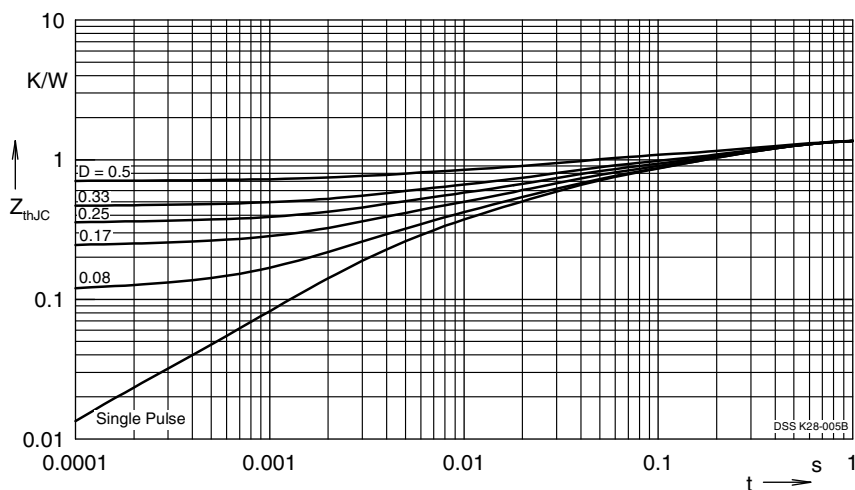


Fig. 6 Transient thermal impedance junction to case at various duty cycles

Note: All curves are per diode