

## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Hammond Manufacturing](#)  
[125CSE](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

# Universal Single Ended Tube Output *125SE Series*


Audio



## Features

- Designed for general purpose or replacement use (not Hi-Fi), in single ended, tube output circuits.
- Frequency response: 100 Hz. - 15 KHz at full rated power (+/- 1db max. - ref. 1 KHz).
- For full frequency response (20 Hz. to 20 KHz.) - see our **1627-1642 Series**.
- For push-pull output use, see our **125 Series**.
- Open style with minimum 12" long primary & secondary leads.
- All sizes use butt stacked cores (using 29M6 steel) with an air gap, to reduce D.C. core saturation.
- Primary impedance range from 2,500 to 10,000 Ohms.
- Secondary impedance range from 4 to 32 Ohms.

## Gallery

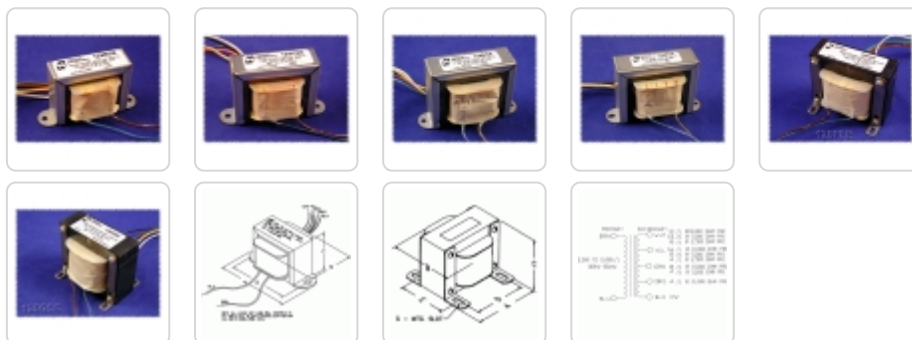

Part No.	Audio Power (Watts)	Max. D.C. Bias (ma)	Weight ( lbs.)	Dimensions					Mounting Hole G
				A	B	C	D	E	
<b>125A5E</b>	3	25	0.5	2.81	1.35	1.69	2.38	-	0.19
<b>125B5E</b>	5	45	1.1	3.25	1.63	2.00	2.81	-	0.19
<b>125C5E</b>	8	60	1.3	3.69	1.86	2.31	3.13	-	0.19
<b>125D5E</b>	10	70	2	4.00	2.10	2.63	3.56	-	0.19
<b>125E5E</b>	15	80	3	4.50	2.36	2.94	4.00	-	0.19
<b>125F5E</b>	20	90	4.5	3.76	2.52	3.15	3.13	2.25	0.20 x 0.38
<b>125G5E</b>	25	100	6	4.15	2.88	3.46	3.45	2.50	0.20 x 0.38

Primary Winding Data		
DC		
Part No.	Inductance (Minimum)	Resistance (+/- 20%)
<b>125E5E</b>	9.58 H	90.6 Ohms



**Distributor of Hammond Manufacturing: Excellent Integrated System Limited**

Datasheet of 125CSE - TRANSFORMER 8W 60MA TUBE SNGL

Contact us: [sales@integrated-circuit.com](mailto:sales@integrated-circuit.com) Website: [www.integrated-circuit.com](http://www.integrated-circuit.com)

---

*Data subject to change without notice*

© 2016. Hammond Manufacturing Ltd. All rights reserved.