

Excellent Integrated System Limited

Stocking Distributor




Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[66527-007](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NO.
SEE TABLE

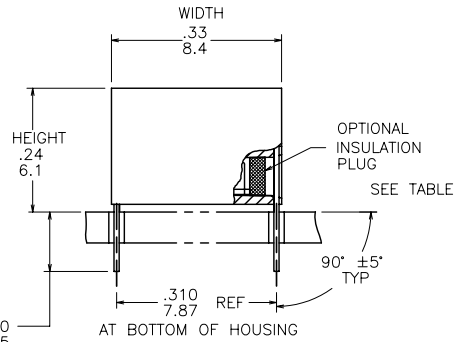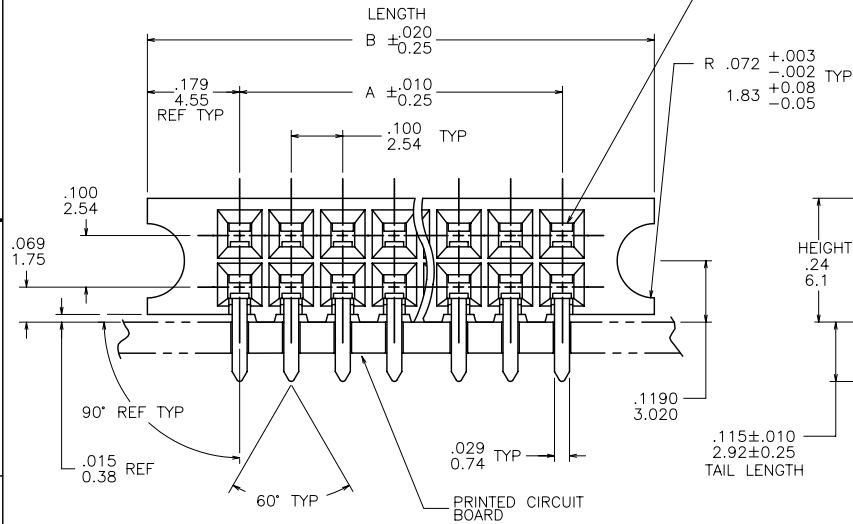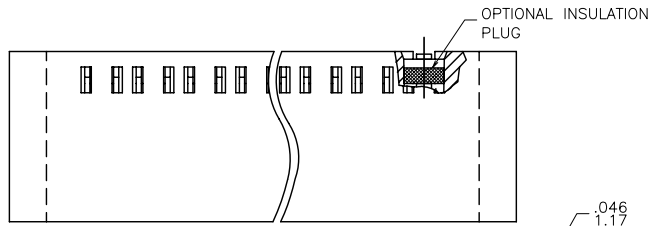

mat'l code				surface ISO 1902	tolerance ISO 436 ISO 1101	projection INCH/MM	product family CARD CONN.
ltr	ec'n no	dr	date	tolerances unless otherwise specified			title
N	V61633	EPK	9/17/90	linear	.XX ± 0.1 / .XX0.3	INCH/MM	GUIDE PIN CARD CONNECTOR
P	V70994	JM	10/19/97		.XXX ± 0.05 / .XXX0.13	scale 4:1	
R	V02523	AZ	10/24/00	0° $\pm 2^\circ$	.XXX ± 0.020 / .XXX0.05		
S	V21783	CGD	11/18/02	dr	C.DAILY	11/18/02	dwg no
T	M05-0113	MHT	6/14/05	engr	H.SUNDY	11/18/02	sheet 1 of 6
U	M07-0137	MHT	2/26/07	chr	H.SUNDY	11/18/02	size
V	M08-0232	MHT	8/14/08	appd	H.SUNDY	11/18/02	A3
sheet	revision	V	V	V	V	V	type
index	sheet	1	2	3	4	5	Product Customer Drawing

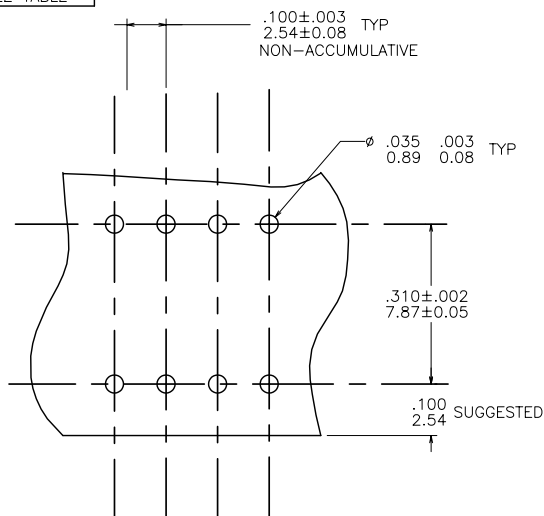
PRODUCT NO.
SEE TABLE

FIGURE 1

NOTES:

1. HOUSING MATERIAL:
FILLED HIGH TEMPERATURE NYLON
PER UL 94V-0
COLOR: BLACK
2. TERMINAL MATERIAL:
BODY: BRASS, .010/0.25 THICK
SPRING: BE-CU, HEAT TREATED
BODY PLATING DUPLEX :
30 MICROINCH/0.76 MICRON GOLD OR GXT
OVER 50 MICROINCH/1.27 MICRON NICKEL
IN CONTACT AREA
SOLDER TAIL : 100u"/2.54um PURE TIN MIN
OVER 050u"/1.27um NICKEL
SPRING PLATING: GOLD FLASH

3. MARK "FCI", FCI PART NUMBER AND DATE CODE.
LEGIBLE ON TUBE LABEL.

4. APPLICATION INFORMATION:

- A. RECOMMENDED MOUNTING HOLE PATTERN IS SHOWN IN FIGURE "1"
- B. ALL MATING PINS TO BE .025/.64 SQUARE ON TRUE CENTER OF GIVEN TERMINAL SPACINGS WITHIN .015/0.38 DIA.
- C. SUGGESTED MATING PIN LENGTH
.350±.020/8.89±0.51

5. MARK IN .060/1.52 HIGH LETTERS.(CONTRASTING COLORS) - 9113 4445

FCI XXXX

DATE CODE

⑥ .003/0.08 THICK TERMINAL SPRING.

7. PACKAGING: STANDARD 24" LONG TUBES.

8. 550mm LONG SPECIAL SHORT TUBE PACKAGING:
ADD SUFFIX "A" TO PART DASH NUMBER. EXAMPLE: 66527-001A

⑨ ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.

10. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.

11. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.

12. PLATING OPTIONS:
MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.

mat'l code				surface	ISO 1902	tolerance	ISO 436	ISO 1101	projection	product family
ltr	ecr no	dr	date	tolerances unless otherwise specified						CARD CONN.
v				angles	linear	.XX ±.01/XX±0.3			INCH/MM	title
				0°±2°		.XXX ±.005/XXX±0.13			scale	4:1
				dr	C.DAILY	11/18/02				dwg no
				eng	H.SUNDY	11/18/02				sheet 2 of 6
				chr	H.SUNDY	11/18/02				size
				appd	H.SUNDY	11/18/02				A3
sheet	revision									type
index	sheet									Product Customer Drawing

PRODUCT NO. NOTE 9	NO. OF POS.	A DIM	B DIM	INSUL. PLUG	SPECIAL
66527-001		UNAVAILABLE			
-002	2X2	.100/2.54	.458/11.63	NO	
-003	2X3	.200/5.08	.558/14.17		
-004	2X4	.300/7.62	.658/16.71		
-005	2X5	.400/10.16	.758/19.25		
-006	2X6	.500/12.70	.858/21.79		
-007	2X7	.600/15.24	.958/24.33		
-008	2X8	.700/17.78	1.058/26.87		
-009	2X9	.800/20.32	1.158/29.41		
-010	2X10	.900/22.86	1.258/31.95		
-011	2X11	1.000/25.4	1.358/34.49		
-012	2X12	1.100/27.94	1.458/37.03		
-013	2X13	1.200/30.48	1.558/39.57		
-014	2X14	1.300/33.02	1.658/42.11		
-015	2X15	1.400/35.56	1.758/44.65		
-016	2X16	1.500/38.10	1.858/47.19		
-017	2X17	1.600/40.64	1.958/49.73		
-018	2X18	1.700/43.18	2.058/52.27		
-019	2X19	1.800/45.72	2.158/54.81		
-020	2X20	1.900/48.26	2.258/57.35		
-021	2X21	2.000/50.80	2.358/59.89		
-022	2X22	2.100/53.34	2.458/62.43		
-023	2X23	2.200/55.88	2.558/64.97		
-024	2X24	2.300/58.42	2.658/67.51		
-025	2X25	2.400/60.96	2.758/70.05		
-026	2X26	2.500/63.50	2.858/72.59		
-027	2X27	2.600/66.04	2.958/75.13		
-028	2X28	2.700/68.58	3.058/77.67		
-029	2X29	2.800/71.12	3.158/80.21		
-030	2X30	2.900/73.66	3.258/82.75		
-031	2X31	3.000/76.20	3.358/85.29		
-032	2X32	3.100/78.74	3.458/87.83		
-033	2X33	3.200/81.28	3.558/90.37		
-034	2X34	3.300/83.82	3.658/92.91		
-035	2X35	3.400/86.36	3.758/95.45		
-036	2X36	3.500/88.90	3.858/97.99		
-037	2X37	3.600/91.44	3.958/100.53		
-038	2X38	3.700/93.98	4.058/103.07		
-039	2X39	3.800/96.52	4.158/105.61		
66527-040	2X40	3.900/99.60	4.258/108.15	NO	

mat'l. code		surface ISO 1902		tolerance ISO 406 ISO 1101		projection		product family	
—		—		—		—		CARD. CONN.	
ltr	ec'n no	dr	date	tolerances unless otherwise specified		INCH/MM		title	
V				angles	linear	—		GUIDE PIN	
				0°±2°	—	—		CARD CONNECTOR	
				dr	C.DAILY	11/18/02	scale	4:1	dwg no
				engr	H.SUNDY	11/18/02			66527
				chr	H.SUNDY	11/18/02			sheet 3 of 6
				appd	H.SUNDY	11/18/02			size A3
sheet	revision								type
index	sheet								Product Customer Drawing

PRODUCT NO. NOTE 9	NO. OF POS.	A DIM	B DIM	INSUL. PLUG	SPECIAL
66527-041	2X41	4.000/101.60	4.358/110.69	NO	
-042	2X42	4.100/104.14	4.458/113.23		
-043	2X43	4.200/106.68	4.558/115.77		
-044	2X44	4.300/109.22	4.658/118.31		
-045	2X45	4.400/111.76	4.758/120.85		
-046	2X46	4.500/114.30	4.858/123.39		
-047	2X47	4.600/116.84	4.958/125.93		
-048	2X48	4.700/119.38	5.058/128.47		
-049	2X49	4.800/121.92	5.158/131.01		
-050	2X50	4.900/124.46	5.258/133.55		
-051	2X51	5.000/127.00	5.358/136.09		
-052	2X52	5.100/129.54	5.458/138.63		
-053	2X53	5.200/132.08	5.558/141.17		
-054	2X54	5.300/134.62	5.658/143.71		
-055	2X55	5.400/137.16	5.758/146.25		
-056	2X56	5.500/139.70	5.858/148.79		
-057	2X57	5.600/142.24	5.958/151.33		
-058	2X58	5.700/144.78	6.058/153.87		
-059	2X59	5.800/147.32	6.158/156.41		
-060	2X60	5.900/149.86	6.258/158.95		
-061	2X61	6.000/152.40	6.358/161.49		
-062	2X62	6.100/154.94	6.458/164.03		
-063	2X63	6.200/157.48	6.558/166.57		
-064	2X64	6.300/160.02	6.658/169.11		
66527-065	2X65	6.400/162.56	6.758/171.65	NO	
-066 THRU -100					

OBSOLETE

mat'l. code				surface ISO 1802		tolerance ISO 406 ISO 1101		projection		product family	
itr				ecn no		dr		date		CARD CONN.	
v				angles		linear		INCH/MM		title	
				0"±2"		.00 ±.01/.040.13 .000 ±.005/.0040.13 .000 ±.0020/.0040.05		scale 4:1		GUIDE PIN CARD CONNECTOR	
dr				C.DAILY		11/18/02		FCI		dwg no	
eng				H.SUNDY		11/18/02				66527	
chr				H.SUNDY		11/18/02				A3	
appd				H.SUNDY		11/18/02				type	
sheet				revision						Product Customer Drawing	
index				sheet							

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

PRODUCT NO. NOTE 9	NO. OF POS.	A DIM	B DIM	INSUL. PLUG	SPECIAL
66527-501		UNAVAILABLE			
-502	2X2	.100/2.54	.458/11.63	YES	
-503	2X3	.200/5.08	.558/14.17		
-504	2X4	.300/7.62	.658/16.71		
-505	2X5	.400/10.16	.758/19.25		
-506	2X6	.500/12.70	.858/21.79		
-507	2X7	.600/15.24	.958/24.33		
-508	2X8	.700/17.78	1.058/26.87		
-509	2X9	.800/20.32	1.158/29.41		
-510	2X10	.900/22.86	1.258/31.95		
-511	2X11	1.000/25.4	1.358/34.49		
-512	2X12	1.100/27.94	1.458/37.03		
-513	2X13	1.200/30.48	1.558/39.57		
-514	2X14	1.300/33.02	1.658/42.11		
-515	2X15	1.400/35.56	1.758/44.65		
-516	2X16	1.500/38.10	1.858/47.19		
-517	2X17	1.600/40.64	1.958/49.73		
-518	2X18	1.700/43.18	2.058/52.27		
-519	2X19	1.800/45.72	2.158/54.81		
-520	2X20	1.900/48.26	2.258/57.35		
-521	2X21	2.000/50.80	2.358/59.89		
-522	2X22	2.100/53.34	2.458/62.43		
-523	2X23	2.200/55.88	2.558/64.97		
-524	2X24	2.300/58.42	2.658/67.51		
-525	2X25	2.400/60.96	2.758/70.05		
-526	2X26	2.500/63.50	2.858/72.59		
-527	2X27	2.600/66.04	2.958/75.13		
-528	2X28	2.700/68.58	3.058/77.67		
-529	2X29	2.800/71.12	3.158/80.21		
-530	2X30	2.900/73.66	3.258/82.75		
-531	2X31	3.000/76.20	3.358/85.29		
-532	2X32	3.100/78.74	3.458/87.83		
-533	2X33	3.200/81.28	3.558/90.37		
-534	2X34	3.300/83.82	3.658/92.91		
-535	2X35	3.400/86.36	3.758/95.45		
-536	2X36	3.500/88.90	3.858/97.99		
-537	2X37	3.600/91.44	3.958/100.53		
-538	2X38	3.700/93.98	4.058/103.07		
-539	2X39	3.800/96.52	4.158/105.61		
66527-540	2X40	3.900/99.60	4.258/108.15	YES	

mat'l. code		surface ISO 1902		tolerance ISO 406 ISO 1101		projection 		product family CARD CONN.	
ltr	ecr no	dr	date	tolerances unless otherwise specified		INCH/MM		title GUIDE PIN CARD CONNECTOR	
V				angles	linear	XX ±.01/XX±0.13 XXX ±.005/XXX±0.13 XXXX ±.0020/XXX±0.05		scale 4:1	
				0"±2"					
				dr	C.DAILY	11/18/02			dwg no
				eng	H.SUNDY	11/18/02			66527
				chr	H.SUNDY	11/18/02			sheet 5 of 6
				appd	H.SUNDY	11/18/02			size A3
sheet	revision								type Product Customer Drawing
index	sheet								

PRODUCT NO. NOTE 9	NO. OF POS.	A DIM	B DIM	INSUL. PLUG	SPECIAL
66527-541	2X41	4.000/101.60	4.358/110.69	YES	
-542	2X42	4.100/104.14	4.458/113.23		
-543	2X43	4.200/106.68	4.558/115.77		
-544	2X44	4.300/109.22	4.658/118.31		
-545	2X45	4.400/111.76	4.758/120.85		
-546	2X46	4.500/114.30	4.858/123.39		
-547	2X47	4.600/116.84	4.958/125.93		
-548	2X48	4.700/119.38	5.058/128.47		
-549	2X49	4.800/121.92	5.158/131.01		
-550	2X50	4.900/124.46	5.258/133.55		
-551	2X51	5.000/127.00	5.358/136.09		
-552	2X52	5.100/129.54	5.458/138.63		
-553	2X53	5.200/132.08	5.558/141.17		
-554	2X54	5.300/134.62	5.658/143.71		
-555	2X55	5.400/137.16	5.758/146.25		
-556	2X56	5.500/139.70	5.858/148.79		
-557	2X57	5.600/142.24	5.958/151.33		
-558	2X58	5.700/144.78	6.058/153.87		
-559	2X59	5.800/147.32	6.158/156.41		
-560	2X60	5.900/149.86	6.258/158.95		
-561	2X61	6.000/152.40	6.358/161.49		
-562	2X62	6.100/154.94	6.458/164.03		
-563	2X63	6.200/157.48	6.558/166.57		
-564	2X64	6.300/160.02	6.658/169.11		
66527-565	2X65	6.400/162.56	6.758/171.65	YES	
-566 THRU					
-600					
66527-800	2X50	4.900/124.46	5.258/133.55	NO	SEE NOTE 6
-801	2X30	2.900/73.66	3.258/82.75	NO	SEE NOTE 6
-802	2X40	3.900/99.066	4.258/108.15	NO	SEE NOTE 6
66527-803	2X25	2.400/60.96	2.758/70.05	YES	SEE NOTE 6

OBSOLETE

mat'l. code				surface ISO 1902		tolerance ISO 406 ISO 1101		projection		product family	
itr				ecn no		dr		date		CARD CONN.	
v				angles		linear		INCH/MM		title	
				0°±2°		.XX ±.01/.XX0.3 .XXX ±.005/.XXX0.13 .000X ±.0020/.00X0.05		scale 4:1		GUIDE PIN CARD CONNECTOR	
				dr		C.DAILY		11/18/02		dwg no	
				engr		H.SUNDY		11/18/02		sheet 6 of 6	
				chr		H.SUNDY		11/18/02		size	
				appd		H.SUNDY		11/18/02		A3	
sheet		revision		index		sheet				type	
										Product Customer Drawing	