

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Johanson Technology Inc.](#)
[5388BP15A0975E](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

High Frequency Ceramic Solutions

5388 MHz Band Pass Filter **P/N 5388BP15A0975**
 Detail Specification: 10/06/08 Page 1 of 2

General Specifications


Part Number	5388BP15A0975
Frequency (MHz)	4900 - 5875
Insertion Loss	1.8 dB max.
Return Loss	8.5 dB min.
Attenuation (min.)	30 dB @ 500 - 4000 MHz
Attenuation (min.)	20 dB @ 4200 MHz
Attenuation (min.)	15 dB @ 9800 - 11750 MHz

Impedance	50 Ω
Input Power	500 mW max.
Reel Quantity	4,000
Operating Temperature	-40 to +85°C
Storage Temp	+5 ~ +35°C, Humidity: 45~75%RH, 12 mos. Max

P/N Suffix	Packaging Style	Bulk	Suffix = S	Eg. 5388BP15A0975S
		T & R	Suffix = E	Eg. 5388BP15A0975E
	Termination Style	100% Tin	Suffix = None	Eg. 5388BP15A0975(E or S)
		Tin / Lead	Suffix = /Pb	Eg. 5388BP15A0975(E or S)/Pb

Mechanical Dimensions

	In	mm
L	0.079 ± 0.006	2.00 ± 0.15
W	0.049 ± 0.004	1.25 ± 0.10
T	0.037 ± 0.004	0.95 ± 0.10
a	0.051 ± 0.006	1.30 ± 0.15
b	0.012 ± 0.006	0.30 ± 0.15
c	0.010 ± 0.006	0.25 ± 0.15
d	0.014 ± 0.006	0.35 ± 0.15

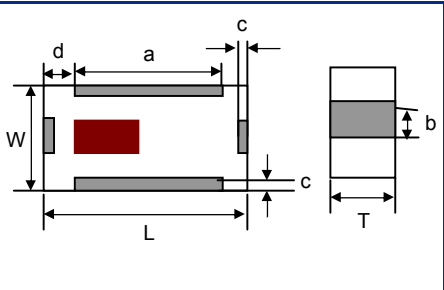

Terminal Configuration	
No.	Function
1	GND
2	OUT
3	GND
4	IN

Mounting Considerations

Mount these devices with brown mark facing up.
 * Line width should be designed to provide 50 ohm impedance, depending on PCB material and thickness

Units: mm

Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.

High Frequency Ceramic Solutions


5388 MHz Band Pass Filter

P/N 5388BP15A0975

Detail Specification: 10/06/08

Page 2 of 2

Typical Electrical Performance (T=25°C)

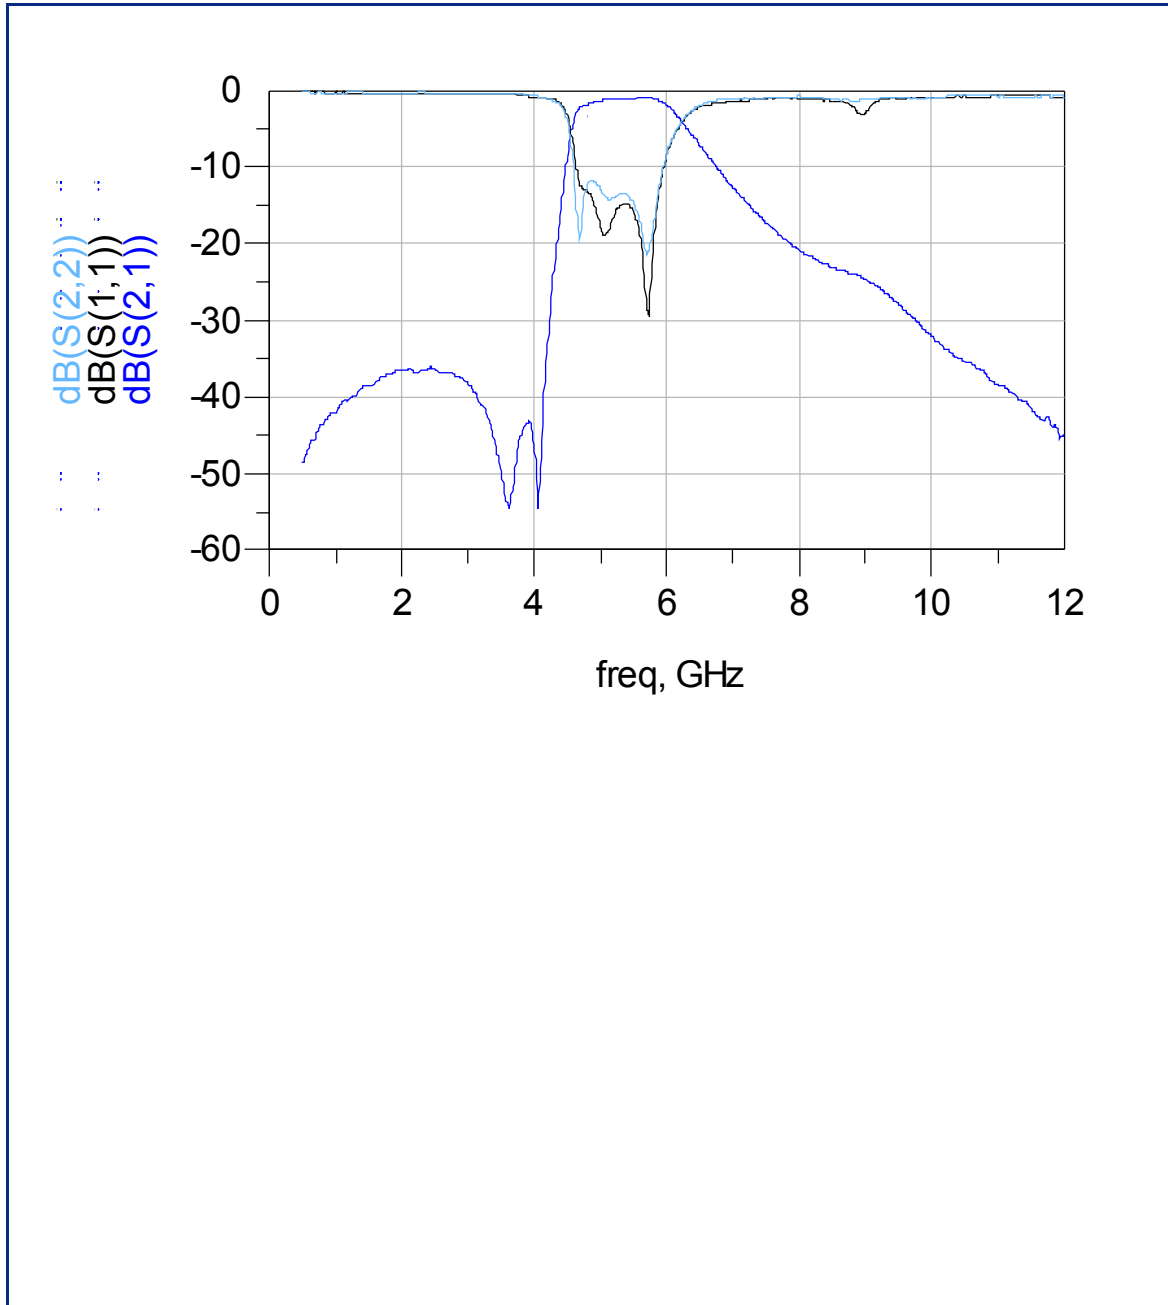

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.