

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Triad Magnetics](#)

[F3-56](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Power Transformer Chassis Mount: Quick Pack

F3-56

Description:

The F3-56 Quick Pack small power transformer offers a significant reduction in size and weight over a standard transformer. This transformer can be used for a wide variety of applications. It is bobbin wound for reduced size and small operating space.


Electrical Specifications (@25C):

Maximum Power: 2.4VA

Input Voltage: 115VAC@50/60Hz

Output Voltage: 56VCT@0.045A

Hipot: 2500VAC primary to secondary; 1500VAC windings to core.

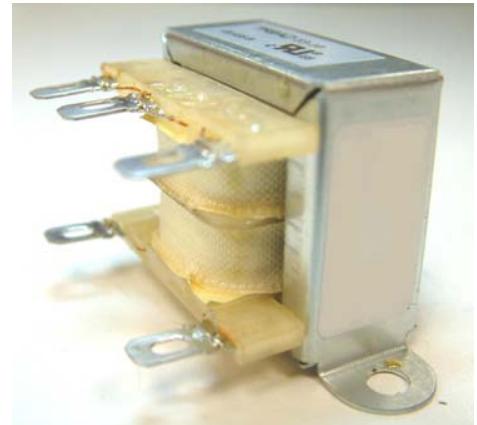

Construction:

Split bobbin non concentric winding eliminates costly electrostatic shielding. Termination is suitable for quick connects or soldering. Built with UL Class B Insulation System.

Safety:

UL: File E53148, UL 5085-1 and 2 (formerly UL 506), General Purpose.




Dimensions:

A	B	C	D	E	F	G
1.187	1.75±.03	2.062	1.187	1.625	.187 Dia	.562


Notes: 1. Units: inches.

2. Terminal size: .187" X 0.021".

3. Weight: .25 lbs




Schematic:



Input: 1 to 3

Output: 4 to 6

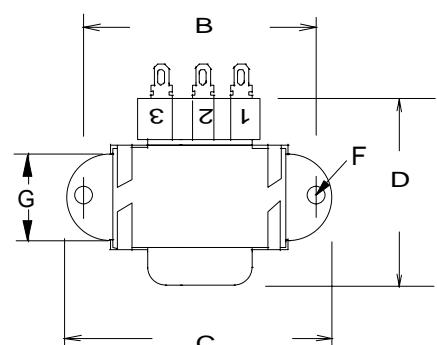

RoHS Compliance: As of manufacturing date February 2005, all standard products meet the requirements of 2011/65/EU, known as the RoHS initiative.

* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.