Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

STMicroelectronics
LM317MDT-TR

For any questions, you can email us directly:
sales@integrated-circuit.com

Distributor of STMicroelectronics: Excellent Integrated System Limited
Datasheet of LM317MDT-TR - IC REG LDO ADJ 0.5A DPAK
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

LM217M, LM317M

Medium current 1.2 to 37 V adjustable voltage regulator

Datasheet - production data

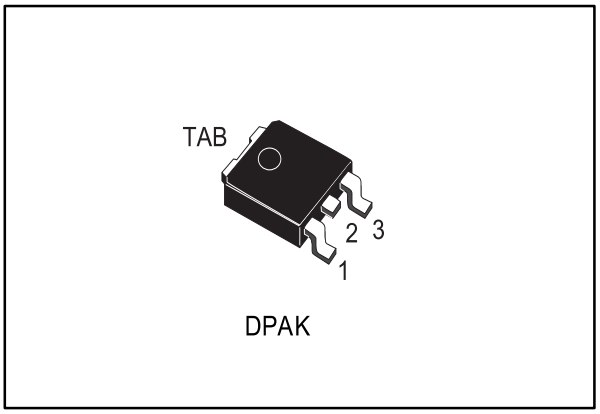

Description

The LM217M and LM317M are monolithic integrated circuits in DPAK package used as positive adjustable voltage regulators. They are designed to supply until 500 mA of load current with an output voltage adjustable over a 1.2 to 37 V range. The nominal output voltage is selected by one resistive divider only, making the device exceptionally easy to configure and avoiding the use of several fixed regulators.

Features

- Output voltage range: 1.2 to 37 V
- Output current in excess of 500 mA
- Line regulation typ. 0.01%
- Load regulation typ. 0.1%
- Thermal overload protection
- Short-circuit protection
- Output transition safe area compensation
- Floating operation for high voltage applications

Table 1: Device summary

Order code	Packing
LM217MDT-TR	Tape and reel
LM317MDT-TR	

This is information on a product in full production.
www.st.com

Distributor of STMicroelectronics: Excellent Integrated System Limited
Datasheet of LM317MDT-TR - IC REG LDO ADJ 0.5A DPAK
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Contents

1 Diagram 3
2 Pin configuration 4
3 Maximum ratings 5
4 Electrical characteristics 6
5 Typical performance 8
6 Application information 10
6.1 External capacitors 10
6.2 Protection diodes 10
6.3 Start-up block 10
7 Application circuits 11
8 Package information 13
8.1 DPAK (TO-252) package information 13
8.2 DPAK (TO-252) packing information 16
9 Revision history 18

Distributor of STMicroelectronics: Excellent Integrated System Limited
Datasheet of LM317MDT-TR - IC REG LDO ADJ 0.5A DPAK
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

1 Diagram

Figure 1: Schematic diagram

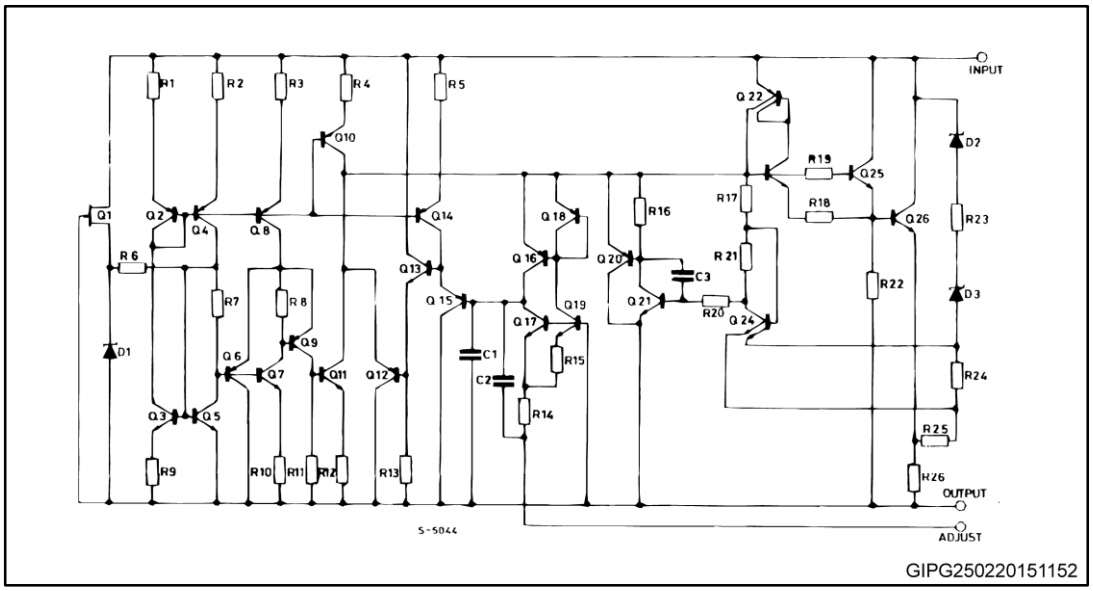

Distributor of STMicroelectronics: Excellent Integrated System Limited
Datasheet of LM317MDT-TR - IC REG LDO ADJ 0.5A DPAK
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

2 Pin configuration

Figure 2: Pin connections (top view)

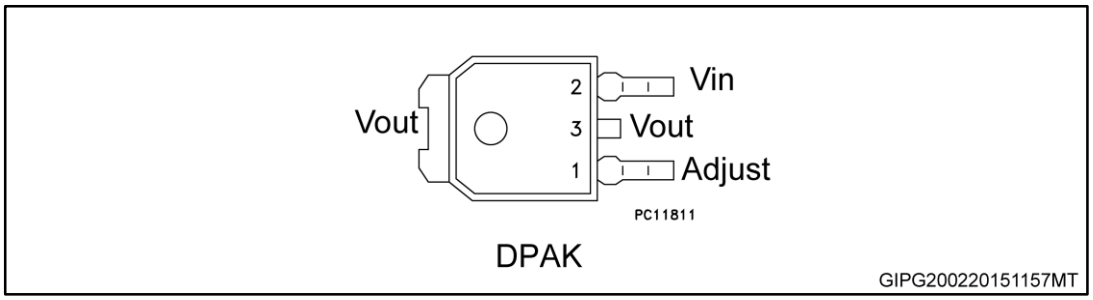

Distributor of STMicroelectronics: Excellent Integrated System Limited
Datasheet of LM317MDT-TR - IC REG LDO ADJ 0.5A DPAK
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

3 Maximum ratings

Table 2: Absolute maximum ratings

Symbol	Parameter		Value	Unit
V_I-V_O	Input-to-output differential voltage		40	V
P_D	Power dissipation		Internally limited	mW
T_{OP}	Operating junction temperature range (1)	LM217M	-40 to 125	°C
		LM317M	0 to 125	
T_{STG}	Storage temperature range		-55 to 150	°C

Notes:

(1)Reboot is not guaranteed for $T_J \geq 85$ °C.

Table 3: Thermal data

Symbol	Parameter	DPAK	Unit
R_{thJC}	Thermal resistance junction-case	8	°C/W
R_{thJA}	Thermal resistance junction-ambient	100	°C/W

Figure 3: Test circuit

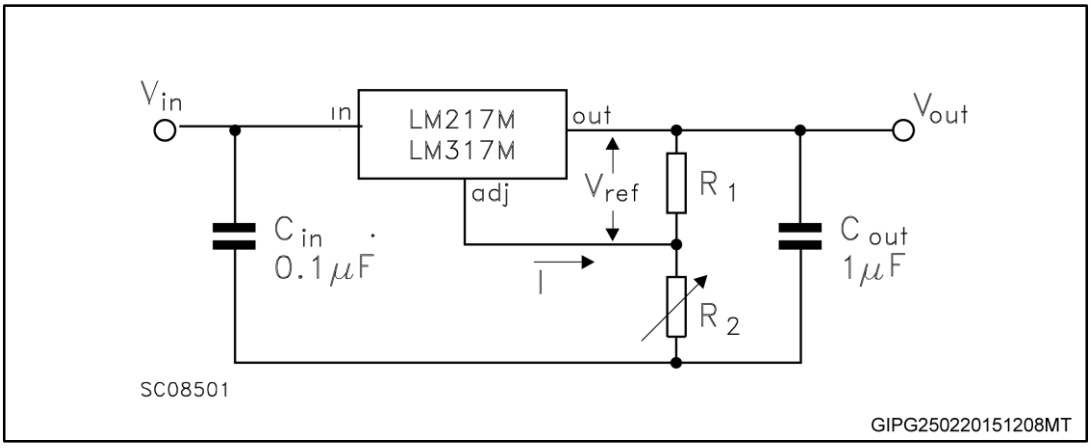

Distributor of STMicroelectronics: Excellent Integrated System Limited
Datasheet of LM317MDT-TR - IC REG LDO ADJ 0.5A DPAK
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

4 Electrical characteristics

Refer to the test circuits, T_J = - 40 to 125 °C, V_I - V_O = 5 V, I_O = 100 mA, P_D ≤ 7.5 Ω, unless otherwise specified.

Table 4: LM217M electrical characteristics

Symbol	Parameter	Test conditions		Min.	Typ.	Max.	Unit
ΔV_O	Line regulation	V_I - V_O = 3 to 40 V	T_J = 25 °C		0.01	0.02	%/V
					0.02	0.05	
ΔV_O	Load regulation	V_O ≤ 5 V I_O = 10 to 500 mA	T_J = 25 °C		5	15	mV
					20	50	
		V_O ≥ 5 V I_O = 10 to 500 mA	T_J = 25 °C		0.1	0.3	%/V_O
					0.3	1	
I_{ADJ}	Adjustment pin current				50	100	µA
ΔI_{ADJ}	Adjustment pin current	V_I - V_O = 3 to 40 V, I_O = 10 to 500 mA			0.2	5	µA
V_{REF}	Reference voltage	V_I - V_O = 3 to 40 V, I_O = 10 to 500 mA		1.2	1.25	1.3	V
$\Delta V_O/V_O$	Output voltage temperature stability				0.7		%
$I_{O(min)}$	Minimum load current	V_I - V_O = 40 V			3.5	5	mA
$I_{O(max)}$	Maximum output current	V_I - V_O ≤ 15 V		500	1000		mA
		V_I - V_O = 40 V, P_d < P_{DMAX}, T_J = 25 °C			200		
eN	Output noise voltage (percentage of V_O)	B = 10 Hz to 100 kHz, T_J = 25 °C			0.003		%
SVR	Supply voltage rejection (1)	T_J = 25 °C f = 120 Hz	C_{ADJ} = 0		65		dB
			C_{ADJ} = 10 µF	66	80		

Notes:

(1)C_{ADJ} is connected between the adjustment pin and ground.

Distributor of STMicroelectronics: Excellent Integrated System Limited
Datasheet of LM317MDT-TR - IC REG LDO ADJ 0.5A DPAK
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Refer to the test circuits, T_J = 0 to 125 °C, V_I - V_O = 5 V, I_O = 100 mA, P_D ≤ 7.5 Ω, unless otherwise specified.

Table 5: LM317M electrical characteristics

Symbol	Parameter	Test conditions		Min.	Typ.	Max.	Unit
ΔV_O	Line regulation	V_I - V_O = 3 to 40 V	T_J = 25 °C		0.01	0.04	%/V
					0.02	0.07	
ΔV_O	Load regulation	V_O ≤ 5 V I_O = 10 to 500 mA	T_J = 25 °C		5	25	mV
					20	70	
		V_O ≥ 5 V I_O = 10 to 500 mA	T_J = 25 °C		0.1	0.5	%/V_O
					0.3	1.5	
I_{ADJ}	Adjustment pin current				50	100	µA
ΔI_{ADJ}	Adjustment pin current	V_I - V_O = 3 to 40 V, I_O = 10 to 500 mA			0.2	5	µA
V_{REF}	Reference voltage	V_I - V_O = 3 to 40 V, I_O = 10 to 500 mA		1.2	1.25	1.3	V
$\Delta V_O/V_O$	Output voltage temperature stability				0.7		%
$I_{O(min)}$	Minimum load current	V_I - V_O = 40 V			3.5	10	mA
$I_{O(max)}$	Maximum output current	V_I - V_O ≤ 15 V		500	1000		mA
		V_I - V_O = 40 V, P_d < P_{DMAX}, T_J = 25 °C			200		
eN	Output noise voltage (V_O percentage)	B = 10 Hz to 100 kHz, T_J = 25 °C			0.003		%
SVR	Supply voltage rejection (1)	T_J = 25 °C f = 120 Hz	C_{ADJ} = 0		65		dB
			C_{ADJ} = 10 µF	66	80		

Notes:

(1)C_{ADJ} is connected between the adjustment pin and ground.

Distributor of STMicroelectronics: Excellent Integrated System Limited
Datasheet of LM317MDT-TR - IC REG LDO ADJ 0.5A DPAK
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

5 Typical performance

Figure 4: Current limit

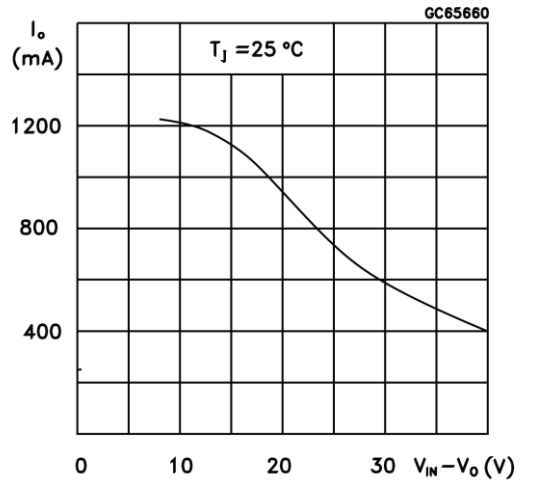

Figure 5: Minimum operating current

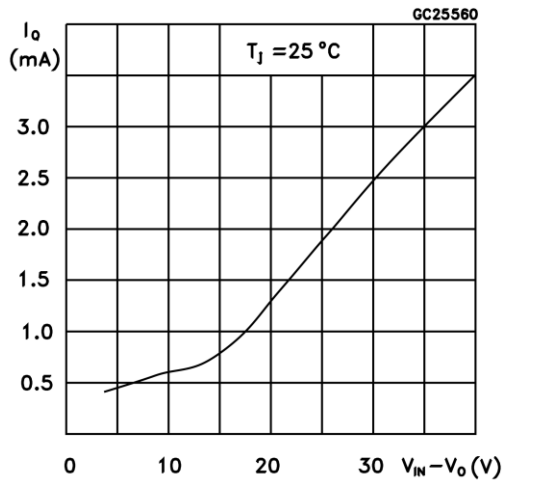

Figure 6: Basic adjustable regulator

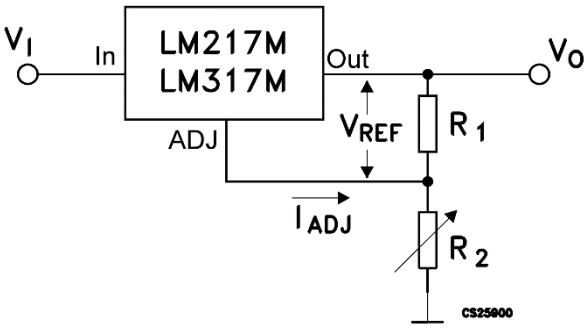

Distributor of STMicroelectronics: Excellent Integrated System Limited
Datasheet of LM317MDT-TR - IC REG LDO ADJ 0.5A DPAK
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Figure 7: Thermal resistance and maximum power dissipation vs. PCB copper length for DPAK

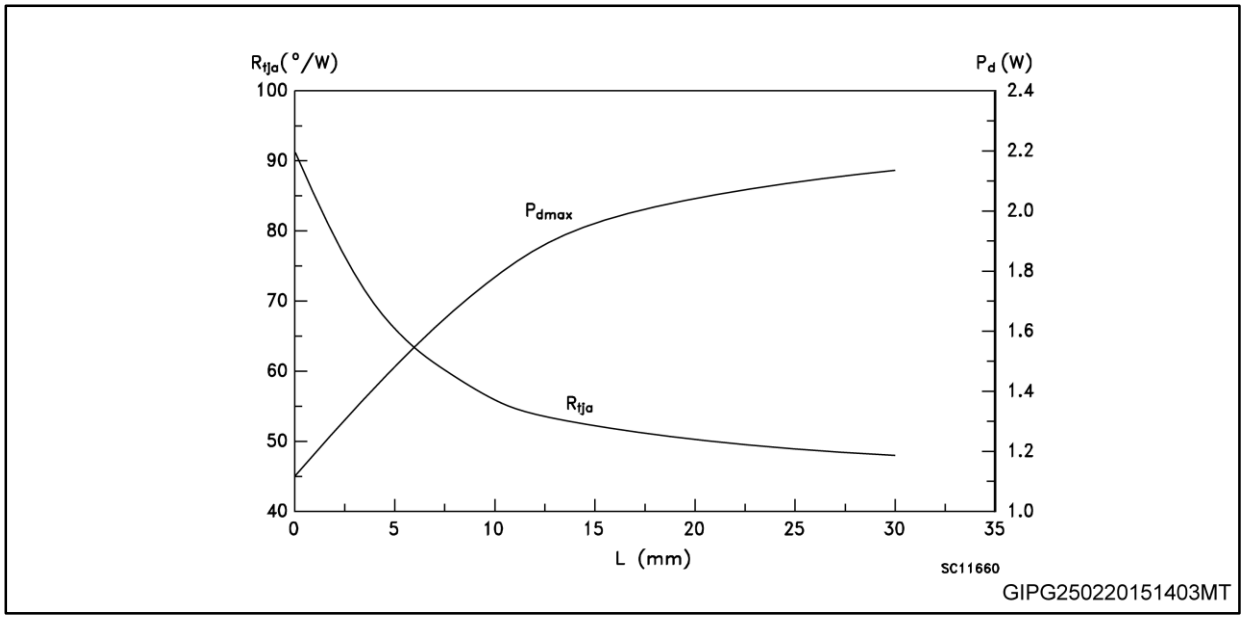

P_{dmax} calculated for T_a = 50 °C.

Distributor of STMicroelectronics: Excellent Integrated System Limited
Datasheet of LM317MDT-TR - IC REG LDO ADJ 0.5A DPAK
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

6 Application information

The LM217M and LM317M provide an internal reference voltage (1.25 V) between the output and adjustment terminals. These devices set a constant current flow across an external resistor divider (see *Figure 6: "Basic adjustable regulator"*), giving the following output voltage:

Equation 1

$V_O = V_{REF} (1 + R_2 / R_1) + I_{ADJ} R_2$

These devices minimize the term I_{ADJ} (100 µA max.) and keep it constant with line and load changes. Usually, the error terms: $I_{ADJ} \times R_2$ can be neglected. To obtain the previous requirement, the regulator quiescent current is returned to the output terminal, imposing a minimum load current condition. If the load is insufficient, the output voltage rises.

Since the LM217M and LM317M devices are floating regulators and only “see” the input-to-output differential voltage, high voltage supplies can be regulated as long as the maximum input-to-output differential is not exceeded. Furthermore, programmable regulators are easily obtained and, by connecting a fixed resistor between the adjustment and output, the devices can be used as precision current regulators. In order to optimize the load regulation, R_1, the current set resistor (see *Figure 6: "Basic adjustable regulator"*) should be as closer as possible to the regulator, while R_2, the ground terminal should be near the ground of the load to provide remote ground sensing.

6.1 External capacitors

Usually, capacitors are not necessary unless the devices are far from the input filter capacitors; in this case an input bypass is needed.

To reduce the sensitivity to input line impedance, a 0.1 µF disc or 1 µF tantalum input bypass capacitor (C_I) is recommended.

The adjustment terminal may be bypassed to ground to improve ripple rejection. This capacitor (C_{ADJ}) avoids the amplification of ripple as the output voltage rises. A 10 µF capacitor should improve ripple rejection about 80 dB at 120 Hz in a 10 V application.

Although the devices are stable without any output capacitors, some external capacitance values can cause excessive ringing. A 1 µF solid tantalum or 25 µF aluminum electrolytic output capacitor swamps this effect and assures stability.

6.2 Protection diodes

When external capacitors are used with any IC regulator, sometimes some protection diodes have to be added to prevent the capacitors from discharging through low current points into the regulator.

Figure 8: "Voltage regulator with protection diodes" shows the devices with the recommended protection diodes for output voltages in excess of 25 V or high capacitance values (C_3 > 25 µF, C_2 > 10 µF). Diode D1 prevents C_3 from discharging through the IC during an input short-circuit. The combination of diodes D1 and D2 prevents C_2 from discharging through the regulator during an input or output short-circuit.

6.3 Start-up block

Reboot of the device is not guaranteed when the junction temperature is over 85 °C.

Distributor of STMicroelectronics: Excellent Integrated System Limited
Datasheet of LM317MDT-TR - IC REG LDO ADJ 0.5A DPAK
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

7 Application circuits

Figure 8: Voltage regulator with protection diodes

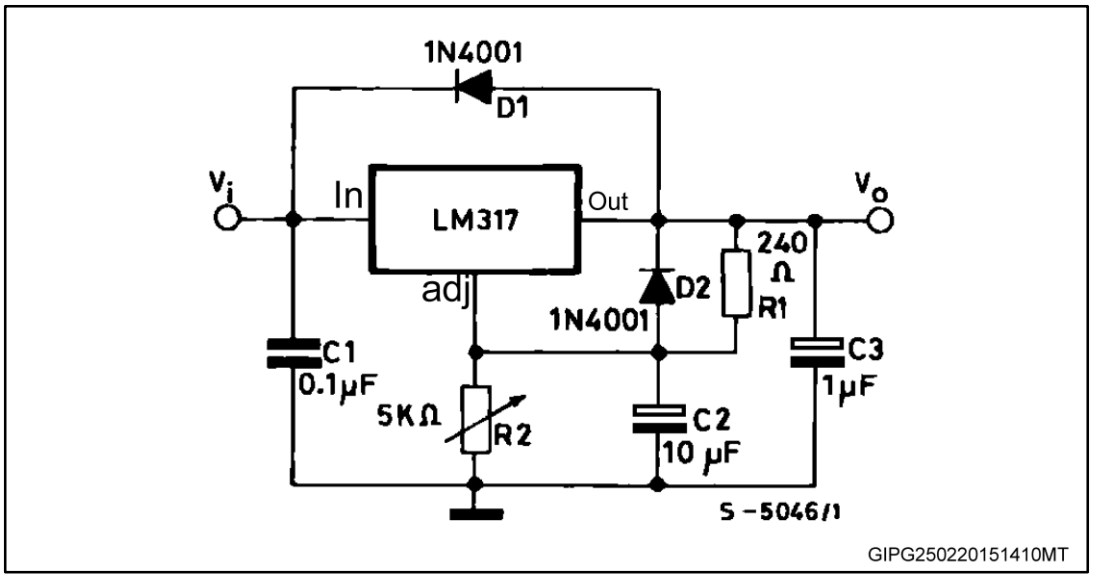

Figure 9: Slow turn-on 15 V regulator

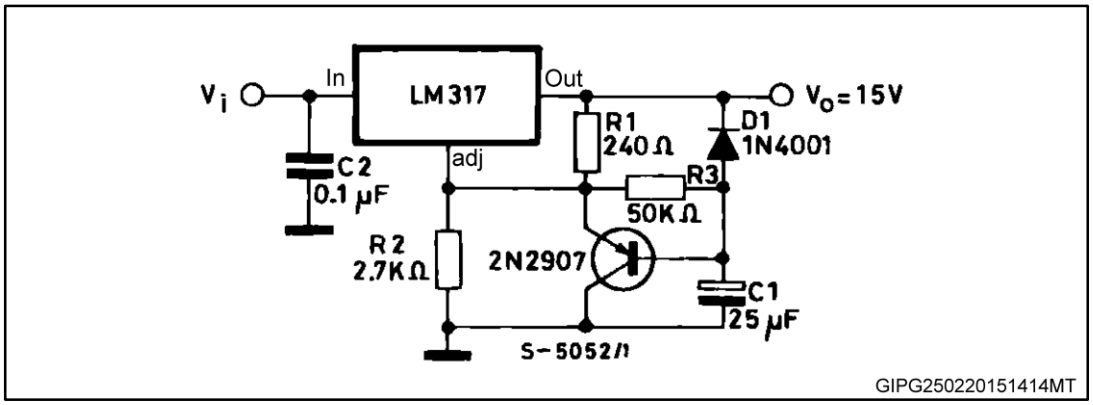

Figure 10: Current regulator

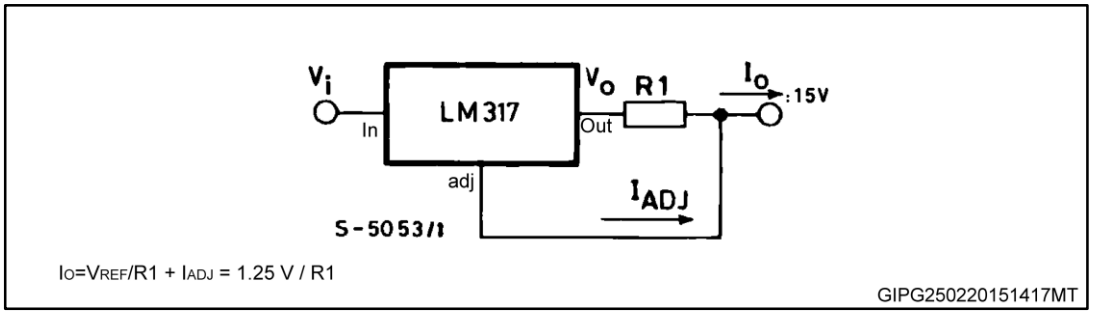

Distributor of STMicroelectronics: Excellent Integrated System Limited
Datasheet of LM317MDT-TR - IC REG LDO ADJ 0.5A DPAK
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Figure 11: 5 V electronic shutdown regulator

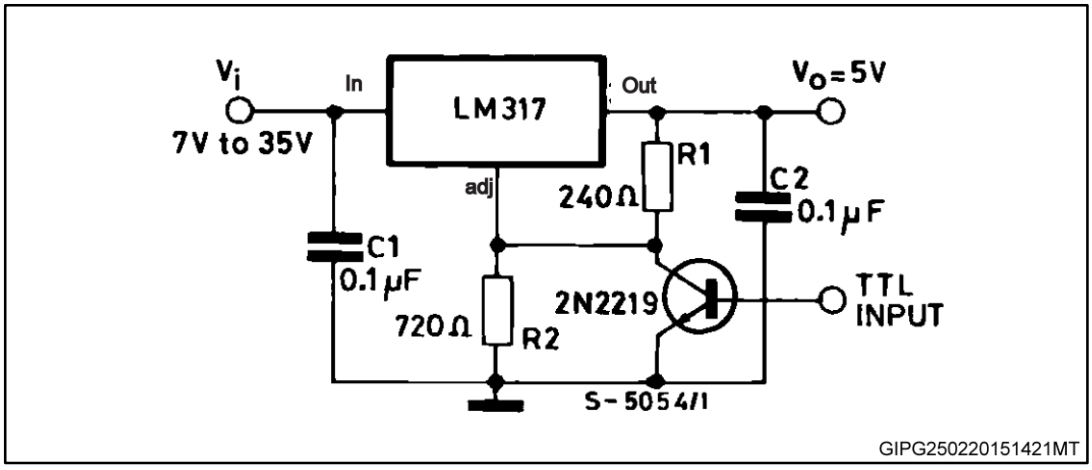

Figure 12: Digitally selected outputs

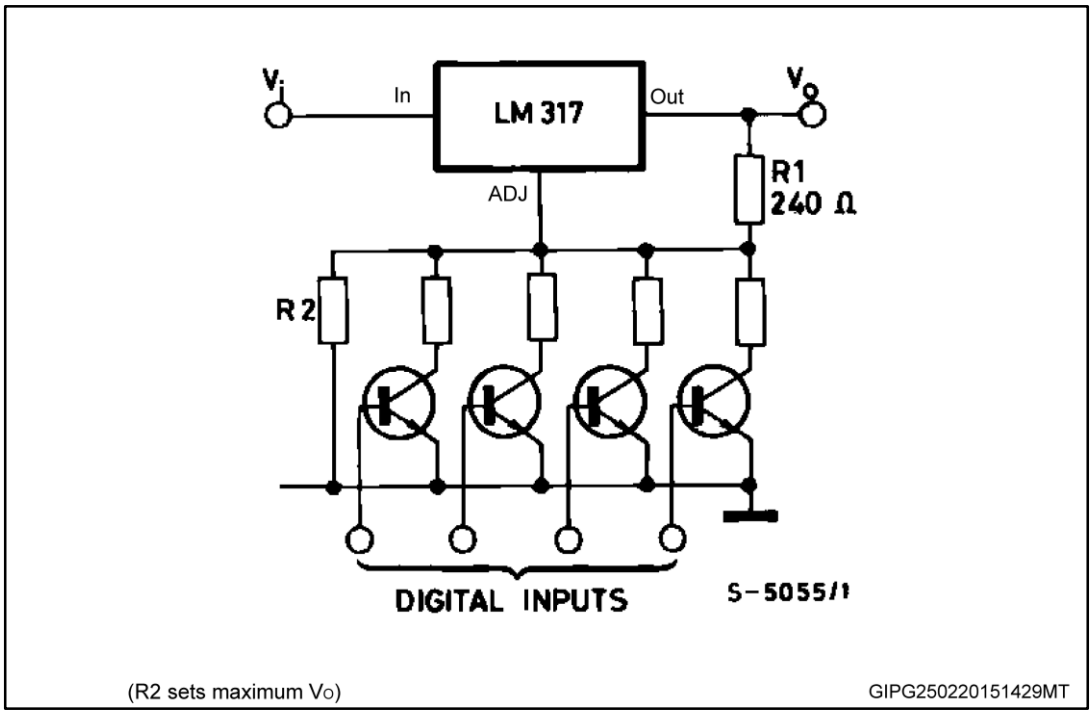

Distributor of STMicroelectronics: Excellent Integrated System Limited
Datasheet of LM317MDT-TR - IC REG LDO ADJ 0.5A DPAK
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

8 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: ***www.st.com***. ECOPACK® is an ST trademark.

8.1 DPAK (TO-252) package information

Figure 13: DPAK (TO-252) package outline

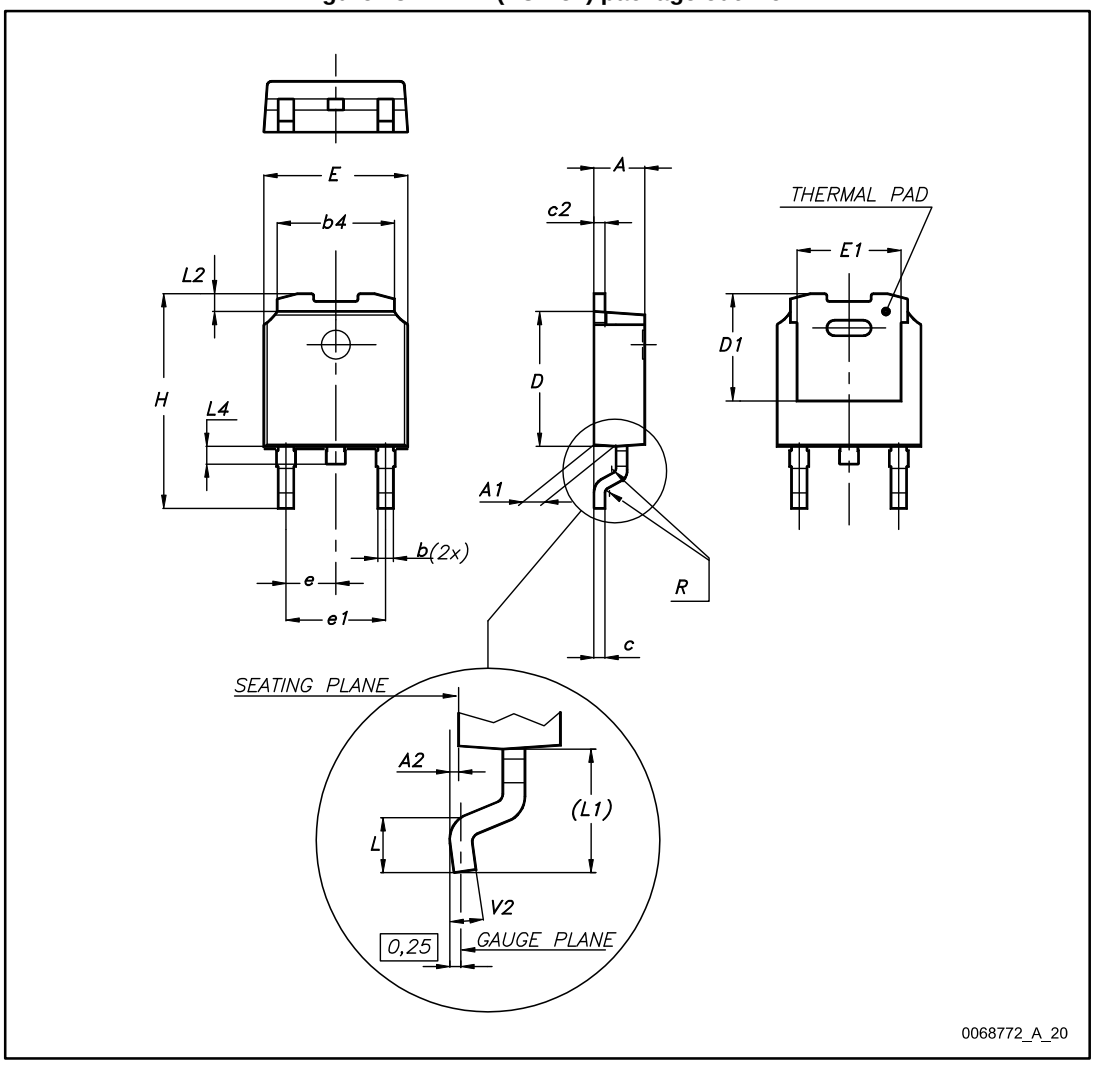

Distributor of STMicroelectronics: Excellent Integrated System Limited
Datasheet of LM317MDT-TR - IC REG LDO ADJ 0.5A DPAK
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Table 6: DPAK (TO-252) mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A	2.20		2.40
A1	0.90		1.10
A2	0.03		0.23
b	0.64		0.90
b4	5.20		5.40
c	0.45		0.60
c2	0.48		0.60
D	6.00		6.20
D1		5.10	
E	6.40		6.60
E1		4.70	
e		2.28	
e1	4.40		4.60
H	9.35		10.10
L	1.00		1.50
(L1)		2.80	
L2		0.80	
L4	0.60		1.00
R		0.20	
V2	0°		8°

Distributor of STMicroelectronics: Excellent Integrated System Limited
Datasheet of LM317MDT-TR - IC REG LDO ADJ 0.5A DPAK
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Figure 14: DPAK (TO-252) recommended footprint (dimensions are in mm)

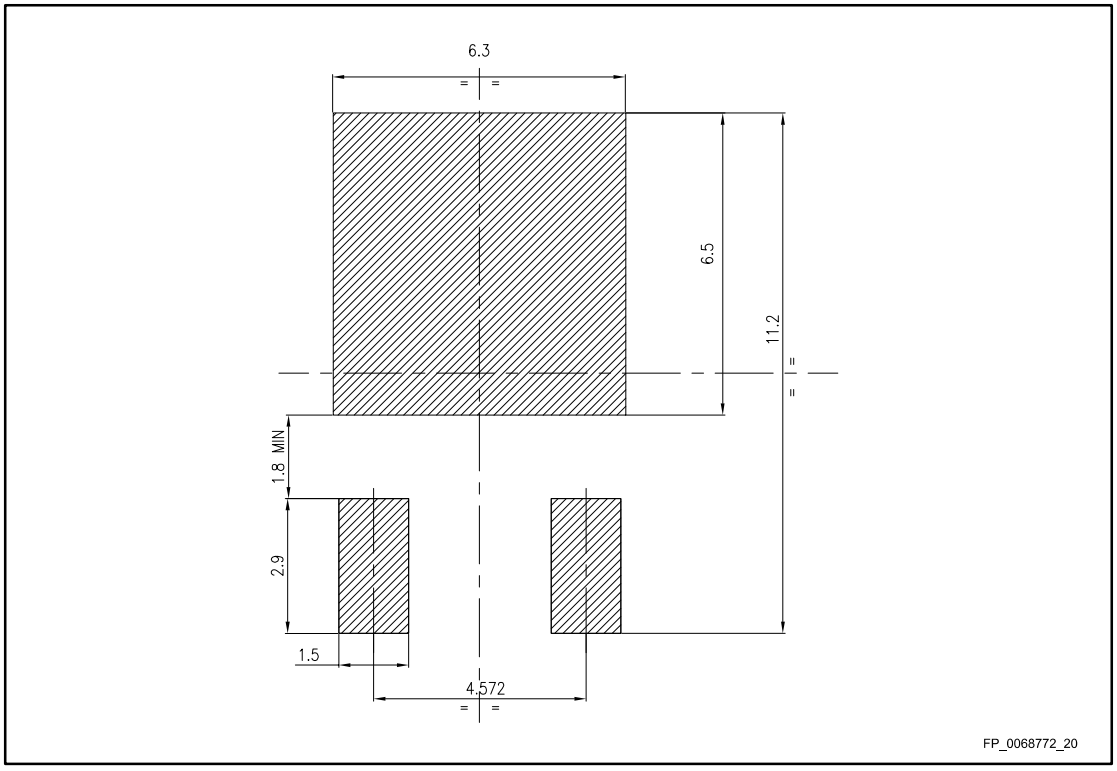

Distributor of STMicroelectronics: Excellent Integrated System Limited
Datasheet of LM317MDT-TR - IC REG LDO ADJ 0.5A DPAK
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

8.2 DPAK (TO-252) packing information

Figure 15: DPAK (TO-252) tape outline

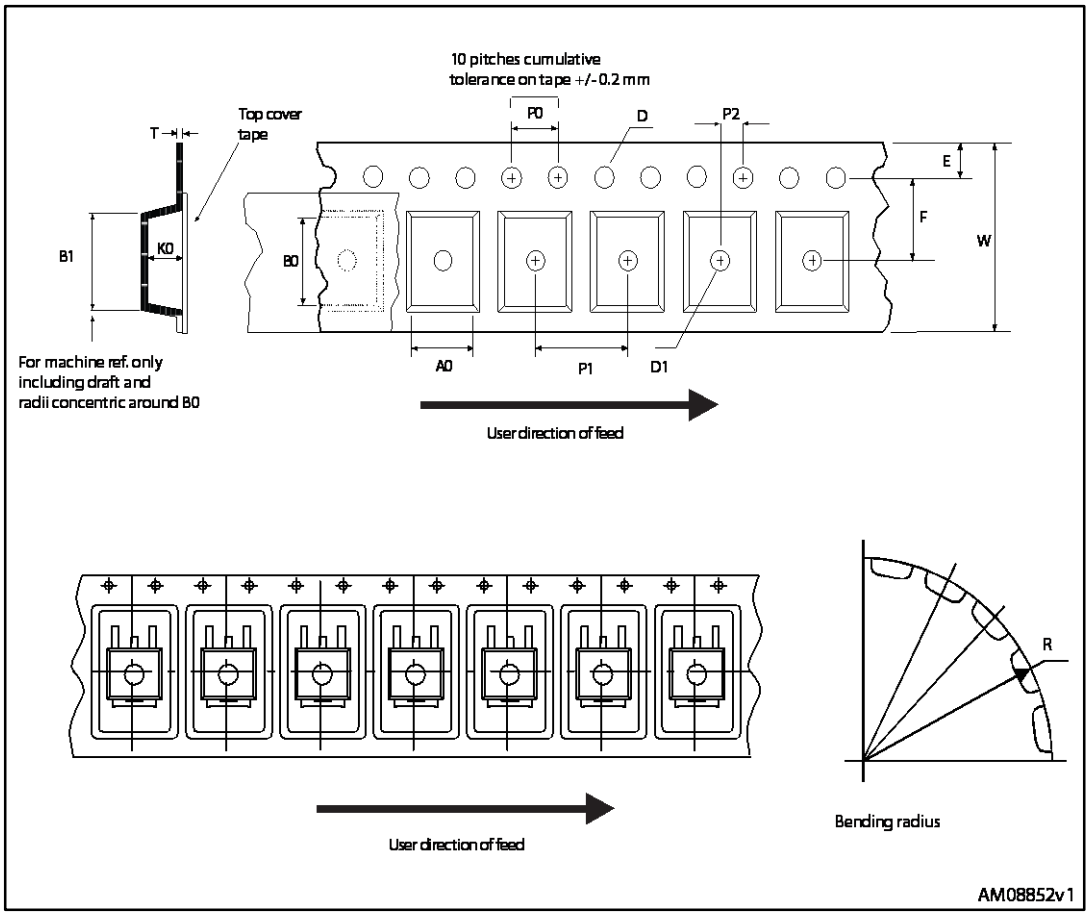

Distributor of STMicroelectronics: Excellent Integrated System Limited
Datasheet of LM317MDT-TR - IC REG LDO ADJ 0.5A DPAK
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Figure 16: DPAK (TO-252) reel outline

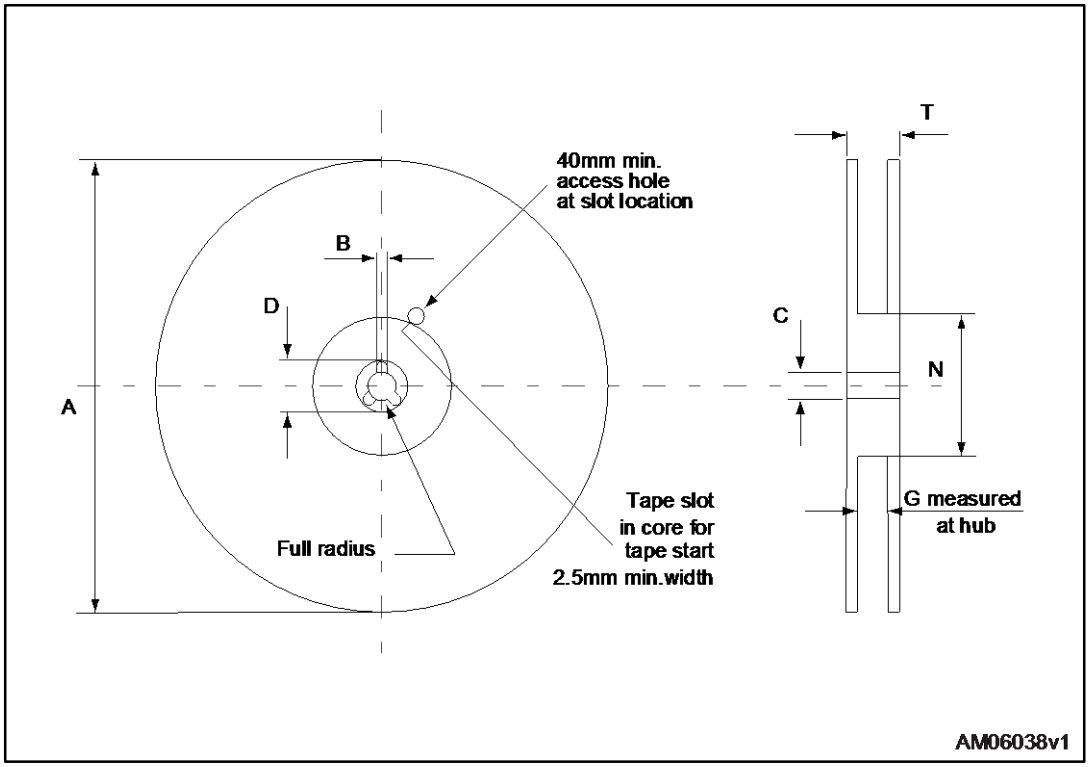

Table 7: DPAK (TO-252) tape and reel mechanical data

Tape			Reel		
Dim.	mm		Dim.	mm	
	Min.	Max.		Min.	Max.
A0	6.8	7	A		330
B0	10.4	10.6	B	1.5	
B1		12.1	C	12.8	13.2
D	1.5	1.6	D	20.2	
D1	1.5		G	16.4	18.4
E	1.65	1.85	N	50	
F	7.4	7.6	T		22.4
K0	2.55	2.75			
P0	3.9	4.1	Base qty.		2500
P1	7.9	8.1	Bulk qty.		2500
P2	1.9	2.1			
R	40				
T	0.25	0.35			
W	15.7	16.3			

Distributor of STMicroelectronics: Excellent Integrated System Limited
Datasheet of LM317MDT-TR - IC REG LDO ADJ 0.5A DPAK
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

9 Revision history

Table 8: Document revision history

Date	Revision	Changes
21-Jun-2004	5	The document has been reformatted.
06-Dec-2006	6	DPAK mechanical data updated, added footprint data.
11-Feb-2008	7	Added: Table 1 on page 1.
07-Jul-2014	8	Updated Table 1: Device summary. Updated Section 8.1: TO-220 and Section 8.2: DPAK. Updated Figure 3, Figure 6, Figure 8, Figure 9, Figure 10, Figure 11, Figure 12. Minor text changes.
16- Oct-2015	9	Removed TO-220 package. Updated description in cover page, *Table 1: "Device summary"*, *Figure 2: "Pin connections (top view)"*, *Table 3: "Thermal data"* and *Section 8: "Package information"*. Minor text changes.

Distributor of STMicroelectronics: Excellent Integrated System Limited
Datasheet of LM317MDT-TR - IC REG LDO ADJ 0.5A DPAK
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2015 STMicroelectronics – All rights reserved