

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[86564510067LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

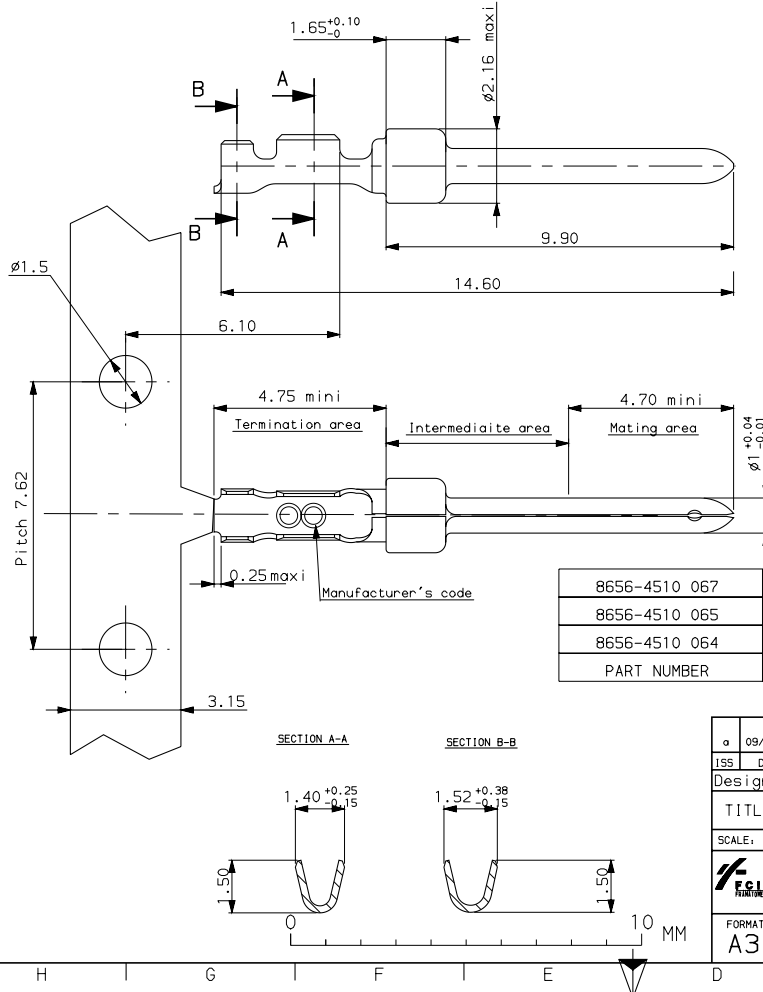

NOTES

1. Material: brass, thickness 0.20
2. Finish : see table.
3. Wire range: #24 to #28AWG
4. Max. outer diameter of insulated wire: 1.02mm
5. Current carrying capacity of individual contacts:
 - 3.0Amps max. when crimped to #24AWG
 - 2.0Amps max. when crimped to #26AWG
 - 1.5Amps max. when crimped to #28AWG
6. After 5 insertions into male connector, contact must be retained in housing when subjected to a 5 pound axial pull
7. When contact is crimped to #24AWG, the insulation support crimp height must be 1.78mm max. to ensure proper insertion into housing
8. Packaging : See drawing C01-8656-0522

8656-4510 067	1 μ Ni+2 μ SnPb Min	1 μ Ni Mini	2 μ Ni+0.40 μ Au Min
8656-4510 065	1 μ Ni+2 μ SnPb Min	1 μ Ni Mini	3 μ Ni+0.75 μ Au Min
8656-4510 064	1 μ Ni+2 μ SnPb Min	1 μ Ni Mini	2 μ Ni+Flash Au
PART NUMBER	Termination area	Intermediate area	Mating area

a	09/05/00	Creation of drawing	--
ISS	DATE	Latest modification by : BOUTTIER	MOD N°
Designed by: BOUTTIER date: 09/05/00			Type of drawing: CLIENT
TITLE : PIN CONTACT #24 TO #28 AWG (removable crimp contact.)			SHEET 1/1
SCALE: 10		FRAMATOME CONNECTORS FRANCE Rue Louis Breguet - BP 05 72024 LE MANS Cedex Tel.: 33 (16) 43.84.08.43	
FORMAT A3		SOURIAU DRG N° C01-8656-0428	
		PROJECT M94D001	