

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[EPCOS \(TDK\)](#)  
[B39841B7723C610](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



# SAW Components

Data Sheet B7723

Data Sheet

A large, stylized graphic of a globe with the word "EPCOS" written across it in a large, white, sans-serif font. The globe is rendered in shades of gray and white, with the word "EPCOS" appearing to be superimposed on the globe's surface.



<b>SAW Components</b>	<b>B7723</b>
<b>Low-Loss Filter for Mobile Communication</b>	<b>836,5 MHz</b>



Data Sheet



**Chip sized SAW package DCS6I**

**Features**

- Low-loss RF filter for mobile telephone GSM 850 systems, transmit path
- Low amplitude ripple
- Usable passband 25 MHz
- Balanced to unbalanced operation
- Impedance transformation from 200 Ω to 50 Ω
- Ceramic package for **Surface Mounted Technology (SMT)**

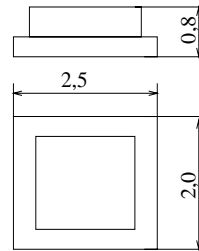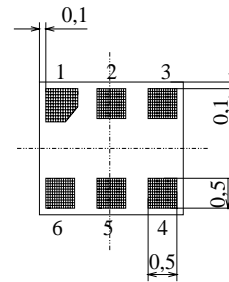


Dimensions in mm, approx. weight 0,014g

**Terminals**

- Ni, gold-plated

**Pin configuration**

- |         |                   |
|---------|-------------------|
| 4, 6    | Balanced input    |
| 2       | Unbalanced output |
| 1, 3, 5 | To be grounded    |

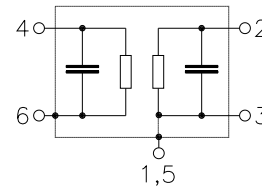

Type	Ordering code	Marking and Package according to	Packing according to
B7723	B39841-B7723-C610	C61157-A7-A76	F61074-V8112-Z000

Electrostatic Sensitive Device (ESD)

**Maximum ratings**

Operable temperature range	$T$	- 30 / + 85	°C	Source impedance 200 Ω peak power of GSM 850 signal, duty cycle 1:4
Storage temperature range	$T_{stg}$	- 40 / + 85	°C	
DC voltage	$V_{DC}$	5	V	
ESD	$V_{ESD}$	50	V	
Input power max.	$P_{IN}$	15	dBm	



<b>SAW Components</b>	<b>B7723</b>
<b>Low-Loss Filter for Mobile Communication</b>	<b>836,5 MHz</b>

Data Sheet




Characteristics

Operating temperature range:  $T = 25 \pm 2^\circ\text{C}$   
 Terminating source impedance:  $Z_S = 200 \Omega // 56 \text{ nH}$  (balanced)  
 Terminating load impedance:  $Z_L = 50 \Omega$  (unbalanced)

		min.	typ.	max.	
<b>Center frequency</b>	$f_C$	—	836,5	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\text{max}}$	—	2,1	2,3	dB
824,0 ... 849,0 MHz					
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	—	0,6	0,8	dB
824,0 ... 849,0 MHz					
<b>Balanced input VSWR</b>		—	1,7	2,0	
824,0 ... 849,0 MHz					
<b>Unbalanced output VSWR</b>		—	1,7	2,0	
824,0 ... 849,0 MHz					
<b>Differential to Common mode Suppression</b>	$S_{\text{sc}12}$				
0,1 ... 804,0 MHz		20	50	—	dB
824,0 ... 849,0 MHz		20	25	—	dB
869,0 ... 6000,0 MHz		20	35	—	dB
<b>Attenuation</b>	$\alpha$				
0,0 ... 800,0 MHz		42	54	—	dB
869,0 ... 894,0 MHz		27	30	—	dB
894,0 ... 1000,0 MHz		30	40	—	dB
1000,0 ... 3000,0 MHz		40	46	—	dB
3000,0 ... 4000,0 MHz		30	36	—	dB
4000,0 ... 6000,0 MHz		23	28	—	dB
<b>Rx band suppression</b>	$\alpha$				
869,0 ... 894,0 MHz		27	30	—	dB

Test matching network

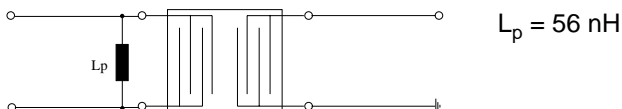



<b>SAW Components</b>	<b>B7723</b>
<b>Low-Loss Filter for Mobile Communication</b>	<b>836,5 MHz</b>


**Data Sheet Characteristics**



Operating temperature range:  $T = -30$  to  $85\text{ }^{\circ}\text{C}$   
 Terminating source impedance:  $Z_S = 200\ \Omega // 56\ \text{nH}$  (balanced)  
 Terminating load impedance:  $Z_L = 50\ \Omega$  (unbalanced)

		min.	typ.	max.	
<b>Center frequency</b>	$f_C$	—	836,5	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\text{max}}$	—	2,3	2,5	dB
824,0 ... 849,0 MHz					
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	—	0,8	1,0	dB
824,0 ... 849,0 MHz					
<b>Balanced input VSWR</b>		—	1,7	2,0	
824,0 ... 849,0 MHz					
<b>Unbalanced output VSWR</b>		—	1,7	2,0	
824,0 ... 849,0 MHz					
<b>Differential to Common mode Suppression</b>	$S_{\text{sc}12}$				
0,1 ... 804,0 MHz		20	50	—	dB
824,0 ... 849,0 MHz		20	25	—	dB
869,0 ... 6000,0 MHz		20	35	—	dB
<b>Attenuation</b>	$\alpha$				
0,0 ... 800,0 MHz		40	54	—	dB
869,0 ... 894,0 MHz		25	30	—	dB
894,0 ... 1000,0 MHz		30	40	—	dB
1000,0 ... 3000,0 MHz		40	46	—	dB
3000,0 ... 4000,0 MHz		30	36	—	dB
4000,0 ... 6000,0 MHz		23	28	—	dB
<b>Rx band suppression</b>	$\alpha$				
869,0 ... 894,0 MHz		25	30	—	dB


**Test matching network**

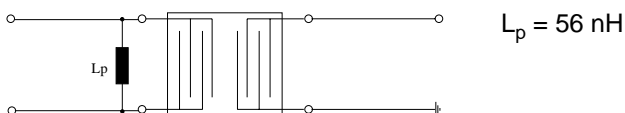




<b>SAW Components</b>	<b>B7723</b>
<b>Low-Loss Filter for Mobile Communication</b>	<b>836,5 MHz</b>
<b>Data Sheet</b>	<b>SMD</b>

**Transfer function (spec at 25° C)**

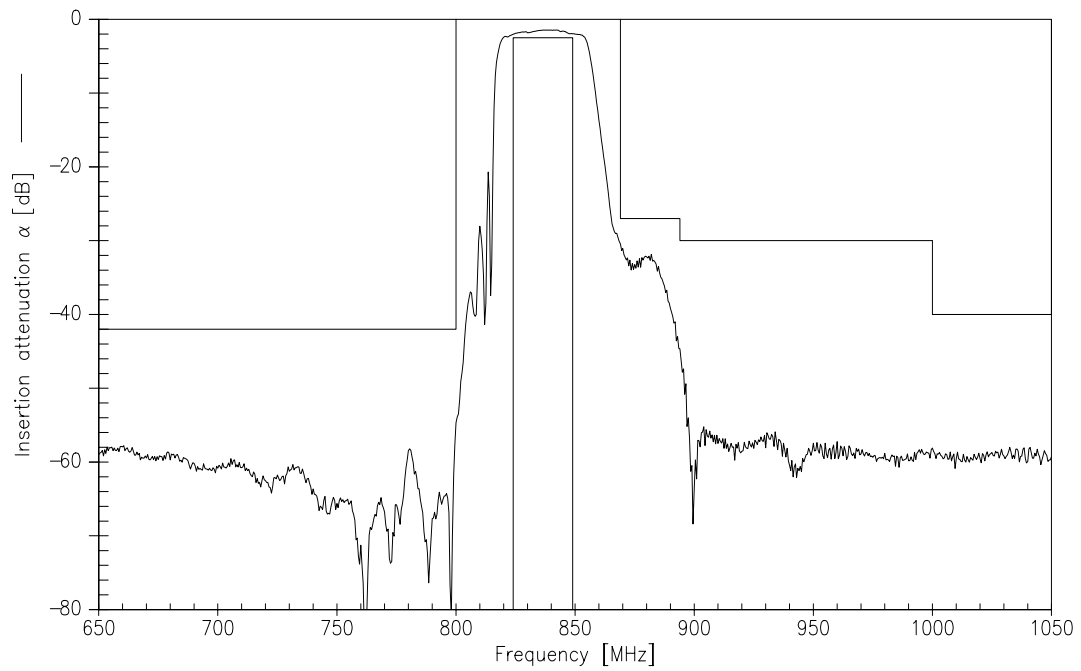

**Transfer function (wideband)**

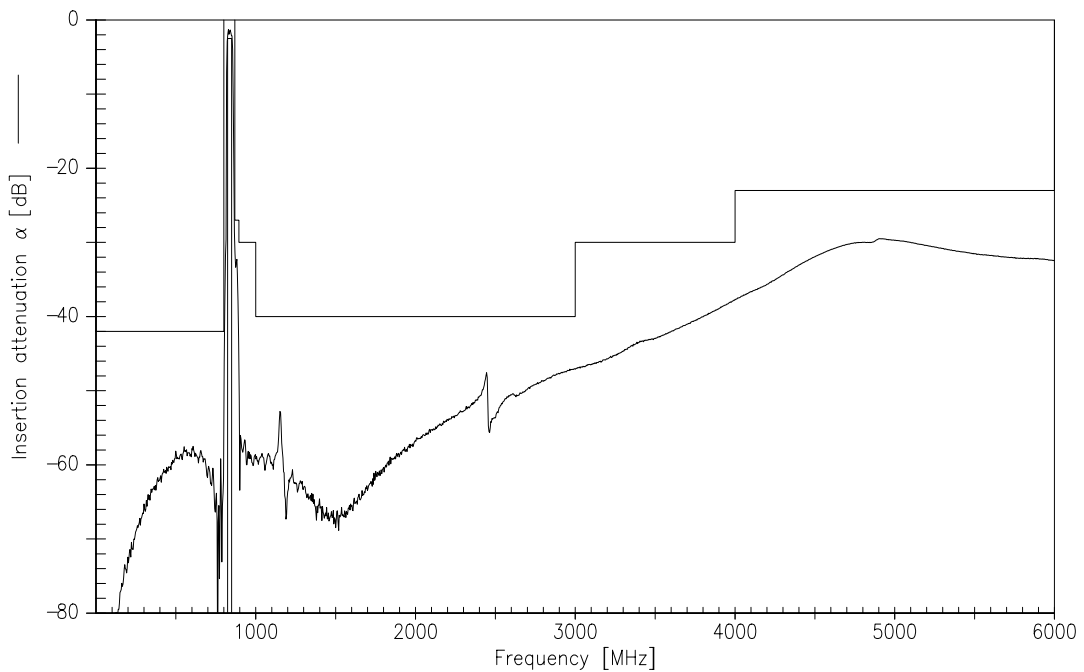



SAW Components

B7723



Low-Loss Filter for Mobile Communication

836,5 MHz

Data Sheet



**Matching** (measurement including calculated matching network; S11 is balanced input )

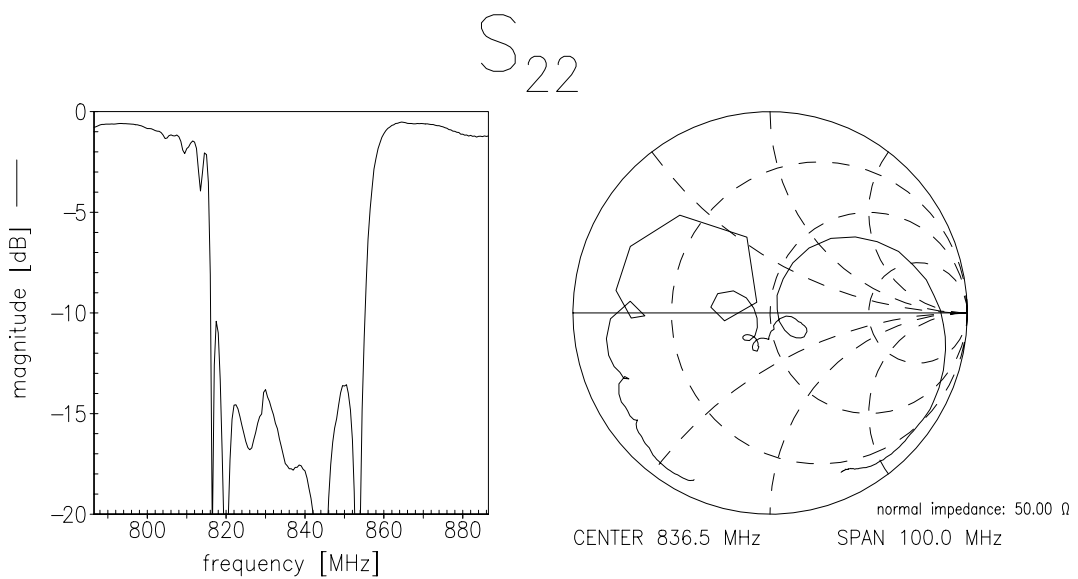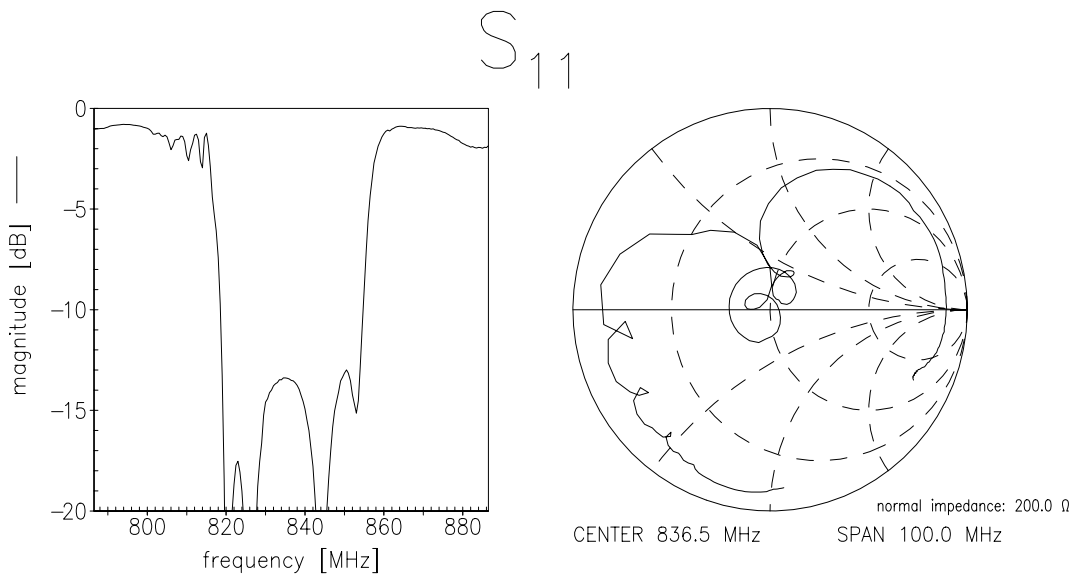



<b>SAW Components</b>	<b>B7723</b>
<b>Low-Loss Filter for Mobile Communication</b>	<b>836,5 MHz</b>
Data Sheet	

**Published by EPCOS AG**  
**Surface Acoustic Wave Components Division, SAW MC WT PD**  
**P.O. Box 80 17 09, D-81617 München**

© EPCOS AG 2000. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.