

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Omron](#)

[G3VM-61B1](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

# G3VM-61B1/E1

## MOS FET Relays

### Analog-switching MOS FET Relays for High Switching Currents, with Dielectric Strength of 2.5 kVAC between I/O.



- Upgraded G3VM-61B/E Series.
- Switches minute analog signals.
- Leakage current of 1  $\mu\text{A}$  max. when output relay is open.

RoHS compliant

#### Application Examples

- Test & Measurement equipment
- Security equipment
- Amusement equipment

#### Terminal Arrangement/Internal Connections

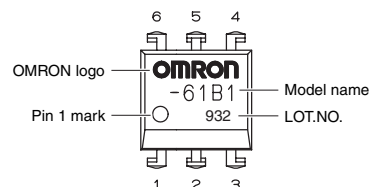

Note: The actual product is marked differently from the image shown here.

Note: The actual product is marked differently from the image shown here.

#### List of Models

Package type	Contact form	Terminals	Load voltage (peak value) *	Model	Minimum package quantity	
					Number per tube	Number per tape and reel
DIP6	1a (SPST-NO)	PCB Terminals	60 V	G3VM-61B1	50	-
		Surface-mounting Terminals		G3VM-61E1		
				G3VM-61E1 (TR)	-	1,500


\* The AC peak and DC value are given for the load voltage.

#### Absolute Maximum Ratings (Ta = 25°C)

Item			Symbol	Rating	Unit	Measurement conditions
Input	LED forward current		I <sub>F</sub>	50	mA	
	Repetitive peak LED forward current		I <sub>FP</sub>	1	A	100 μs pulses, 100 pps
	LED forward current reduction rate		ΔI <sub>F</sub> /°C	−0.5	mA/°C	T <sub>a</sub> ≥ 25°C
	LED reverse voltage		V <sub>R</sub>	5	V	
	Connection temperature		T <sub>J</sub>	125	°C	
Output	Load voltage (AC peak/DC)		V <sub>OFF</sub>	60	V	
	Continuous load current	Connection A	I <sub>O</sub>	500	mA	Connection A: AC peak/DC Connection B and C: DC
		Connection B		500		
		Connection C		1000		
	ON current reduction rate	Connection A	ΔI <sub>O</sub> /°C	−5	mA/°C	T <sub>a</sub> ≥ 25°C
		Connection B		−5		
		Connection C		−10		
	Connection temperature		T <sub>J</sub>	125	°C	
	Dielectric strength between I/O (See note 1.)		V <sub>I-O</sub>	2500	V <sub>RMS</sub>	AC for 1 min
Ambient operating temperature		T <sub>a</sub>	−40 to +85	°C	With no icing or condensation	
Ambient storage temperature		T <sub>stg</sub>	−55 to +125	°C	With no icing or condensation	
Soldering temperature		-	260	°C	10 s	

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.


#### Connection Diagram

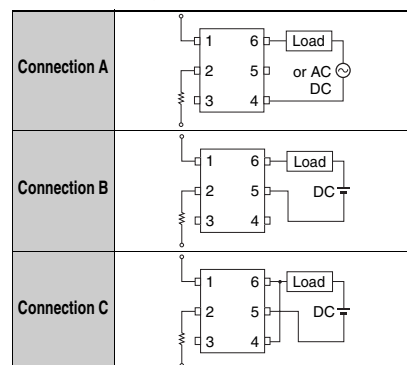

#### Electrical Characteristics (Ta = 25°C)

Item	Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Input	LED forward voltage	VF	1.0	1.15	V	IF = 10 mA
	Reverse current	IR	-	10	$\mu\text{A}$	VR = 5 V
	Capacity between terminals	CT	30	-	pF	V = 0, f = 1 MHz
	Trigger LED forward current	IFT	1.6	3	mA	Io = 500 mA
Output	Maximum resistance with output ON	Connection A	-	1	$\Omega$	IF = 5 mA, Io = 500 mA
		Connection B	-	0.5	$\Omega$	IF = 5 mA, Io = 500 mA
		Connection C	-	0.25	$\Omega$	IF = 5 mA, Io = 1000 mA
	Current leakage when the relay is open	ILEAK	-	1.0	$\mu\text{A}$	VOFF = 60 V
	Capacity between terminals	COFF	130	-	pF	V = 0, f = 1 MHz
	Capacity between I/O terminals	CI-O	0.8	-	pF	f = 1 MHz, Vs = 0 V
	Insulation resistance between I/O terminals	RI-O	1000	-	M $\Omega$	VI-O = 500 VDC, RoH $\leq$ 60%
Turn-ON time		tON	0.8	2.0	ms	IF = 5 mA, RL = 200 $\Omega$ , VDD = 20 V (See note 2.)
Turn-OFF time		tOFF	0.1	0.5	ms	

Note: 2. Turn-ON and Turn-OFF Times



# G3VM-61B1/E1

## MOS FET Relays


### Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.


Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	$V_{DD}$	-	-	48	V
Operating LED forward current	$I_F$	5	7.5	25	mA
Continuous load current (AC peak/DC)	$I_o$	-	-	500	mA
Ambient operating temperature	$T_a$	-20	-	65	°C

### Engineering Data


**LED forward current vs. Ambient temperature**

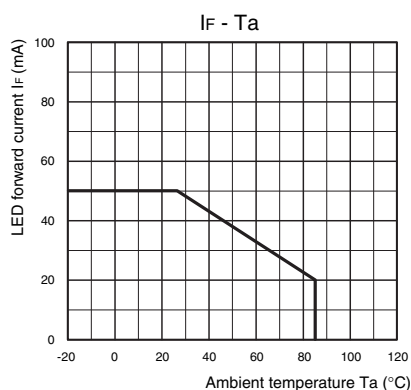


**Continuous load current vs. Ambient temperature**

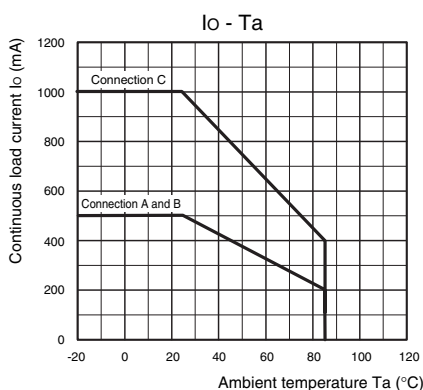


**LED forward current vs. LED forward voltage**

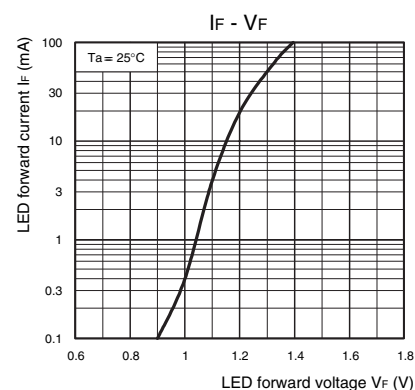


**Continuous load current vs. On-state voltage**

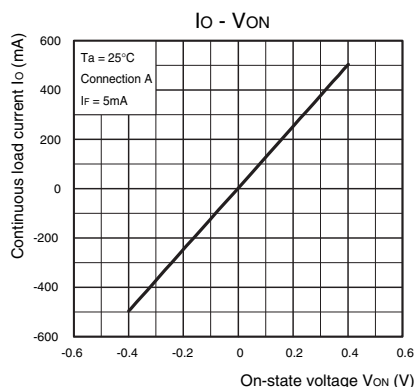


**On-state resistance vs. Ambient temperature**

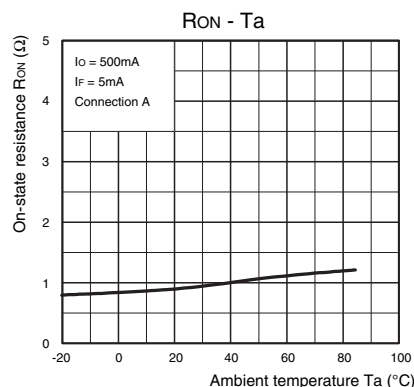


**Trigger LED forward current vs. Ambient temperature**

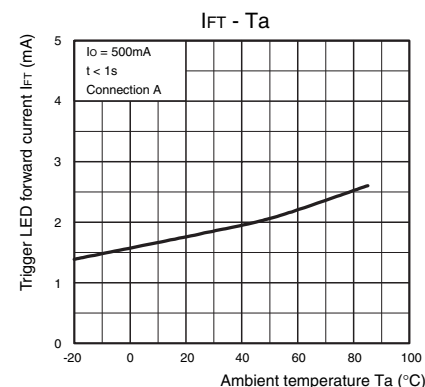


**Turn ON, Turn OFF time vs. LED forward current**

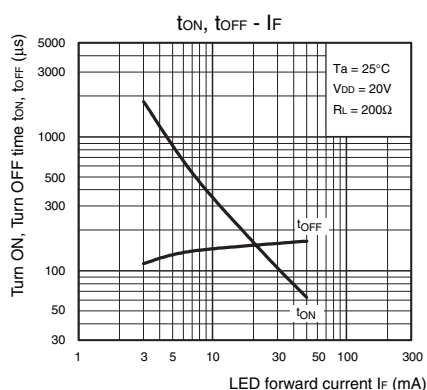

**Turn ON, Turn OFF time vs. Ambient temperature**

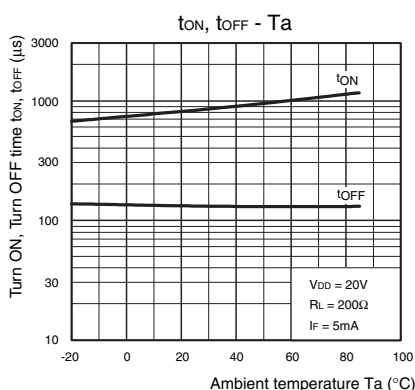

**Current leakage vs. Ambient temperature**

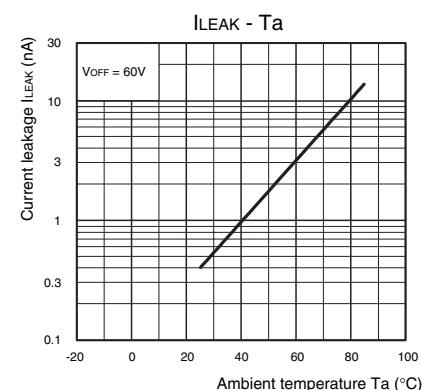

### Safety Precautions

- Refer to "Common Precautions" for all G3VM models.


# Appearance/Dimensions

## DIP6 type

### ■ Appearance

#### DIP (Dual Inline Package)

DIP6

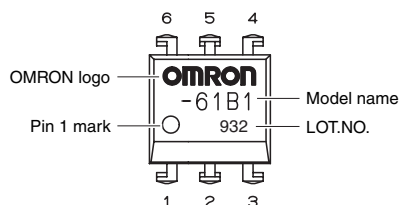

Note: The actual product is marked differently from the image shown here.



### ■ Dimensions

(Unit:mm)




#### PCB Terminals

Weight: 0.4 g

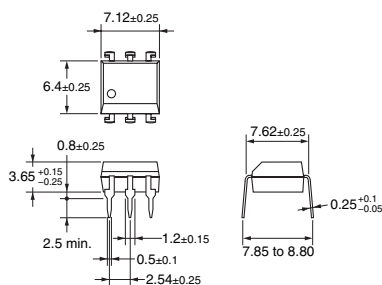


#### Surface-mounting Terminals

Weight: 0.4 g

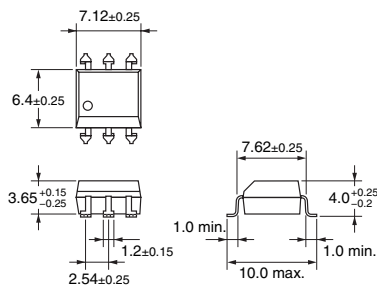


#### PCB Dimensions (BOTTOM VIEW)



#### Actual Mounting Pad Dimensions

(Recommended Value, TOP VIEW)



Note: The actual product is marked differently from the image shown here.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.