## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Pomona Electronics 5953A

For any questions, you can email us directly: <a href="mailto:sales@integrated-circuit.com">sales@integrated-circuit.com</a>


### Distributor of Pomona Electronics: Excellent Integrated System Limited

Datasheet of 5953A - PROBE RETR TIP DMM RT ANG PLUG

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

# **Pomona**®

## Model 5953A Adjustable Tip Test Probe Set

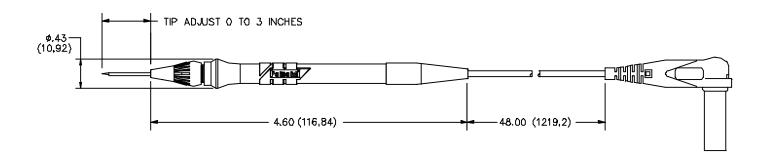

#### **FEATURES:**

- Slim retractable probe is fully insulated to within 1/8" of tip.
- Needle point tip adjusts to desired length from 0 to 3" (0 to 76mm)
- Stainless steel needle sharp point easily pierces varnish and thin insulation.
- Tip can be re-pointed if necessary.
- Shrouded banana plug is designed to fit most popular digital multimeter jacks.
- Banana plug molded directly to the wire for robust pull strength.
- Banana plug spring is nickel plated Beryllium Copper for long insertion life.
- 4-foot test lead wire is silicone insulated for high temperature resistance. Also remains flexible low temperature

#### **MATERIALS:**

Probe: Polypropylene and PVC, black and red

Tip: Stainless steel

Wire: 20 AWG, Silicone insulation

#### **RATINGS:**

UL-3111, EN61010-2-031, IEC 1010-2-031, Cat II 600V

Operating Voltage: 600 Max

Current: 3 Amperes

#### **ORDERING INFORMATION:** Model 5953A

Includes a set of one black and one red test lead

All dimensions are in inches and metric. All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

7/3/02 SY/EH/LS Last saved by Laura Goldberg

C:\Laura Goldberg\FlukeDataSheet\d5953A\_1\_02.doc

Sales: 800-490-2361 Fax: 888-403-3360 Technical Assistance: 800-241-2060

Pomona*ACCESS* **90811** (800) 444-6785 or (425) 446-6010 More drawings available at www.pomonaelectronics.com

Page 1 of 1

at